


S:\Projects\2023\230113 - Bretta - 362 & 368 Parker Street - East Longmeadow 05 Civil 3D\230113 - EXIST.dwg

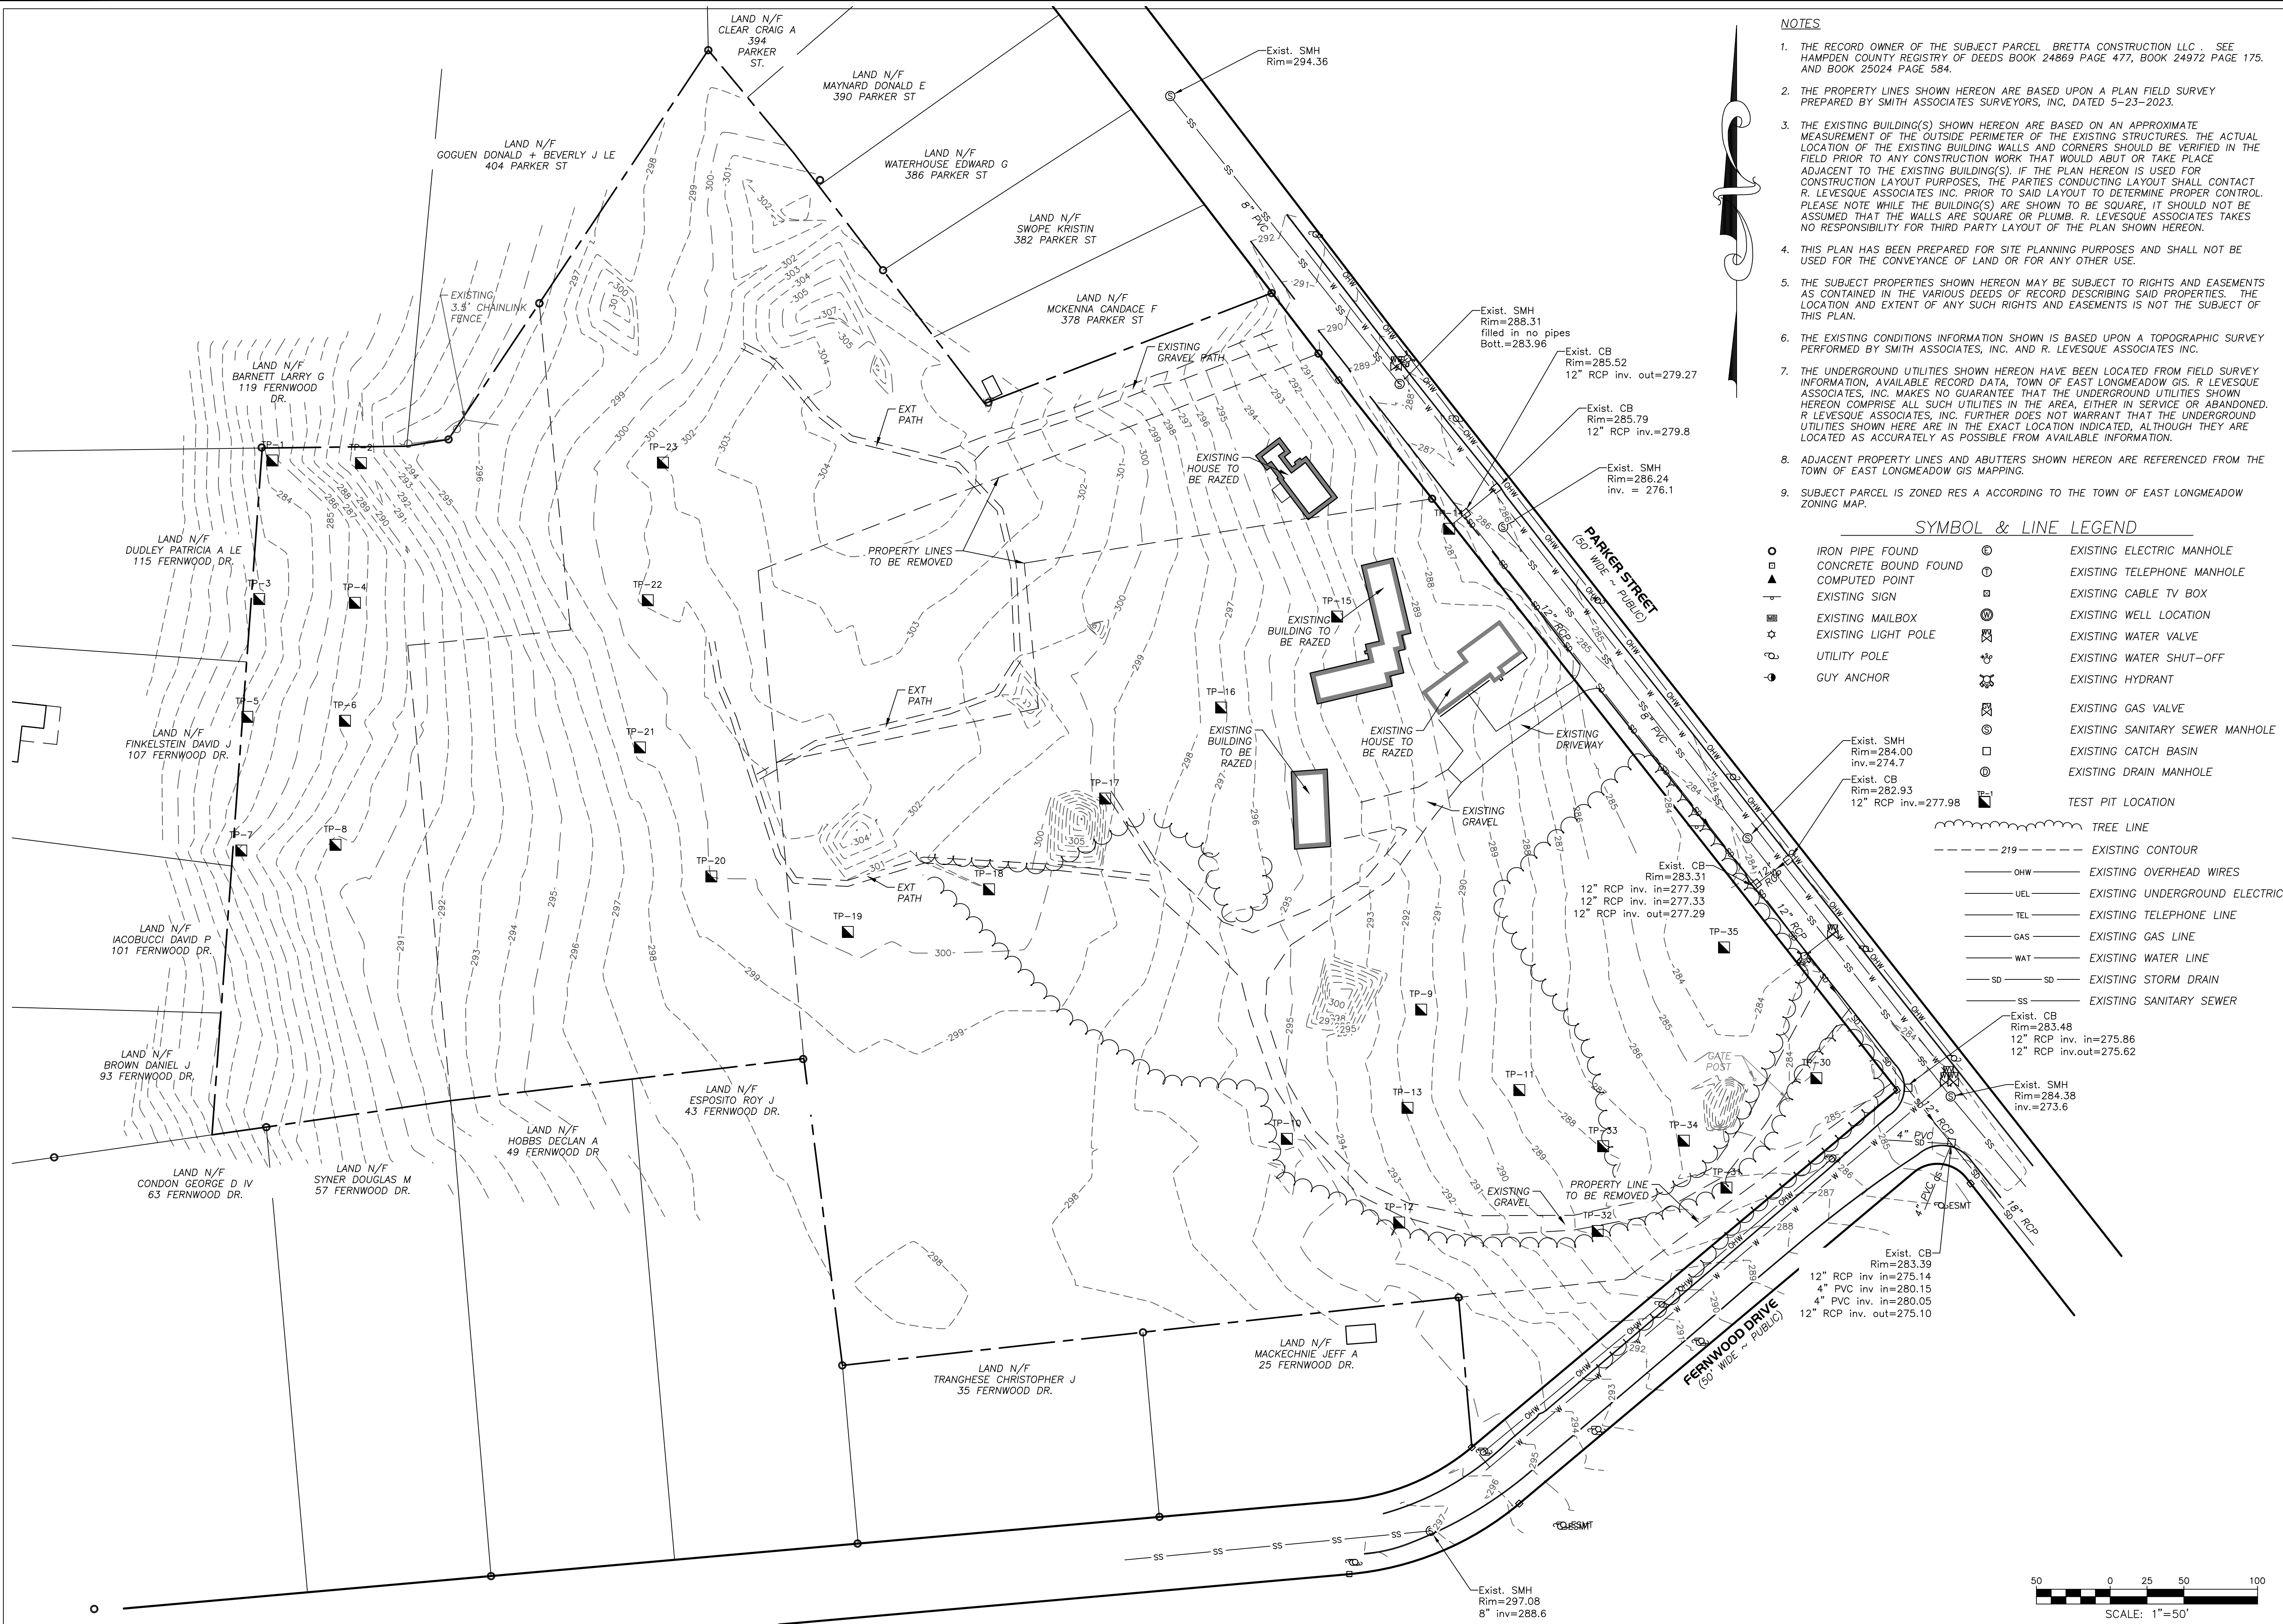


NOTES

1. THE RECORD OWNER OF THE SUBJECT PARCEL, BRETТА CONSTRUCTION LLC, SEE HAMPDEN COUNTY REGISTRY OF DEEDS BOOK 24869 PAGE 477, BOOK 24972 PAGE 175, AND BOOK 25024 PAGE 584.
2. THE PROPERTY LINES SHOWN HEREON ARE BASED UPON A PLAN FIELD SURVEY PREPARED BY SMITH ASSOCIATES SURVEYORS, INC., DATED 5-23-2023.
3. THE EXISTING BUILDING(S) SHOWN HEREON ARE BASED ON AN APPROXIMATE MEASUREMENT OF THE OUTSIDE PERIMETER OF THE EXISTING STRUCTURES. THE ACTUAL LOCATION OF THE EXISTING BUILDING WALLS AND CORNERS SHOULD BE VERIFIED IN THE FIELD PRIOR TO ANY CONSTRUCTION WORK THAT WOULD ABUT OR TAKE PLACE ADJACENT TO THE EXISTING BUILDING(S). IF THE PLAN HEREON IS USED FOR CONSTRUCTION LAYOUT PURPOSES, THE PARTIES CONDUCTING LAYOUT SHALL CONTACT R. LEVESQUE ASSOCIATES INC. PRIOR TO SAID LAYOUT TO DETERMINE PROPER CONTROL. PLEASE NOTE WHILE THE BUILDING(S) ARE SHOWN TO BE SQUARE, IT SHOULD NOT BE ASSUMED THAT THE WALLS ARE SQUARE OR PLUMB. R. LEVESQUE ASSOCIATES TAKES NO RESPONSIBILITY FOR THIRD PARTY LAYOUT OF THE PLAN SHOWN HEREON.
4. THIS PLAN HAS BEEN PREPARED FOR SITE PLANNING PURPOSES AND SHALL NOT BE USED FOR THE CONVEYANCE OF LAND OR FOR ANY OTHER USE.
5. THE SUBJECT PROPERTIES SHOWN HEREON MAY BE SUBJECT TO RIGHTS AND EASEMENTS AS CONTAINED IN THE VARIOUS DEEDS OF RECORD DESCRIBING SAID PROPERTIES. THE LOCATION AND EXTENT OF ANY SUCH RIGHTS AND EASEMENTS IS NOT THE SUBJECT OF THIS PLAN.
6. THE EXISTING CONDITIONS INFORMATION SHOWN IS BASED UPON A TOPOGRAPHIC SURVEY PERFORMED BY SMITH ASSOCIATES, INC. AND R. LEVESQUE ASSOCIATES INC.
7. THE UNDERGROUND UTILITIES SHOWN HEREON HAVE BEEN LOCATED FROM FIELD SURVEY INFORMATION, AVAILABLE RECORD DATA, TOWN OF EAST LONGMEADOW GIS. R. LEVESQUE ASSOCIATES, INC. MAKES NO GUARANTEE THAT THE UNDERGROUND UTILITIES SHOWN HEREON COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. R. LEVESQUE ASSOCIATES, INC. FURTHER DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN HERE ARE IN THE EXACT LOCATION INDICATED, ALTHOUGH THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM AVAILABLE INFORMATION.
8. ADJACENT PROPERTY LINES AND ABUTTERS SHOWN HEREON ARE REFERENCED FROM THE TOWN OF EAST LONGMEADOW GIS MAPPING.
9. SUBJECT PARCEL IS ZONED RES A ACCORDING TO THE TOWN OF EAST LONGMEADOW ZONING MAP.

SYMBOL & LINE LEGEND


○	IRON PIPE FOUND	⊙	EXISTING ELECTRIC MANHOLE
□	CONCRETE BOUND FOUND	⊕	EXISTING TELEPHONE MANHOLE
▲	COMPUTED POINT	⊞	EXISTING CABLE TV BOX
+	EXISTING SIGN	⊗	EXISTING WELL LOCATION
⊞	EXISTING MAILBOX	⊕	EXISTING WATER VALVE
☆	EXISTING LIGHT POLE	⊕	EXISTING WATER SHUT-OFF
⊕	UTILITY POLE	⊕	EXISTING HYDRANT
⊕	GUY ANCHOR	⊕	EXISTING GAS VALVE
		⊕	EXISTING SANITARY SEWER MANHOLE
		⊕	EXISTING CATCH BASIN
		⊕	EXISTING DRAIN MANHOLE
		⊕	TEST PIT LOCATION
		⊕	TREE LINE
		⊕	EXISTING CONTOUR
		⊕	EXISTING OVERHEAD WIRES
		⊕	EXISTING UNDERGROUND ELECTRIC
		⊕	EXISTING TELEPHONE LINE
		⊕	EXISTING GAS LINE
		⊕	EXISTING WATER LINE
		⊕	EXISTING STORM DRAIN
		⊕	EXISTING SANITARY SEWER

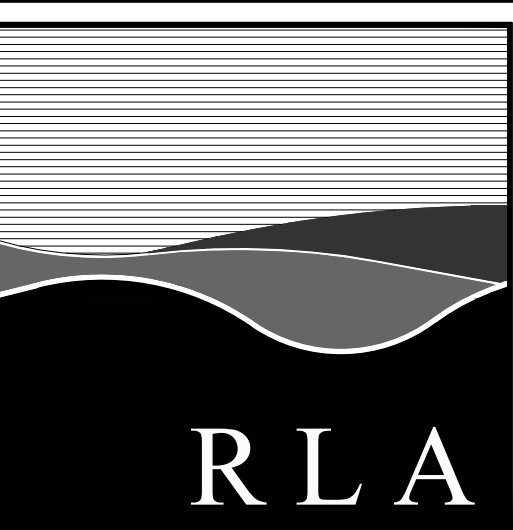

R LEVESQUE ASSOCIATES INC.
Landscape Architects
Civil Engineers - Land Surveyors
Environmental Consultants
ph: 413.568.0985 fax: 413.568.0986
40 School Street
Westfield, MA 01085
rlaland.com

EXISTING CONDITIONS PLAN

362-368 PARKER STREET
PARCEL ID: 75-10-A, 75-11-O, 63-26-O and 62-31-A+B
EAST LONGMEADOW MA.

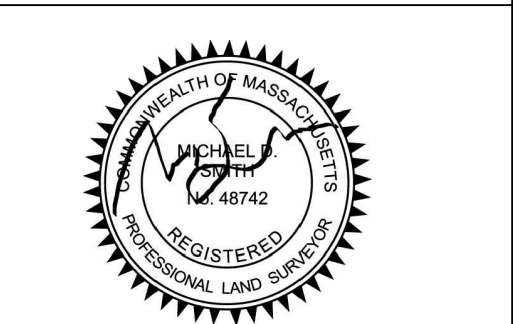

PREPARED FOR:
Bretta Construction LLC
32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023

REVISIONS:	DATE:

DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF THIS DOCUMENT IS A VIOLATION OF MASSACHUSETTS STATE LAW

SCALE: As Noted


RLA PROJ. NUMBER: 230113

DRAWING#	REV.
EX-1	-



NOTES

1. THE RECORD OWNER OF THE SUBJECT PARCEL ARE BRETТА CONSTRUCTION LLC. SEE HAMPDEN COUNTY REGISTRY OF DEEDS BOOK 24869 PAGE 477, BOOK 24972 PAGE 175 AND BOOK 25024 PAGE 584
2. THE PROPERTY LINES SHOWN HEREON ARE BASED UPON A PLAN FIELD SURVEY PREPARED BY SMITH ASSOCIATES SURVEYORS, INC, DATED 5-23-2023.
3. THE SUBJECT PROPERTIES SHOWN HEREON MAY BE SUBJECT TO RIGHTS AND EASEMENTS AS CONTAINED IN THE VARIOUS DEEDS OF RECORD DESCRIBING SAID PROPERTIES. THE LOCATION AND EXTENT OF ANY SUCH RIGHTS AND EASEMENTS IS NOT THE SUBJECT OF THIS PLAN.
4. ADJACENT PROPERTY LINES AND ABUTTERS SHOWN HEREON ARE REFERENCED FROM THE TOWN OF EAST LONGMEADOW GIS MAPPING.
5. SUBJECT PARCEL IS ZONED RES A ACCORDING TO THE TOWN OF EAST LONGMEADOW ZONING MAP.

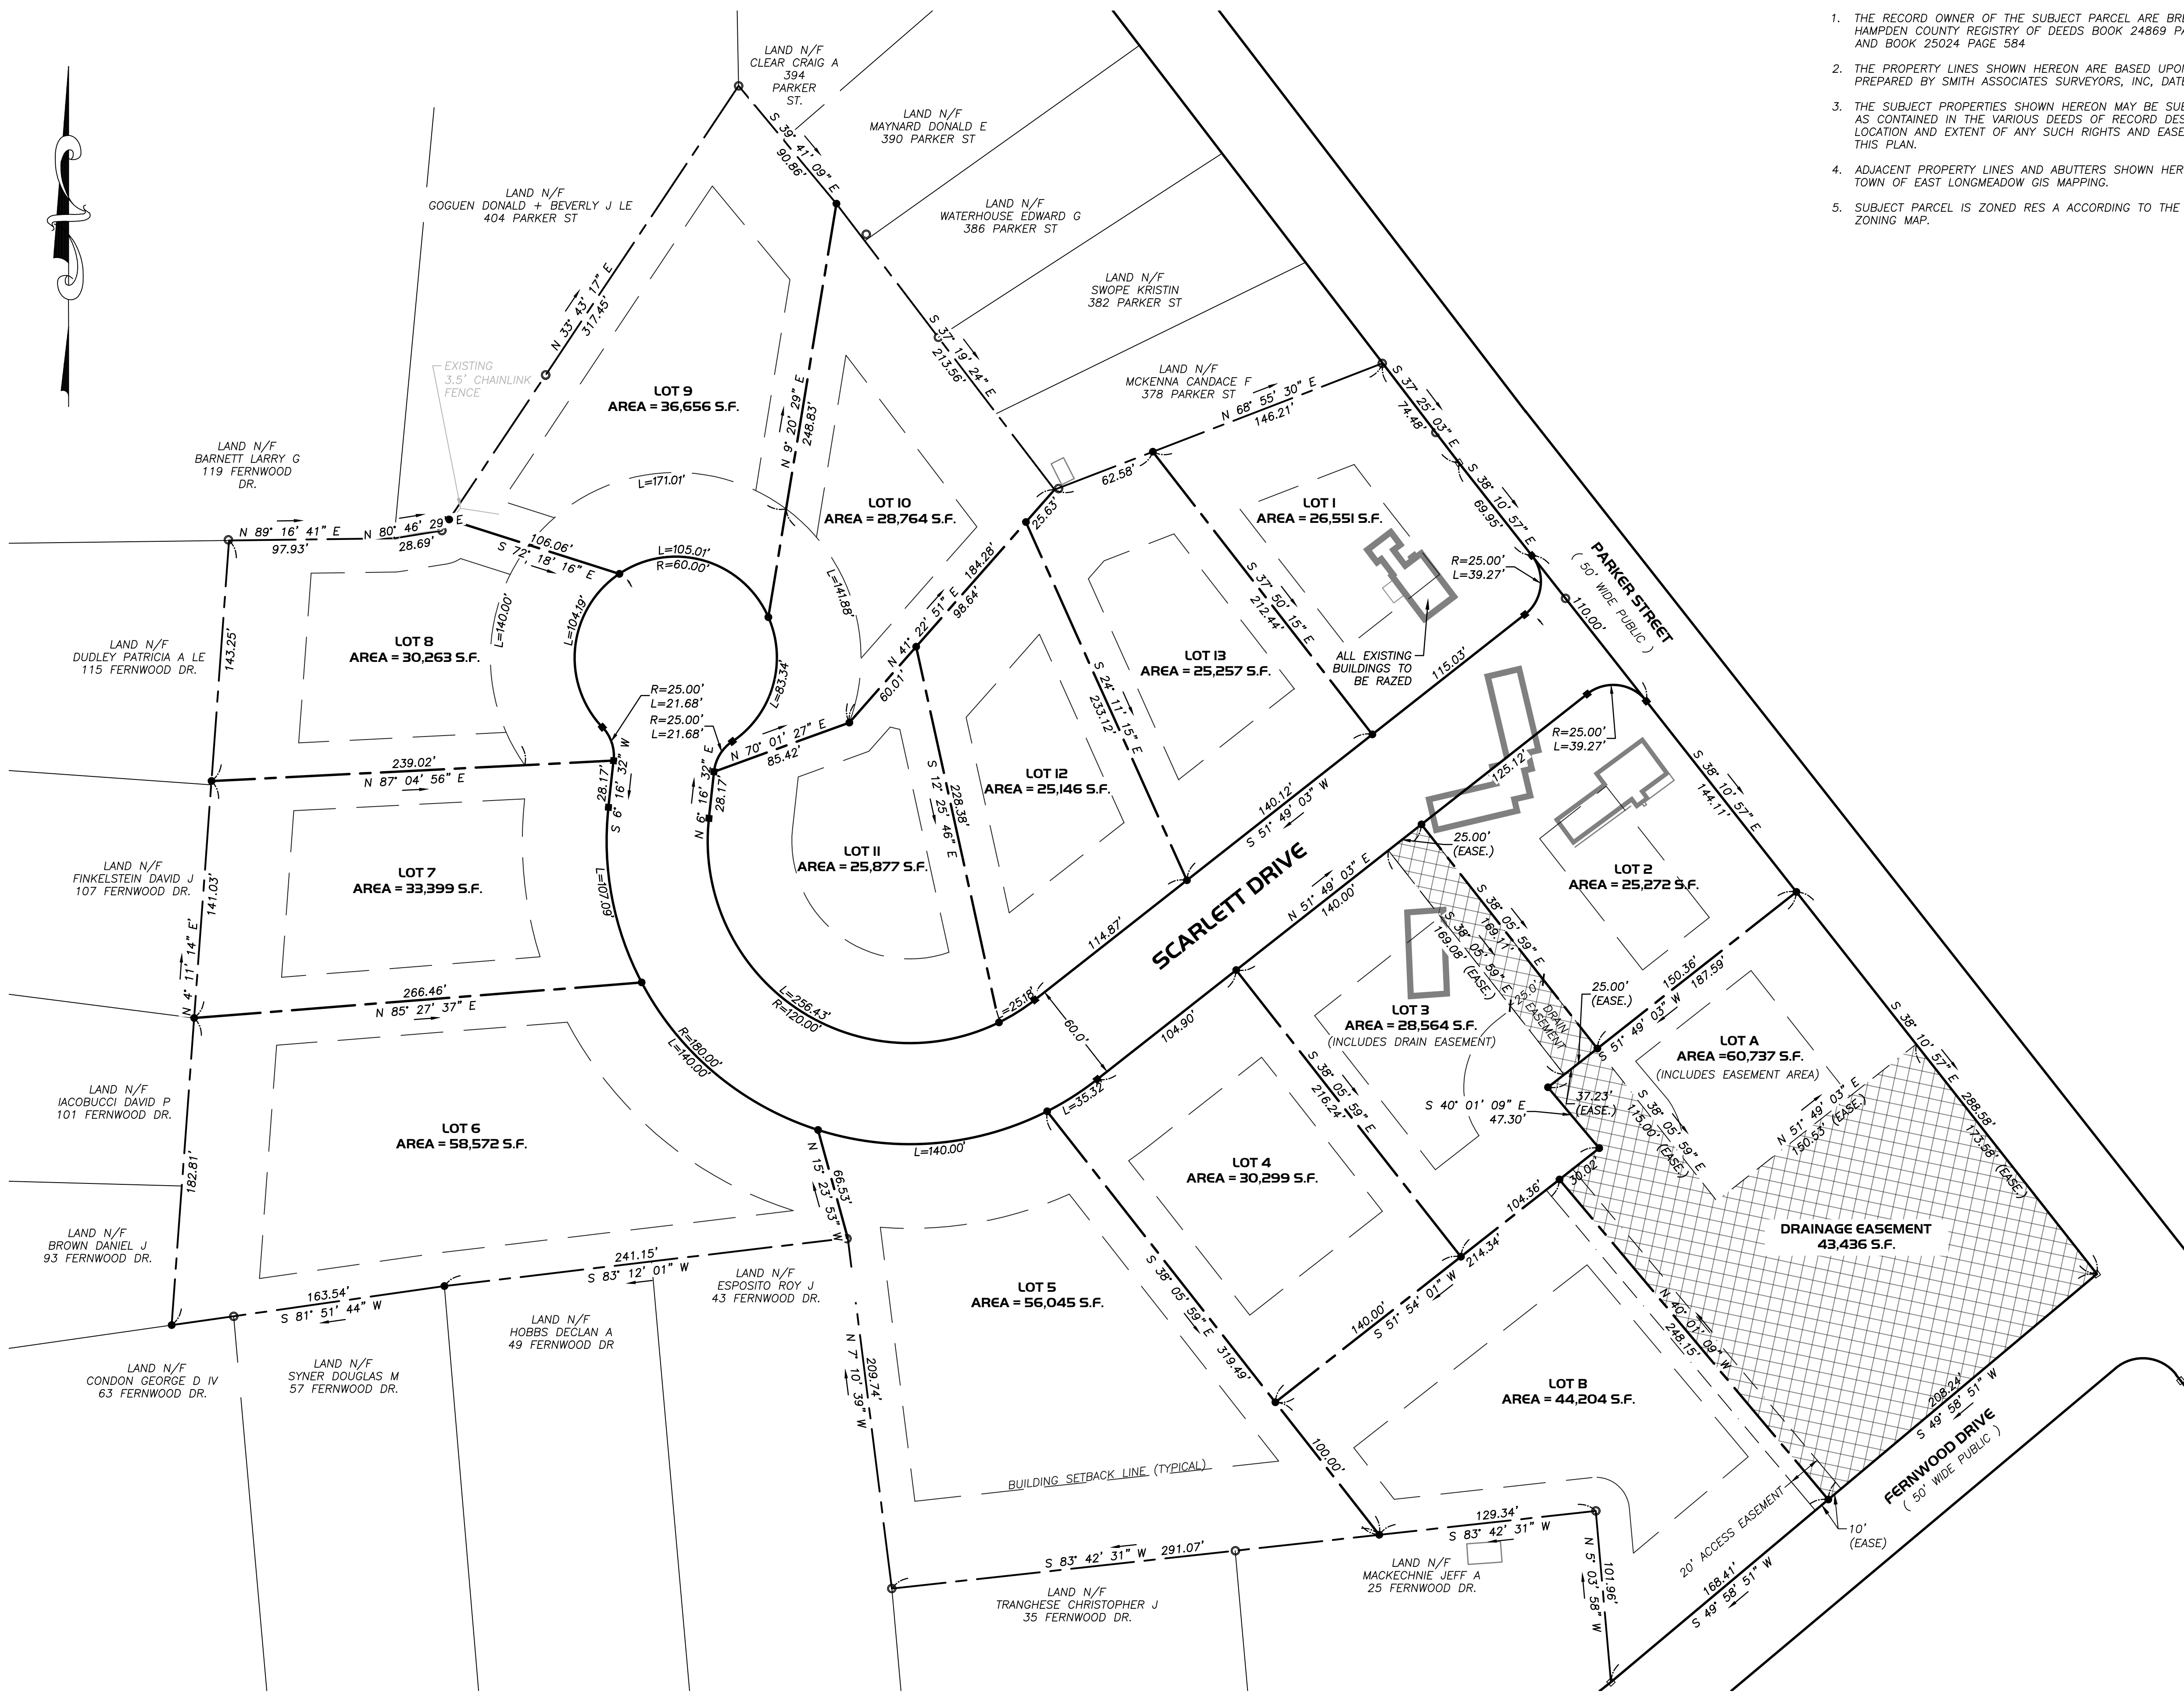

SYMBOL & LINE LEGEND


- IRON PIPE FOUND
- CONCRETE BOUND FOUND
- ▲ COMPUTED POINT
- IRON PIPE TO BE SET
- CONCRETE BOUND TO BE SET

Owner
BRETТА CONSTRUCTION LLC

Definitive Subdivision Plan
"OAKWOOD ESTATES"
Scarlett Drive East Longmeadow, MA


Surveyed and Mapped for
BRETТА CONSTRUCTION LLC
32 Eastwood Drive
Wilbraham, MA

November 17, 2023 Scale: 1"=50'



P-1

I hereby certify that no notice of appeal was received during the twenty (20) days next after receipt and recording of notice from the planning board of the approval of this plan		East Longmeadow Planning Board	
		No.	Date
Town Clerk - East Longmeadow		Date	



WE HAVE CONFORMED WITH THE RULES AND REGULATIONS OF THE REGISTRY OF DEEDS IN PREPARING THIS PLAN

a f
PROFESSIONAL LAND SURVEYOR


















































RLA Project Number: 230113

DATE: 11-17-2023

SCALE: 1" = 50'

SMITH ASSOCIATES
SURVEYORS, INC.

46 B BALDWIN STREET - EAST LONGMEADOW, MA 01028 - P: (413) 525-8801 F: (413) 525-8841
SMITHASSOCIATESURVEYORS@HOTMAIL.COM WWW.SMITHASSOCIATESURVEYORS.COM

SYMBOL & LINE LEGEND	
	IRON PIPE FOUND
	IRON PIPE TO BE SET
	CONCRETE BOUND FOUND
	CONCRETE BOUND TO BE SET
	COMPUTED POINT
	EXISTING SIGN
	EXISTING MAILBOX
	EXISTING MONITORING WELL
	EXISTING LIGHT POLE
	UTILITY POLE
	GUY ANCHOR
	EXISTING ELECTRIC MANHOLE
	EXISTING TELEPHONE MANHOLE
	EXISTING CABLE TV BOX
	EXISTING WELL LOCATION
	EXISTING WATER VALVE
	EXISTING WATER SHUT-OFF
	EXISTING HYDRANT
	PROPOSED WATER VALVE
	PROPOSED HYDRANT
	EXISTING GAS VALVE
	EXISTING SANITARY SEWER MANHOLE
	EXISTING CATCH BASIN
	EXISTING DRAIN MANHOLE
	PROPOSED CATCH BASIN
	PROPOSED MANHOLE
	SOIL BORING LOCATION
	TEST PIT LOCATION
	PERC TEST LOCATION
	WETLAND FLAG LOCATION
	M.A.H.W. FLAG LOCATION
	EXISTING STONE WALL
	TREE LINE
	EXISTING SPOT GRADE
	EXISTING CONTOUR
	PROPOSED SPOT GRADE
	PROPOSED CONTOUR
	EDGE OF WETLAND
	FENCE LINE
	GUARDRAIL
	EXISTING OVERHEAD WIRES
	EXISTING UNDERGROUND ELECTRIC
	EXISTING TELEPHONE LINE
	EXISTING GAS LINE
	EXISTING WATER LINE
	EXISTING STORM DRAIN
	EXISTING SANITARY SEWER
	LIMIT OF WORK LINE
	SILT FENCE LINE

ABBREVIATIONS	
A.F.F.	– ABOVE FINISHED FLOOR
A.F.S.	– ABOVE FINISHED SLAB
APPROX.	– APPROXIMATE
A.T.F.	– ABOVE TOP OF FOUNDATION
BLDG.	– BUILDING
BLK.	– BLOCK
BOT.	– BOTTOM
B.O.W.	– BOTTOM OF WALL
BRG.	– BEARING
CB.	– CATCH BASIN
CL	– CENTERLINE
C.I.	– CAST IRON
CLR.	– CLEAR
CONC.	– CONCRETE
CONT.	– CONTINUOUS
CONTR.	– CONTRACTOR
DBL.	– DOUBLE
DET.	– DETAIL
D.I.	– DUCTILE IRON
DIA.	– DIAMETER
DIM.	– DIMENSION
DT'L.	– DETAIL
DWG.	– DRAWING
EA.	– EACH
ELEC.	– ELECTRIC
ELEV.	– ELEVATION
EXIST.	– EXISTING
EXT.	– EXTERIOR
FFE	– FINISH FLOOR ELEVATION
FIN.	– FINISH
FLR.	– FLOOR
FOUND.	– FOUNDATION
FT.	– FOOT OR FEET
INSTL.	– INSTALLED
LT.	– LIGHT
MAX.	– MAXIMUM
M.A.H.W.	– MEAN ANNUAL HIGH WATER
MH.	– MANHOLE
MIN.	– MINIMUM
MISC.	– MISCELLANEOUS
N.T.S.	– NOT TO SCALE
O.A.	– OVERALL
O.C.	– ON CENTER
PCB	– PROPOSED CATCH BASIN
PDMH	– PROPOSED DRAIN MANHOLE
PFES	– PROP. FLARED END SECTION
POCS	– PROP. OUTLET CONTROL STRUCT.
PROP.	– PROPOSED
PSMH	– PROP. SANITARY SEWER MANHOLE
PWQU	– PROP. WATER QUALITY UNIT
P.S.I.	– POUNDS PER SQUARE INCH
REINF.	– REINFORCING
R.H.	– RIGHT HAND
SHT.	– SHEET
SPEC.	– SPECIAL OR SPECIFICATIONS
SQ.	– SQUARE
ST.	– STEEL
STA.	– STATION
T.O.F.	– TOP OF FOUNDATION
T.O.W.	– TOP OF WALL
T.S.	– TOP OF STEEL
TYP.	– TYPICAL
W/	– WITH
WTR.	– WATER
W.W.M.	– WELDED WIRE MESH

EROSION & SEDIMENT CONTROL NOTES

MANAGEMENT STRATEGIES

- CONSTRUCTION TRAFFIC SHALL BE LIMITED TO THE CONSTRUCTION ENTRANCE.
- CONSTRUCTION SEQUENCE SHALL BE PHASED TO AVOID LEAVING LARGE AREAS EXPOSED FOR LONG PERIODS OF TIME.
- TEMPORARY SEED AND MULCH SHALL BE APPLIED IMMEDIATELY FOLLOWING ROUGH GRADING.
- SEDIMENTATION CONTROL MEASURES SHALL BE INSPECTED CONTINUOUSLY, ESPECIALLY FOLLOWING STORM EVENTS TO LOCATE FAILING CONTROL MEASURES AND CONDUCT ROUTINE MAINTENANCE OPERATIONS.
- THE CONSTRUCTION SUPERINTENDENT SHALL INFORM ALL ON-SITE WORKERS OF THE SEDIMENTATION CONTROL PROGRAM.

VEGETATIVE CONTROL PRACTICES

- TOPSOIL STOCKPILING: TOPSOIL SHALL BE STRIPPED FROM AREAS TO BE DISTURBED AND STOCKPILED FOR LATER USE. STOCKPILE LOCATION SHALL BE APPROVED BY THE OWNER AND ENGINEER AND BE WITHIN LIMIT OF WORK.
- TEMPORARY SEEDING: THE TEMPORARY SEDIMENT BASIN, TOPSOIL STOCKPILE AND ROUGH GRADED AREAS SHALL BE SEEDED WITH WINTER RYE AT A RATE OF 30 LBS. PER ACRE ANY SOILS THAT ARE LEFT EXPOSED AND UNDISTURBED FOR MORE THAN 30 DAYS SHALL BE TEMPORARILY SEEDED.
 - SITE PREPARATION
 - COMPLETE ALL ROUGH GRADING ACTIVITIES
 - REMOVE ALL ROCKS AND DEBRIS LARGER THAN 3" IN DIAMETER FROM AREAS TO BE TEMPORARILY SEEDED. –EVENLY APPLY LIME TO ACHIEVE A PH VALUE OF 6.0.
 - EVENLY APPLY 14 LBS. OF 5–10–10 ANALYSIS FERTILIZER TO A DEPTH OF 4" USING SUITABLE EQUIPMENT.
 - SEEDBED IS TO BE LEFT IN FIRM AND SMOOTH CONDITION.
 - THE LAST TILLAGE OPERATION SHALL BE PERFORMED ACROSS THE SLOPE.
 - ESTABLISHMENT
 - EVENLY APPLY SEED IN ACCORDANCE WITH THE SPECIES AND RATE INDICATED ABOVE BY MEANS OF BROADCASTING OR HYDROSEEDING.
 - UNLESS HYDROSEEDED, COVER SEED WITH 1/4" TO 1/2" OF TOPSOIL
 - APPLY MULCH OR EROSION CONTROL BLANKET IMMEDIATELY FOLLOWING SEEDING.
 - VERIFY SEEDING DATES WITH ENGINEER/LANDSCAPE ARCHITECT. IF ENGINEER/LANDSCAPE ARCHITECT DETERMINES THAT SEED CANNOT BE APPLIED DUE TO CLIMATE, TOPSOIL SHALL NOT BE SPREAD AND MULCHING SHALL BE APPLIED TO THE EXPOSED SURFACE TO STABILIZE SOILS UNTIL THE NEXT RECOMMENDED SEEDING PERIOD.
 - PERMANENT SEEDING SHALL BE APPLIED BETWEEN APRIL 15 AND SEPTEMBER 30. TEMPORARY SEEDING SHALL BE APPLIED TO ALL DISTURBED AREAS OUTSIDE THIS TIME FRAME, UPON APPROVAL BY THE ENGINEER/LANDSCAPE ARCHITECT.
 - MAINTENANCE
 - ALL SEEDED/MULCHED AREAS SHALL BE INSPECTED REGULARLY TO SEE THAT A GOOD STAND IS MAINTAINED. AREAS SHALL BE REPAIRED AS NECESSARY.

NONSTRUCTURAL CONTROL PRACTICES

- SCARIFICATION: EXPOSED SLOPES EXCEEDING 4:1 SHALL BE SCARIFIED AT RIGHT ANGLES TO THE SLOPE. PROVIDE PERIODIC UPGRADING OF SERRATIONS DURING EXPOSED PERIOD UNTIL VEGETATION IS ESTABLISHED. PROVIDE VEGETATIVE COVER AS SOON AS POSSIBLE.
- STRAW MULCH: STRAW MULCH SHALL BE APPLIED IN CONJUNCTION WITH TEMPORARY/PERMANENT SEEDING AND TO GRADED AREAS WHICH REMAIN EXPOSED OUTSIDE OF RECOMMENDED SEEDING DATES. MULCH SHALL BE APPLIED AT 90 LBS. PER 1000 S.F. CONTRACTOR SHALL PERIODICALLY INSPECT AND REAPPLY AS NECESSARY, PARTICULARLY FOLLOWING SIGNIFICANT STORM EVENTS.
- TOPSOIL: DISTURBED AREAS SHALL BE TOPSOILED PRIOR TO SEED APPLICATION. APPLICATION STANDARDS:
 - REMOVE ALL ROCKS AND DEBRIS OVER 1"–1 1/2" IN DIAMETER.
 - SCARIFY SURFACE PRIOR TO SEED APPLICATION.
 - APPLY 6" DEPTH OF TOPSOIL.
- SILT FENCE: SILT FENCE SHALL BE INSTALLED AROUND THE PERIMETER OF THE SITE, AT CULVERT OUTLET LOCATIONS, OR AS INDICATED ON THE DRAWINGS. SILT FENCE SHALL BE INSPECTED AND REPAIRED ROUTINELY, ESPECIALLY FOLLOWING STORM EVENTS UNTIL THE SITE HAS BEEN STABILIZED (COVER > 70%) BY VEGETATION.

STRUCTURAL CONTROL PRACTICES

- RIP–RAP OUTLET PROTECTION: RIP–RAP SHALL BE PROVIDED AT ALL PIPE OUTLETS. MATERIAL SHALL BE HARD, DURABLE FIELD OR QUARRY STONE WHICH IS ANGULAR AND RESISTS BREAKING DOWN WHEN EXPOSED TO WATER OR WEATHERING.
- CONSTRUCTION ENTRANCE: CONSTRUCTION ENTRANCE SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE DRAWINGS.
- DUST CONTROL: A WATER TRUCK SHOULD BE LOCATED ON-SITE FOR DUST CONTROL WHILE WORK IS PROCEEDING. MAINTENANCE SEDIMENTATION CONTROL MEASURES SHALL BE CHECKED WEEKLY AND AFTER EACH SIGNIFICANT RAINFALL EVENT. THE FOLLOWING ITEMS SHALL BE CHECKED IN PARTICULAR:
 - RIP–RAP OUTLET PROTECTION SHALL BE CHECKED REGULARLY FOR SEDIMENT ACCUMULATION. IF SIGNIFICANT AMOUNTS OF SEDIMENT ACCUMULATE, RIP–RAP SHALL BE REMOVED AND REPLACED.
 - SILT FENCING SHALL BE INSPECTED REGULARLY FOR UNDERMINING AND DETERIORATION. REMOVE SEDIMENT FROM BEHIND FENCE WHEN IT BECOMES 6 INCHES DEEP.
 - SEEDED/MULCHED AREAS SHALL BE INSPECTED REGULARLY TO SEE THAT A GOOD STAND IS MAINTAINED. AREAS SHALL BE REPAIRED AS NECESSARY.

SILT FENCE INSTALLATION NOTES

- THIS SEDIMENT BARRIER UTILIZES MIRAFI ENVROFENCE (100X) OR EQUAL. IT IS DESIGNED FOR SITUATIONS IN WHICH ONLY SHEET OR OVERLAND FLOWS ARE EXPECTED.
- THE HEIGHT OF THE BARRIER SHALL NOT EXCEED 36 INCHES (HIGHER BARRIERS MAY IMPOUND VOLUMES OF WATER SUFFICIENT TO CAUSE FAILURE OF THE STRUCTURE). IDEALLY THE FILTER FENCE SHALL BE PLACED 10 FEET AWAY FROM THE TOE OF SLOPE.
- WHEN JOINTS ARE NECESSARY, FILTER FABRICS SHALL BE SPLICED TOGETHER ONLY AT A SUPPORT STAKES WITH A MINIMUM 6-INCH OVERLAP, AND SECURELY SEALED. SEE MANUFACTURER'S RECOMMENDATION.
- STAKES SHALL BE SPACED A MAXIMUM OF 10 FEET APART AT THE BARRIER LOCATION AND DRIVEN SECURELY INTO THE GROUND (MINIMUM OF 12 INCHES). IN APPLICATIONS WHERE HEAVY FLOWS ARE EXPECTED SUCH AS IN-STREAM INSTALLATIONS STAKE SPACING SHALL BE PER MANUFACTURER'S RECOMMENDATIONS AND/OR THE ENGINEERS RECOMMENDATIONS.
- A TRENCH SHALL BE EXCAVATED APPROXIMATELY 6 INCHES WIDE AND 6 INCHES DEEP ALONG THE LINE OF STAKES AND UPSLOPE FROM THE BARRIER IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- THE PRE ASSEMBLED SILT FENCE SYSTEM SHALL BE UNROLLED, POSITION THE STAKES ON THE DOWNHILL SIDE OF THE TRENCH AND HAMMER THE STAKES AT LEAST 12 INCHES INTO THE GROUND.
- THE BOTTOM SIX (6) INCHES OF THE FABRIC SHALL BE LAID INTO THE TRENCH TO PREVENT UNDERMINING BY STORM WATER RUNOFF.
- BACKFILL THE TRENCH OVER THE FILTER FABRIC AND COMPACT SUFFICIENTLY TO PREVENT THE RUNOFF FROM ERODING THE BACKFILL.
- THE FABRIC SHALL NOT EXTEND MORE THAN 36 INCHES ABOVE THE ORIGINAL GROUND SURFACE. FILTER FABRIC SHALL NOT BE STAPLED TO EXISTING TREES OR SUPPORTS OTHER THAN THE STANDARD STAKES.
- INSTALLED SILT FENCE BARRIERS SHALL BE MAINTAINED ON A REGULAR SCHEDULE WHICH MAY BE PRESCRIBED BY THE LOCAL, STATE OF FEDERAL REGULATORY AUTHORITY; BUT, AT MINIMUM SHALL BE CHECKED WEEKLY AS WELL AS AFTER EACH STORM EVENT. MAINTENANCE SHALL CONSIST OF AN INSPECTION OF THE ENTIRE LENGTH OF THE BARRIER TO DETERMINE IF IT IS FUNCTIONING AS INTENDED. ALL BREAKS, DETACHED FABRIC, SLUMPED FABRIC, CLOGGED FABRIC, AND UNDERMINED AREAS SHALL BE FIXED THE DAY THAT THEY ARE DISCOVERED.
- WHEN A MAXIMUM OF SIX (6) INCHES OF SEDIMENT HAS ACCUMULATED BEHIND THE SILT FENCE THIS SEDIMENT SHALL BE REMOVED AND THE FENCE SHALL BE INSPECTED FOR TEARS, CLOGGING OF BREAKS. ALL DEFICIENCIES SHALL BE CORRECTED IMMEDIATELY EITHER BY REPAIR OF REPLACEMENT OF THE SILT FENCE BARRIER AND/OR STAKES AS NEEDED.
- SILT FENCE BARRIERS SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFUL PURPOSE, BUT NOT BEFORE THE UPSLOPE AREA HAS BEEN CLEANED OF SILT AND PERMANENTLY STABILIZED.

HAY BALE INSTALLATION & MAINTENANCE (AS REQ'D)

- HAY BALES SHALL BE PLACED IN A SINGLE ROW, LENGTHWISE ON THE CONTOUR, WITH ENDS OF ADJACENT BALES TIGHTLY ABUTTING ONE ANOTHER.
- ALL BALES SHALL BE EITHER WIRE BOUND OR STRING TIES. BALES SHALL BE INSTALLED SO THAT BINDINGS ARE ORIENTED AROUND THE SIDES RATHER THAN ALONG THE TOPS AND BOTTOMS OF THE BALES TO PREVENT DETERIORATION OF THE BINDINGS.
- THE BARRIER SHALL BE ENTRENCHED AND BACKFILLED. A TRENCH SHALL BE EXCAVATED THE WIDTH OF A BALE AND THE LENGTH OF THE PROPOSED BARRIER TO A MINIMUM DEPTH OF FOUR (4) INCHES AND A MAXIMUM DEPTH OF SIX (6) INCHES. AFTER THE BALES ARE STAKED AND CHINKED, THE EXCAVATED SOIL SHALL BE BACKFILLED AGAINST THE BARRIER. BACKFILL SOIL SHALL CONFORM TO THE GROUND LEVEL ON THE DOWNHILL SIDE AND SHALL BE BUILT UP TO FOUR (4) INCHES AGAINST THE UPHILL SIDE OF THE BARRIER.
- EACH BALE SHALL BE SECURELY ANCHORED BY AT LEAST TWO (2) STAKES OR REBARS DRIVEN THROUGH THE BALE. THE FIRST STAKE IN EACH BALE SHALL BE DRIVEN TOWARD THE PREVIOUSLY LAID BALE TO FORCE THE BALES TOGETHER. STAKES OR REBARS SHALL BE DRIVEN DEEP ENOUGH INTO THE GROUND TO SECURELY ANCHOR THE BALES.
- THE GAPS BETWEEN BALES SHALL BE CHINKED (FILLED BY WEDGING) WITH STRAW TO PREVENT WATER FROM ESCAPING BETWEEN THE BALES. (LOOSE STRAW SCATTERED OVER THE AREA IMMEDIATELY UPHILL FROM A STRAW BALE BARRIER TENDS TO INCREASE BARRIER EFFICIENCY.)
- HAY BALES GENERALLY DETERIORATE IN 2–6 MONTHS AND THUS NEED REPLACEMENT.
- INSPECTION SHALL BE FREQUENT AND REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.
- BALE BARRIERS SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFULNESS, BUT NOT BEFORE THE UPSLOPE AREAS HAVE BEEN PERMANENTLY STABILIZED.

SITE PREP


- CONTRACTOR SHALL BE RESPONSIBLE FOR ALL RELOCATION, INCLUDING BUT NOT LIMITED TO, ALL UTILITIES, STORM DRAINAGE, SIGNS, TRAFFIC SIGNALS & POLES, ETC. AS REQUIRED. ALL WORK SHALL BE IN ACCORDANCE WITH GOVERNING AUTHORITIES SPECIFICATIONS AND SHALL BE APPROVED BY SUCH.
- CONTRACTOR SHALL ERECT AND MAINTAIN SAFETY BARRICADES AND POST PROPER NOTICES PRIOR TO THE COMMENCEMENT OF WORK.
- CONTRACTOR SHALL PROTECT EXISTING SITE IMPROVEMENTS, APPURTENANCES, AND LANDSCAPING TO REMAIN.
- CONTRACTOR SHALL MAINTAIN EXISTING UTILITIES TO REMAIN IN SERVICE AND PROTECT THEM FROM DAMAGE DURING DEMOLITION OPERATIONS.
- DO NOT DAMAGE EXISTING UTILITIES TO REMAIN WITHIN PROJECT AREA. ALL DAMAGE TO EXISTING UTILITIES TO REMAIN SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE TO THE SATISFACTION OF THE UTILITY OWNER.
- THERE SHALL BE NO BURNING OF DEMOLISHED MATERIAL ALLOWED ON SITE.
- CONTRACTOR SHALL COORDINATE WITH OWNER FOR ANY ITEMS TO BE TURNED OVER TO OWNER.
- DEMOLISH AND REMOVE ALL PAVEMENT, SLABS, FOOTINGS, SUBSURFACE ELEMENTS, MISCELLANEOUS DEBRIS, ETC. WITHIN PROPERTY LINES UNLESS NOTED OTHERWISE.
- CONTRACTOR IS RESPONSIBLE FOR CONTROLLING DUST SO THAT DUST DOES NOT CREATE A NUISANCE ON ADJACENT ROADS OR PROPERTIES. SITE CONTRACTOR SHALL BE RESPONSIBLE FOR STREET SWEEPING AND CATCH BASIN CLEANING AFTER EACH PHASE OF CONSTRUCTION AND AS NEEDED IS DETERMINED BY THE ENGINEER.
- CONTRACTOR SHALL REMOVE AND DISPOSE OF ANY ABANDONED SUBSURFACE SOIL ABSORPTION SYSTEM (SAS) AND MISCELLANEOUS DEBRIS.
- NO ACTIVITY OTHER THAN NORMAL MAINTENANCE SHALL OCCUR OUTSIDE OF LIMIT OF WORK LINES AS SHOWN ON PLAN WITHOUT THE APPROVAL OF THE ENGINEER.
- THE CONTRACTOR SHALL NOTIFY DIG SAFE @ 1-888-344-7233 PRIOR TO COMMENCEMENT OF ANY DEMOLITION/CONSTRUCTION ACTIVITY.

LANDSCAPE NOTES

- THE CONTRACTOR SHALL VERIFY FINAL SELECTION OF PLANT MATERIALS WITH THE LANDSCAPE ARCHITECT AND OWNER PRIOR TO INSTALLATION.
- NO PLANT MATERIAL WILL BE ACCEPTED WHICH DISPLAYS MAJOR IRREGULARITIES OR DAMAGE. THE OWNER/LANDSCAPE ARCHITECT RETAINS THE RIGHT TO REJECT ANY PLANT MATERIAL DEEMED UNFIT.
- WARRANTEE: FOR A PERIOD OF TWO GROWING SEASONS FROM THE DATE THAT THE WORK UNDER THIS CONTRACT IS CERTIFIED AS SUBSTANTIALLY COMPLETE, THE CONTRACTOR SHALL: 1) WARRANTEE ALL PLANTS AND SEEDED AREAS UNDER THIS CONTRACT; 2)REMOVE AND REPLACE DURING THIS GUARANTEE PERIOD PLANTS WHICH DIE OR ARE IN POOR CONDITION AS DETERMINED BY THE OWNER; 3) REPLANT WITH STOCK OF SAME SIZE AND QUALITY AS ORIGINALLY SPECIFIED; 4) GUY AND MAINTAIN AS SPECIFIED HEREIN AT NO ADDITIONAL COST TO THE OWNER.
- ALL NEW LAWN AREAS SHALL RECEIVE A MINIMUM OF 4 INCHES TOPSOIL OF THE PROPER pH AND ORGANIC CONTENT SUITABLE FOR THE HEALTHY GROWTH OF LAWNS. THESE AREAS SHALL BE SEEDED WITH A FINE BLADE LAWN GRASS SEED OR SODDED. ADDITIONAL OFF-SITE TOPSOIL MAY BE REQUIRED.
- ALL AREAS TO BE MULCHED SHALL RECEIVE 4 INCHES MINIMUM 100% SHREDDED BARK MULCH WITHIN 48 HOURS OF PLANTING UNLESS OTHERWISE NOTED IN PLANTING DETAILS.
- ALL TREE AND SHRUB PITS SHALL BE AT LEAST 2 FEET WIDER AND 1 FOOT DEEPER THAN THE TREE OR SHRUB ROOT BALL TO BE PLANTED IN IT. BACKFILL SHALL BE HIGH QUALITY LOAM OF THE PROPER pH AND ORGANIC CONTENT SUITABLE FOR THE HEALTHY GROWTH OF PLANT MATERIALS.
- ALL PLANTS SHALL BE NURSERY GROWN AND CONFORM TO THE LATEST EDITION OF "ANSI Z60.1, AMERICAN STANDARD FOR NURSERY STOCK".
- EACH PLANT TO BE FREE FROM DISEASE, INSECT INFESTATION, MECHANICAL INJURIES, AND IN ALL RESPECTS BE SUITABLE FOR FIELD PLANTING.
- EACH PLANT TO BE IN THE TOP OF ITS SIZE CLASS AFTER SHEARING AND PRUNING.
- ADJACENT TO THE TOP OF ANY WALLS OVER 36" A FENCE OR WALL SHALL BE CONSTRUCTED PER PLAN THAT MEETS LOCAL BUILDING CODE AND ALL OTHER APPLICABLE STATE AND FEDERAL LAWS.
- SEE DETAIL SHEETS FOR ADDITIONAL DETAILS & SPECIFICATIONS.
- SHOULD GC OR ANY SUBCONTRACTOR ENCOUNTER A DISCREPANCE/CONFLICT IN THE PLAN AN THE ACTUAL LOCATION OF A SITE FEATURE, THE CONTRACTOR SHALL CONTACT THE LANDSCAPE ARCHITECT/ENGINEER AND OWNER IMMEDIATELY.
- ALL AREAS DISTURBED DURING CONSTRUCTION NOT DESIGNATED TO RECEIVE OTHER TREATMENT SHALL BE LOAMED TO A MINIMUM DEPTH OF 4" AND SEEDED IN ACCORDANCE WITH THE FOLLOWING:
 - INCORPORATE GROUND LIMESTONE INTO ALL AREAS TO BE SEEDED AT A RATE OF 50 LBS/1,000 S.F.
 - APPLY 10–6–4 FERTILIZER TO ALL AREAS TO BE SEEDED AT A RATE OF 2 LBS/1,000 S.F.
 - THOROUGHLY INCORPORATE LIME AND FERTILIZER INTO SEED BED TO DEPTH OF 3" BY DISCING OR OTHER APPROVED METHOD.
 - SEED WITH THE FOLLOWING MIXTURE, APPLIED AT A RATE OF 10 LBS/1,000 S.F. SEED MIX:

NAME OF SEED	% BY WEIGHT IN MIXTURE	MIN. % PURITY	MIN. GERMINATION
POS PRETENSES "BARON" BARON BLUEGRASS	50	90	75
FESTUCA RUBRA "PENNLAWN" PENNLAWN FESCUE	25	95	85
LOLIUM PERENNE "PENNFINE" PENNFINE	25	98	95

E. MULCH ALL SEEDED AREAS WITH STRAW AT A RATE OF 5 LBS/1,000 S.F.UNLESS HYDROSEEDING WAS USED.
F. ALL SLOPES OF 3:1 OR GREATER AFTER BEING LOAMED, SEEDED AND MULCHED IN ACCORDANCE WITH THE ABOVE SHALL BE SECURED WITH EROSION CONTROL BLANKETS (NO. AMERICAN GREEN S150 OR EQUAL). OVERLAP ALL NETTING JOINTS A MINIMUM OF 6" AND SECURE WITH DOUBLE ROW OF STAPLES.

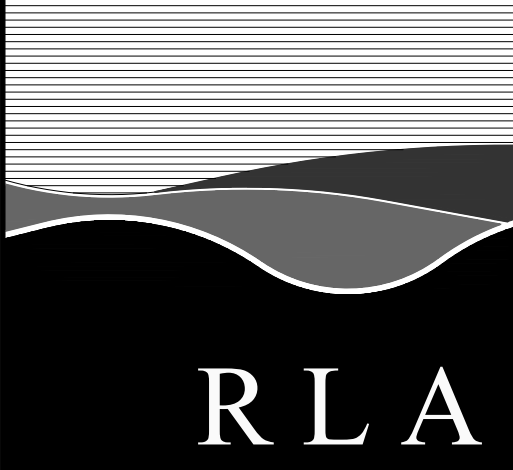

R LEVESQUE ASSOCIATES INC.


Landscape Architects
Civil Engineers - Land Surveyors
Environmental Consultants

ph: 413.568.0985 fax: 413.568.0986

40 School Street
Westfield, MA 01085
rlaland.com

NOTES, SYMBOL & LINE
LEGEND AND ABBREVIATIONS

362-368 PARKER STREET
PARCEL ID: 75-10-1A,75-11-0,63-26-0 and 62-31-A+B
EAST LONGMEADOW MA.

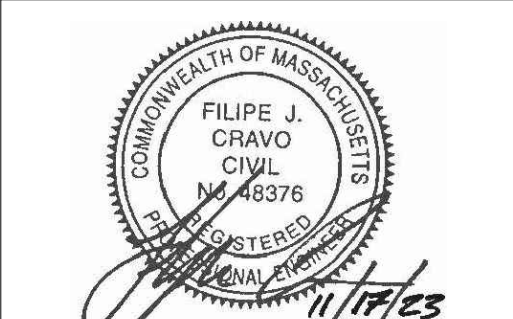

PREPARED FOR:

Bretta Construction LLC

32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023

REVISIONS:	DATE:

DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF THIS DOCUMENT IS A VIOLATION OF MASSACHUSETTS STATE LAW

SCALE: As Noted

RLA PROJ. NUMBER: 230113

DRAWING#	REV.
C-1	-

S:\Projects\2023\230113 - Bretta -562 & 368 Parker Street - East Longmeadow\05 Civil\3D\230113 - Definitive.dwg

GENERAL CONSTRUCTION NOTES

1. PRIOR TO BEGINNING CONSTRUCTION, THE CONTRACTOR OR HIS AUTHORIZED REPRESENTATIVE SHALL CONVENE A PRE-CONSTRUCTION CONFERENCE BETWEEN THE CITY/TOWN REPRESENTATIVES, CONSULTING ENGINEER/LANDSCAPE ARCHITECT, UTILITY COMPANY REPRESENTATIVES, AND ANY OTHER AFFECTED PARTIES.
2. THE OWNER, R LEVESQUE ASSOCIATES, INC. AND/OR THEIR REPRESENTATIVES, IN PREPARING THESE PLANS HAVE ATTEMPTED TO LOCATE ALL EXISTING UTILITIES IN THE PROJECT AREA. HOWEVER, THERE MAY BE UTILITIES THAT WERE NOT OR COULD NOT BE LOCATED. UNDERGROUND UTILITIES SHOWN ON THE PLANS ARE IN APPROXIMATE LOCATIONS ONLY. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATIONS AND ELEVATIONS OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK. THE CONTRACTOR SHALL CALL ALL APPROPRIATE UTILITY COMPANIES FOR LOCATIONS OF THEIR UTILITIES AT LEAST 48 HOURS BEFORE COMMENCING EXCAVATION. IN THE EVENT THAT A UTILITY IS SITUATED SUCH THAT CONSTRUCTION CANNOT PROCEED AS SHOWN ON THE PLANS, THE PROJECT ENGINEER/LANDSCAPE ARCHITECT AND OWNER SHALL BE NOTIFIED IMMEDIATELY.
3. THE SITE CONTRACTOR IS RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH OCCUR DUE TO HIS FAILURE TO LOCATE AND PRESERVE ANY AND ALL UTILITIES.
4. ALL FILL WORK REQUIRED TO BRING THE PROPOSED ROADWAY UP TO SUB-GRADE LEVEL SHALL CONFORM TO MHD SPECIFICATIONS SECTION 150.
5. CONSTRUCTION SHALL COMPLY WITH ALL APPLICABLE GOVERNING CODES AND BE CONSTRUCTED TO SAME.
6. ALL WORK IN THE CITY/TOWN RIGHT-OF-WAY AND EASEMENTS SHALL BE IN ACCORDANCE WITH THE CITY/TOWN SPECIFICATIONS AND MASSACHUSETTS DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, LATEST EDITION.
7. THE CONTRACTOR SHALL GIVE THE CITY/TOWN A MINIMUM OF 48 HOURS NOTICE BEFORE BEGINNING EACH PHASE OF CONSTRUCTION.
8. CONTRACTOR IS RESPONSIBLE FOR REPAIRS OF DAMAGE TO ANY EXISTING IMPROVEMENTS DURING CONSTRUCTION, SUCH AS, BUT NOT LIMITED TO, DRAINAGE, UTILITIES, PAVEMENT, STRIPING, CURB, ETC. REPAIRS SHALL BE EQUAL TO OR BETTER THAN EXISTING CONDITIONS.
9. ALL WORK SHALL BE PERFORMED IN CONFORMANCE WITH THE CONDITIONS OF APPROVAL OUTLINED IN ALL STATE AND LOCAL PERMITS. COPIES OF THE CONDITIONS ARE INCLUDED WITHIN THE PROJECTS TECHNICAL SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REVIEWING THIS INFORMATION PRIOR TO CONSTRUCTION AND CONFORMING TO THE CONDITIONS AS REQUIRED DURING CONSTRUCTION.
10. THE CONTRACTOR SHALL MAINTAIN THE JOB CLEAR OF TRASH AND DEBRIS. THE WORK AREAS ARE TO BE PICKED UP AT THE END OF EACH WORK DAY.
11. ANY TEMPORARY FACILITIES FOR THE STORAGE OR PROTECTION OF TOOLS, EQUIPMENT OR MATERIALS SHALL CONFORM TO LOCAL REGULATIONS AND SHALL BE THE GENERAL CONTRACTORS RESPONSIBILITY. THESE DOCUMENTS DO NOT INCLUDE THE NECESSARY COMPONENTS FOR CONSTRUCTION SAFETY. SAFETY, CARE OF ADJACENT PROPERTIES DURING CONSTRUCTION, AND COMPLIANCE WITH STATE AND FEDERAL REGULATIONS REGARDING SAFETY SHALL BE THE GENERAL CONTRACTORS RESPONSIBILITY.
12. THE GENERAL CONTRACTOR AND HIS SUBCONTRACTORS SHALL VISIT THE SITE AND BECOME FAMILIAR WITH ALL CONDITIONS PRIOR TO SUBMITTING HIS PROPOSAL. NO EXTRAS DUE TO UNFAMILIARITY WITH THE EXISTING SITE OR WORKING CONDITIONS WILL BE ALLOWED.
13. CONTRACTOR SHALL BE REQUIRED TO PERFORM FINAL CLEANUP CONSISTING OF CLEANING THE PROPOSED DRAINAGE AND SEWER SYSTEMS OF ALL DEBRIS PRIOR TO THE ACCEPTANCE BY THE OWNER. ADDITIONALLY, THE PROPOSED ROADWAY SHALL BE CLEANED AND SWEEPED BY THE CONTRACTOR PRIOR TO ACCEPTANCE.
14. ALL EXCAVATION SHALL COMPLY WITH OSHA'S LATEST STANDARDS. ALL REQUIREMENTS OF OSHA'S EXCAVATION STANDARDS SHALL BE PROVIDED BY THE CONTRACTOR INCLUDING, BUT NOT LIMITED TO, THE PROVISION FOR A COMPETENT PERSON ON SITE MANAGER AND ANY REQUIRED DOCUMENTATION THAT MAY REQUIRE CERTIFICATION BY A PROFESSIONAL ENGINEER. THE OWNER, THROUGH ITS ENGINEER, SHALL EXPRESSLY NOT PROVIDE ANY OF THE ABOVE REQUIREMENTS DESIGNATED BY OSHA'S EXCAVATION STANDARD.
15. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE COST OF LAYING OUT ALL ITEMS OF THE WORK BASED ON CERTAIN HORIZONTAL CONTROL AND BENCHMARK SUPPLIED BY THE SURVEYOR OF RECORD. ANY DISCREPANCIES SHALL BE IMMEDIATELY REPORTED TO THE ENGINEER.
16. THE CONTRACTOR SHALL PROVIDE ALL MATERIALS, LABOR, EQUIPMENT, PERMITS AND APPURTENANCES NECESSARY TO PROVIDE A COMPLETE PROJECT AS INDICATED ON THE PLANS AND IN THESE SPECIFICATIONS.
17. THE CONTRACTOR SHALL BE RESPONSIBLE FOR A THOROUGH SITE EXAMINATION IN ORDER TO PREPARE SITE FOR CONSTRUCTION.
18. ANY AND ALL DEMOLISHED TREES, STRUCTURES AND OTHER RUBBLE MATERIAL PERTAINING TO THIS PROJECT SHALL BE DISPOSED OF BY THE CONTRACTOR OFF-SITE AT HIS EXPENSE IN ACCORDANCE WITH ALL OF THE CITY/TOWN ORDINANCES AND ALL APPLICABLE STATE AND FEDERAL ENVIRONMENTAL REGULATIONS.
19. ALL PAVEMENT DISTURBED BY THE CONTRACTOR'S OPERATIONS SHALL BE REPLACED IN ACCORDANCE WITH THE SPECIFICATIONS AND AS SHOWN ON THE DRAWINGS.
20. ALL STREET EXCAVATIONS SHALL BE COMPLETELY CLOSED AT THE END OF EACH WORKING DAY BY BACKFILLING OR COVERING WITH STEEL PLATES.
21. ALL MATERIALS AND METHODS ARE TO COMPLY WITH THE CITY/TOWN DPW STANDARDS OR MASSACHUSETTS DEPARTMENT OF TRANSPORTATION (MASSDOT) (WHERE APPLICABLE), UNLESS OTHERWISE DIRECTED BY THE ENGINEER.
22. PERMITS WILL BE REQUIRED BY CONTRACTOR WHEN WORKING WITHIN OR OCCUPYING PUBLIC WAY. CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL REQUIRED WORK PERMITS AND MAINTAINING A COPY OF ALL PERMITS IN A THREE RING BINDER OR PROJECT BOOK AND ON-SITE AT ALL TIMES.
23. BACKFILL WILL BE PLACED IN SUCCESSIVE LAYERS NOT MORE THAN TWELVE INCHES IN THICKNESS AND SHALL BE COMPACTED TO 95% OF MAXIMUM DRY DENSITY DETERMINED BY STANDARD PROCTOR TEST (ASTM 698) FOR ALL APPLICABLE TYPES OF BACKFILL MATERIAL. NO FROZEN MATERIAL SHALL BE USED AS BACKFILL. IF, IN THE OPINION OF THE ENGINEER OR THE DPW, THE EXCAVATED MATERIAL IS UNSUITABLE, THE ENTIRE MATERIAL FOR BACKFILLING SHALL CONSIST OF APPROVED GRAVEL OR APPROVED BORROW, AS DIRECTED. AFTER THOROUGH TAMPING AROUND AND BENEATH THE UTILITY, A SIX-INCH LAYER OF BACKFILL WILL BE THOROUGHLY COMPACTED AS FOLLOWS: IF DRY, SHALL BE MOISTENED AND THEN COMPACTED WITH MECHANICAL TAMPERS OR BY HAND TAMPERS HAVING A TAMPING FACE NOT EXCEEDING 25 SQUARE INCHES IN AREA. THE FINAL TWELVE INCHES OF FILLING WILL, IN ALL CASES, CONSIST OF APPROVED GRAVEL THOROUGHLY TAMPED.
24. CONTRACTOR SHALL PROVIDE FIELD COMPACTION VERIFICATION UTILIZING ASTM D5195-02, STANDARD TEST METHOD FOR DENSITY OF SOIL & ROCK IN-PLACE AT DEPTHS BELOW THE SURFACE BY NUCLEAR METHODS.
25. CONTRACTOR SHALL PROVIDE FIELD COMPACTION RESULTS TO ENGINEER WITHIN 24-HOURS PRIOR TO PLACEMENT OF INFRASTRUCTURE OR BITUMINOUS BINDER.
26. ALL FILL TO BRING PROPOSED ROADWAY UP TO THE SUB-GRADE LEVEL SHALL EXTEND PAST THE EDGE OF THE RIGHT-OF-WAY AT A 2:1 SLOPE. THIS IS TO PROVIDE ADEQUATE SUPPORT FOR THE RIGHT-OF-WAY.

LAYOUT NOTES

1. ALL CONSTRUCTION IN CITY/TOWN RIGHT-OF-WAYS AND/OR EASEMENTS SHALL BE IN ACCORDANCE WITH THE CITY/TOWN STANDARD SPECIFICATIONS.
2. IN THE EVENT OF DISCREPANCIES BETWEEN LOCAL SPECIFICATIONS AND SITE SPECIFICATIONS, THE MORE STRINGENT REQUIREMENT SHALL GOVERN.
3. SITE CONTRACTOR SHALL PROTECT ALL BENCHMARKS AND PROPERTY MONUMENTATION AND SHALL REPLACE OR REPAIR, AT HIS OWN EXPENSE, BENCHMARKS AND MONUMENTATION DISTURBED DURING CONSTRUCTION.
4. ALL STRIPING, PAVEMENT MARKINGS, AND TRAFFIC SIGNAGE SHALL BE IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION, UNLESS OTHERWISE NOTED ON THE PLANS.
5. ALL WORK SHALL COMPLY WITH FEDERAL, STATE AND LOCAL CODES AND ORDINANCES INCLUDING BUT NOT LIMITED TO: AASHTO, OSHA, EPA, DEP, MASSDOT, ETC. THE GENERAL CONTRACTOR SHALL APPLY FOR ALL PERMITS AND SHALL PAY ALL PERMIT RELATED FEES. ALL NECESSARY PERMITS SHALL BE OBTAINED PRIOR TO THE START OF WORK.
6. ALL DIMENSIONS AND CONDITIONS SHOWN ON THE DRAWINGS ARE TO BE VERIFIED BY THE CONTRACTOR. IF FIELD CONDITIONS VARY SIGNIFICANTLY ENOUGH TO REQUIRE A CHANGE TO THE CONTRACT DOCUMENTS, THE PROJECT PROPONENT AND ENGINEER SHALL BE NOTIFIED IMMEDIATELY.
7. THE SITE/GENERAL CONTRACTOR AND SUBCONTRACTORS SHALL CONTACT THE OWNER AND ENGINEER SHOULD HE FIND ANY CONFLICT OR INCONSISTENCY BETWEEN THE WORK SHOWN ON THE DRAWINGS AND NORMAL ACCEPTED CONSTRUCTION PRACTICES, OR HE SHALL ASSUME RESPONSIBILITY FOR ALL CORRECTIONS.
8. ANY CORRECTIONS REQUIRED FOR REVISIONS TO THE CONTRACT DRAWINGS INITIATED BY THE GENERAL CONTRACTOR OR SUBCONTRACTORS WITHOUT PRIOR APPROVAL OF THE OWNER AND OR THE ENGINEER SHALL BE ACCOMPLISHED AT THE CONTRACTORS RISK.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL & LEGAL DISPOSAL OF ALL MATERIAL NECESSARY TO PREPARE THE SITE FOR THE NEW CONSTRUCTION AS SHOWN ON THE SITE DRAWINGS.
10. REPAIR DAMAGED CITY/TOWN ROADS AND CURBS IN ACCORDANCE WITH MASSDOT AND/OR THE CITY/TOWN REGULATIONS.
11. CONTRACTOR SHALL SAWCUT PAVEMENT EDGE WHERE PAVEMENT TO REMAIN IS ADJACENT TO PAVEMENT TO BE REMOVED.
12. CONTRACTOR SHALL PREPARE SITE AS NECESSARY FOR CONSTRUCTION SHOWN ON THE PLANS.

EARTHWORK NOTES

1. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANIES AT LEAST 72 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
2. ALL CUT OR FILL SLOPES SHALL BE 3:1 OR FLATTER UNLESS OTHERWISE NOTED.
3. STORM PIPE SHALL BE AS NOTED ON PLANS.
4. EXISTING DRAINAGE STRUCTURES TO BE INSPECTED AND REPAIRED AS NEEDED, AND EXISTING PIPES TO BE CLEANED OUT TO REMOVE ALL SILT AND DEBRIS.
5. EXISTING GRADE CONTOUR INTERVALS SHOWN AT 1 FOOT INTERVALS.
6. PROPOSED GRADE CONTOUR INTERVALS SHOWN AT 1 FOOT INTERVALS.
7. IF ANY EXISTING STRUCTURES TO REMAIN ARE DAMAGED DURING CONSTRUCTION IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO REPAIR AND/OR REPLACE THE EXISTING STRUCTURE AS NECESSARY TO RETURN IT TO EXISTING CONDITIONS OR BETTER.
8. ALL STORM PIPE ENTERING STRUCTURES SHALL BE SEALED TO ASSURE CONNECTION AT STRUCTURE IS WATERTIGHT.
9. ALL STORM SEWER MANHOLES FRAMES AND GRATES ARE TO BE SET EQUAL TO FINISH GRADES, AND SHALL HAVE TRAFFIC BEARING RING & COVERS (H20).
10. CONTRACTOR SHALL ADJUST AND/OR CUT EXISTING PAVEMENT AS NECESSARY TO ASSURE A SMOOTH FIT AND CONTINUOUS GRADE.
11. CONTRACTOR SHALL ASSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS FOR ALL NATURAL AND PAVED AREAS.
12. ALL UNSURFACED AREAS DISTURBED BY GRADING OPERATION SHALL RECEIVE 4 INCHES OF TOPSOIL. CONTRACTOR SHALL APPLY STABILIZATION FABRIC TO ALL SLOPES 3H:1V OR STEEPER. CONTRACTOR SHALL GRASS DISTURBED AREAS IN ACCORDANCE WITH THE SPECIFICATIONS UNTIL A HEALTHY STAND OF GRASS IS OBTAINED.
13. CONSTRUCTION SHALL COMPLY WITH ALL APPLICABLE GOVERNING CODES AND BE CONSTRUCTED TO SAME.
14. IF CONTRACTOR RELOCATES OR SETS NEW BENCHMARKS, THE VERTICAL ELEVATIONS OF THE BENCHMARKS SHALL BE SET WITHIN A TOLERANCE OF 0.010 FT.
15. CONTRACTOR SHALL LEAVE GRADE BEHIND CURB IN ALL PLANTER AREAS A MINIMUM OF 4" LOW FOR THE PLACEMENT OF SUITABLE TOPSOIL OR PLANTING MIX.

SITE UTILITY NOTES

- GENERAL:
1. ALL FILL MATERIAL IS TO BE IN PLACE, AND COMPACTED BEFORE INSTALLATION OF PROPOSED UTILITIES.
 2. TOPS OF EXISTING MANHOLES SHALL BE SET EQUAL TO FINISH GRADE. IN GRASSED LANDSCAPED AREAS WITH WATER TIGHT LIDS.
 3. ALL CONCRETE FOR ENCASEMENTS SHALL HAVE A MINIMUM 28 DAY COMPRESSION STRENGTH AT 3000 P.S.I.
 4. DRAWINGS DO NOT PURPORT TO SHOW ALL EXISTING UTILITIES.
 5. EXISTING UTILITIES SHALL BE VERIFIED IN FIELD PRIOR TO INSTALLATION OF ANY NEW LINES.
 6. SITE/GENERAL CONTRACTOR IS RESPONSIBLE FOR COMPLYING TO THE SPECIFICATIONS OF THE LOCAL AUTHORITIES AT THE CITY WITH REGARD TO MATERIALS AND INSTALLATION OF THE WATER AND SEWER LINES.
 7. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANIES AT LEAST 72 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.
 8. CONTRACTOR SHALL COORDINATE WITH ALL UTILITY COMPANIES FOR INSTALLATION REQUIREMENTS AND SPECIFICATIONS.
 9. CONTRACTOR SHALL COORDINATE INSPECTION OF UTILITY LINES WITH APPROPRIATE AUTHORITIES PRIOR TO BACKFILLING TRENCHES.
 10. CONTRACTOR SHALL COMPLY WITH THE LATEST OSHA STANDARDS OR DIRECTIVES OR ANY OTHER AGENCY HAVING JURISDICTION FOR EXCAVATION AND TRENCHING PROCEDURES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN AND MAINTENANCE OF ALL SUPPORT SYSTEMS, SLOPING, BENCHING, AND OTHER MEANS OF PROTECTION.
 11. CONTRACTOR SHALL COORDINATE INSTALLATION OF UTILITIES WITH LOCAL COMPANIES TO AVOID CONFLICTS AND TO ASSURE THAT PROPER DEPTHS ARE ACHIEVED. CONTRACTOR SHALL COORDINATE WITH LOCAL UTILITY COMPANIES FOR EXACT LOCATION AND SCHEDULING OF CONNECTIONS TO THEIR FACILITIES.
 12. THE LOCATION OF EXISTING UNDERGROUND UTILITIES ARE SHOWN IN AN APPROXIMATE WAY ONLY. DUE TO THE LACK OF AVAILABLE DOCUMENTATION, ALL UTILITIES, INCLUDING CURB BOXES, MAY NOT BE SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL CALL THE "DIG SAFE CENTER" TO HAVE ALL UTILITIES MARKED ON THE GROUND PRIOR TO THE START OF CONSTRUCTION
 13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATION OF ALL EXISTING UTILITIES. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH OCCUR DUE TO HIS FAILURE TO LOCATE AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.
 14. DO NOT INTERRUPT EXISTING UTILITIES WITHOUT AUTHORIZATION FROM THE OWNER, OWNERS OF ADJACENT PROPERTIES, AND THE CORRESPONDING UTILITY OWNER. CONTRACTOR SHALL ARRANGE TO SHUT OFF UTILITIES, AS REQUIRED, WITH THE UTILITY OWNERS.
 15. COORDINATE UTILITY TERMINATION WITH UTILITY OWNERS.

- SEWER:
1. SANITARY SEWER MAINS AND LATERALS SHALL BE PVC PIPE CONFORMING TO ASTM D 3034--SDR35. THE MINIMUM SIZE FOR SEWER MAINS SHAL BE 8", SEWER LATERALS SHALL BE 4" MIN.
 2. ALL SANITARY SEWERS, SEWER FORCE MAINS, AND SEWER LATERALS SHALL BE INSTALLED IN FIRST-CLASS BEDDING AND IN ACCORDANCE WITH THE DEPARTMENT OF PUBLIC WORKS SPECIFICATIONS. SEWERS SHALL BE INSTALLED TO THE LINE AND GRADE INDICATED ON THE PLANS.
 3. ONLY PRECAST CONCRETE MANHOLES OF A DESIGN APPROVED BY THE TOWN ENGINEER SHALL BE INSTALLED ON A SANITARY SEWER MAIN.
 4. NO GROUNDWATER OR SURFACE WATER SHALL BE DISCHARGED INTO THE SANITARY SEWER.
 5. WHERE ROCK IS ENCOUNTERED, IT SHALL BE REMOVED TO A DEPTH OF ONE FOOT BELOW THE FLOWLINE OF THE SEWER AND THE PIPE LAID IN A PROPERLY COMPACTED GRANULAR MATERIAL APPROVED BY THE TOWN ENGINEER.
 6. ONLY GRANULAR MATERIAL APPROVED BY THE TOWN ENGINEER SHALL BE USED AS BACKFILL IN ANY TRENCH EXCAVATION.

- WATER:
1. CONTRACTOR SHALL CONTACT THE CITY/TOWN WATER DEPARTMENT FOR SPECIFICATIONS AND MAKE OF VALVES, VALVE BOXES, FIRE HYDRANTS AND ALL OTHER WATER LINE APPURTENANCES.
 2. WATER LINE TESTING AND STERILIZATION SHALL BE PERFORMED IN ACCORDANCE WITH LOCAL DPW SPECIFICATIONS AND WATER DISTRIBUTION SYSTEM. CONTRACTOR SHALL COORDINATE TESTING WITH THE CITY WATER DEPARTMENT.
 3. ALL WATER MAIN SHALL BE DUCTILE IRON (D.I.), CLASS 52, AWWA C-151 (ANSI A21.40). D.I. PIPE SHALL BE DOUBLE CEMENT LINED WITH A SEAL COAT CONFORMING TO AWWA C-104 (ANSI A-21.4).
 4. JOINTS FOR D.I. PIPE SHALL BE PUSH-ON OR OTHERWISE APPROVED, AWWA C151(ANSI A-21.51) WITH GASKETS CONFORMING TO AWWA C-111 (ANSI A-21.11) MAXIMUM LENGTH OF PIPE TO BE 20 L.F.
 5. ALL FITTINGS SHALL BE DUCTILE IRON CLASS 53 WITH PRESSURE RATING OF 350 PSI AND MECHANICAL JOINTS CONFORMING TO AWWA C-151 (ANSI A21.51).
 6. RETAINER GLANDS: RETAINER GLANDS SHALL BE DESIGNED TO IMPART MULTIPLE WEDGING ACTION AGAINST THE PIPE, INCREASE ITS RESISTANCE AS THE PRESSURE INCREASES. GLANDS SHALL BE MANUFACTURED OF DUCTILE IRON CONFORMING TO ASTM A536-80. RESTRAINING DEVICES SHALL BE DUCTILE IRON HEAT-TREATED TO A MINIMUM HARNESS OF 370 BHN. TWIST-OFF NUTS SHALL BE USED TO INSURE PROPER ACTUATING OF THE RETAINER GLAND. DIMENSIONS OF THE GLAND SHALL BE SUCH THAT IT CAN BE USED WITH THE STANDARD MECHANICAL JOINT BELL AND TEE-HEADED BOLTS CONFORMING TO ANSI/AWWA A21.1 AND ANSI/WWA 153/A21.5. THE RETAINER GLAND SHALL HAVE A WORKING PRESSURE OF 250 PSI WITH A MINIMUM SAFETY FACTOR OF 2:1 AND SHALL BE CERTIFIED BY THE MANUFACTURER TO BE COMPATIBLE WITH THE PIPE CLASS AND PIPE MANUFACTURER FOR ALL SIZES PROVIDED ON THE JOB. THE RETAINER GLAND SHALL BE MEGA-LUG AS MANUFACTURED EBAA IRON, INC., OR APPROVED EQUAL.
 7. ALL WATER MAINS, UNLESS OTHERWISE NOTED, SHALL BE INSTALLED WITH A MINIMUM FIVE FEET OF COVER. WHEN CROSSING ABOVE OR BELOW WATER PIPELINES, A MINIMUM VERTICAL SEPARATION OF SIX INCHES SHALL BE PROVIDED. WHEN CROSSING SANITARY SEWERS, A MINIMUM OF 18" SHALL BE PROVIDED.

SITE UTILITY NOTES (CONTINUED)

8. THE INSTALLED WATER MAIN SHALL BE PRESSURE TESTED, FLUSHED AND DISINFECTED BY CONTRACTOR IN ACCORDANCE WITH AWWA C-600 AND AWWA C-651 OR PER CITY/TOWN WATER DEPARTMENT STANDARDS.
9. DUCTILE IRON PIPES SHALL BE INSTALLED IN ACCORDANCE WITH AWWA C-600.
10. ALL MECHANICAL JOINTS ARE TO BE RESTRAINED. FITTINGS SHALL BE RESTRAINED BY MECHANICAL JOINT RESTRAINTS. THE PIPE CONNECTED TO THE FITTING SHALL BE RESTRAINED PER THE MANUFACTURER'S SCHEDULE.
11. THE CONTRACTOR SHALL MARK THE LOCATION OF THE PROPOSED WATER MAIN AT LEAST 48 HOURS PRIOR TO EXCAVATING. EXCAVATION SHALL NOT PROCEED WITHOUT AUTHORIZATION BY THE ENGINEER.
12. ALL WATER MAINS, HYDRANT BRANCHES, AND SERVICES SHALL HAVE UTILITY WARNING TAPE. THE TAPE SHALL BE BURIED APPROXIMATELY 2 FEET BELOW FINISHED GRADE.
13. BACKFILL SHALL BE COMPACTED TO 95 PERCENT OF THE STANDARD PROCTOR DENSITY AS DETERMINED BY ASTM D698. COMPACTION EQUIPMENT USED MUST BE SPECIFICALLY DESIGNED FOR COMPACTION. TAMPING WITH THE BACK OF THE BACK HOE BUCKET IS UNACCEPTABLE COMPACTION.
14. ALL WATER SERVICES SHALL BE 1" DIA. COPPER TUBING TYPE K, SOFT TEMPER CONFORMING TO ASTM B88 UNLESS OTHERWISE NOTED.
15. DEPRESS WATER MAIN UNDER EXISTING SERVICES AND HYDRANT BRANCHES TO MAINTAIN 5'-0" OF COVER.
16. ALL WATER MAINS SHALL BE LAID PER THE PLANS TO MAINTAIN THE MAXIMUM SEPARATION FROM EXISTING OR PROPOSED SANITARY SEWER. DISTANCE SHALL BE MEASURED EDGE TO EDGE.
17. IDENTIFY EACH PIPE LENGTH & FITTING CLEARLY WITH MANUFACTURE'S NAME & TRADEMARK. NOMINAL PIPE SIZE & MATERIAL DESIGNATION.
18. ALL WATER MAINS & SERVICE PIPES SHALL BE LAID IN A TRENCH SEPARATE FROM ANY OTHER UTILITY (GAS, ELECTRIC, TELEPHONE, ETC.) SHALL BE A MINIMUM NO LESS THAN FIVE (5) FEET FROM ANOTHER UTILITY.
19. ALL MATERIAL SHALL BE IN ACCORDANCE WITH CITY/TOWN WATER DEPARTMENT "RULES & REGULATIONS". ALL WORK TO BE PERFORMED IN ACCORDANCE WITH CITY/TOWN WATER DEPARTMENT "SPECIFICATIONS". CITY/TOWN WATER DEPARTMENT STANDARDS SHALL TAKE PRECEDENCE OVER ANY REQUIREMENTS LISTED ABOVE.



RLA

R LEVESQUE ASSOCIATES INC.

Landscape Architects
Civil Engineers - Land Surveyors
Environmental Consultants

ph: 413.568.0985 fax: 413.568.0986


40 School Street
Westfield, MA 01085
rlaland.com

CONSTRUCTION NOTES

362-368 PARKER STREET

PARCEL ID: 75-10-1A,75-11-0 63-26-0 and 62-31-A+B

EAST LONGMEADOW MA.



PREPARED FOR:

Bretta Construction LLC

32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023

REVISIONS:	DATE:



DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF THIS DOCUMENT IS A VIOLATION OF MASSACHUSETTS STATE LAW

SCALE: As Noted

RLA PROJ. NUMBER: 230113

DRAWING#	REV.
C-2	-

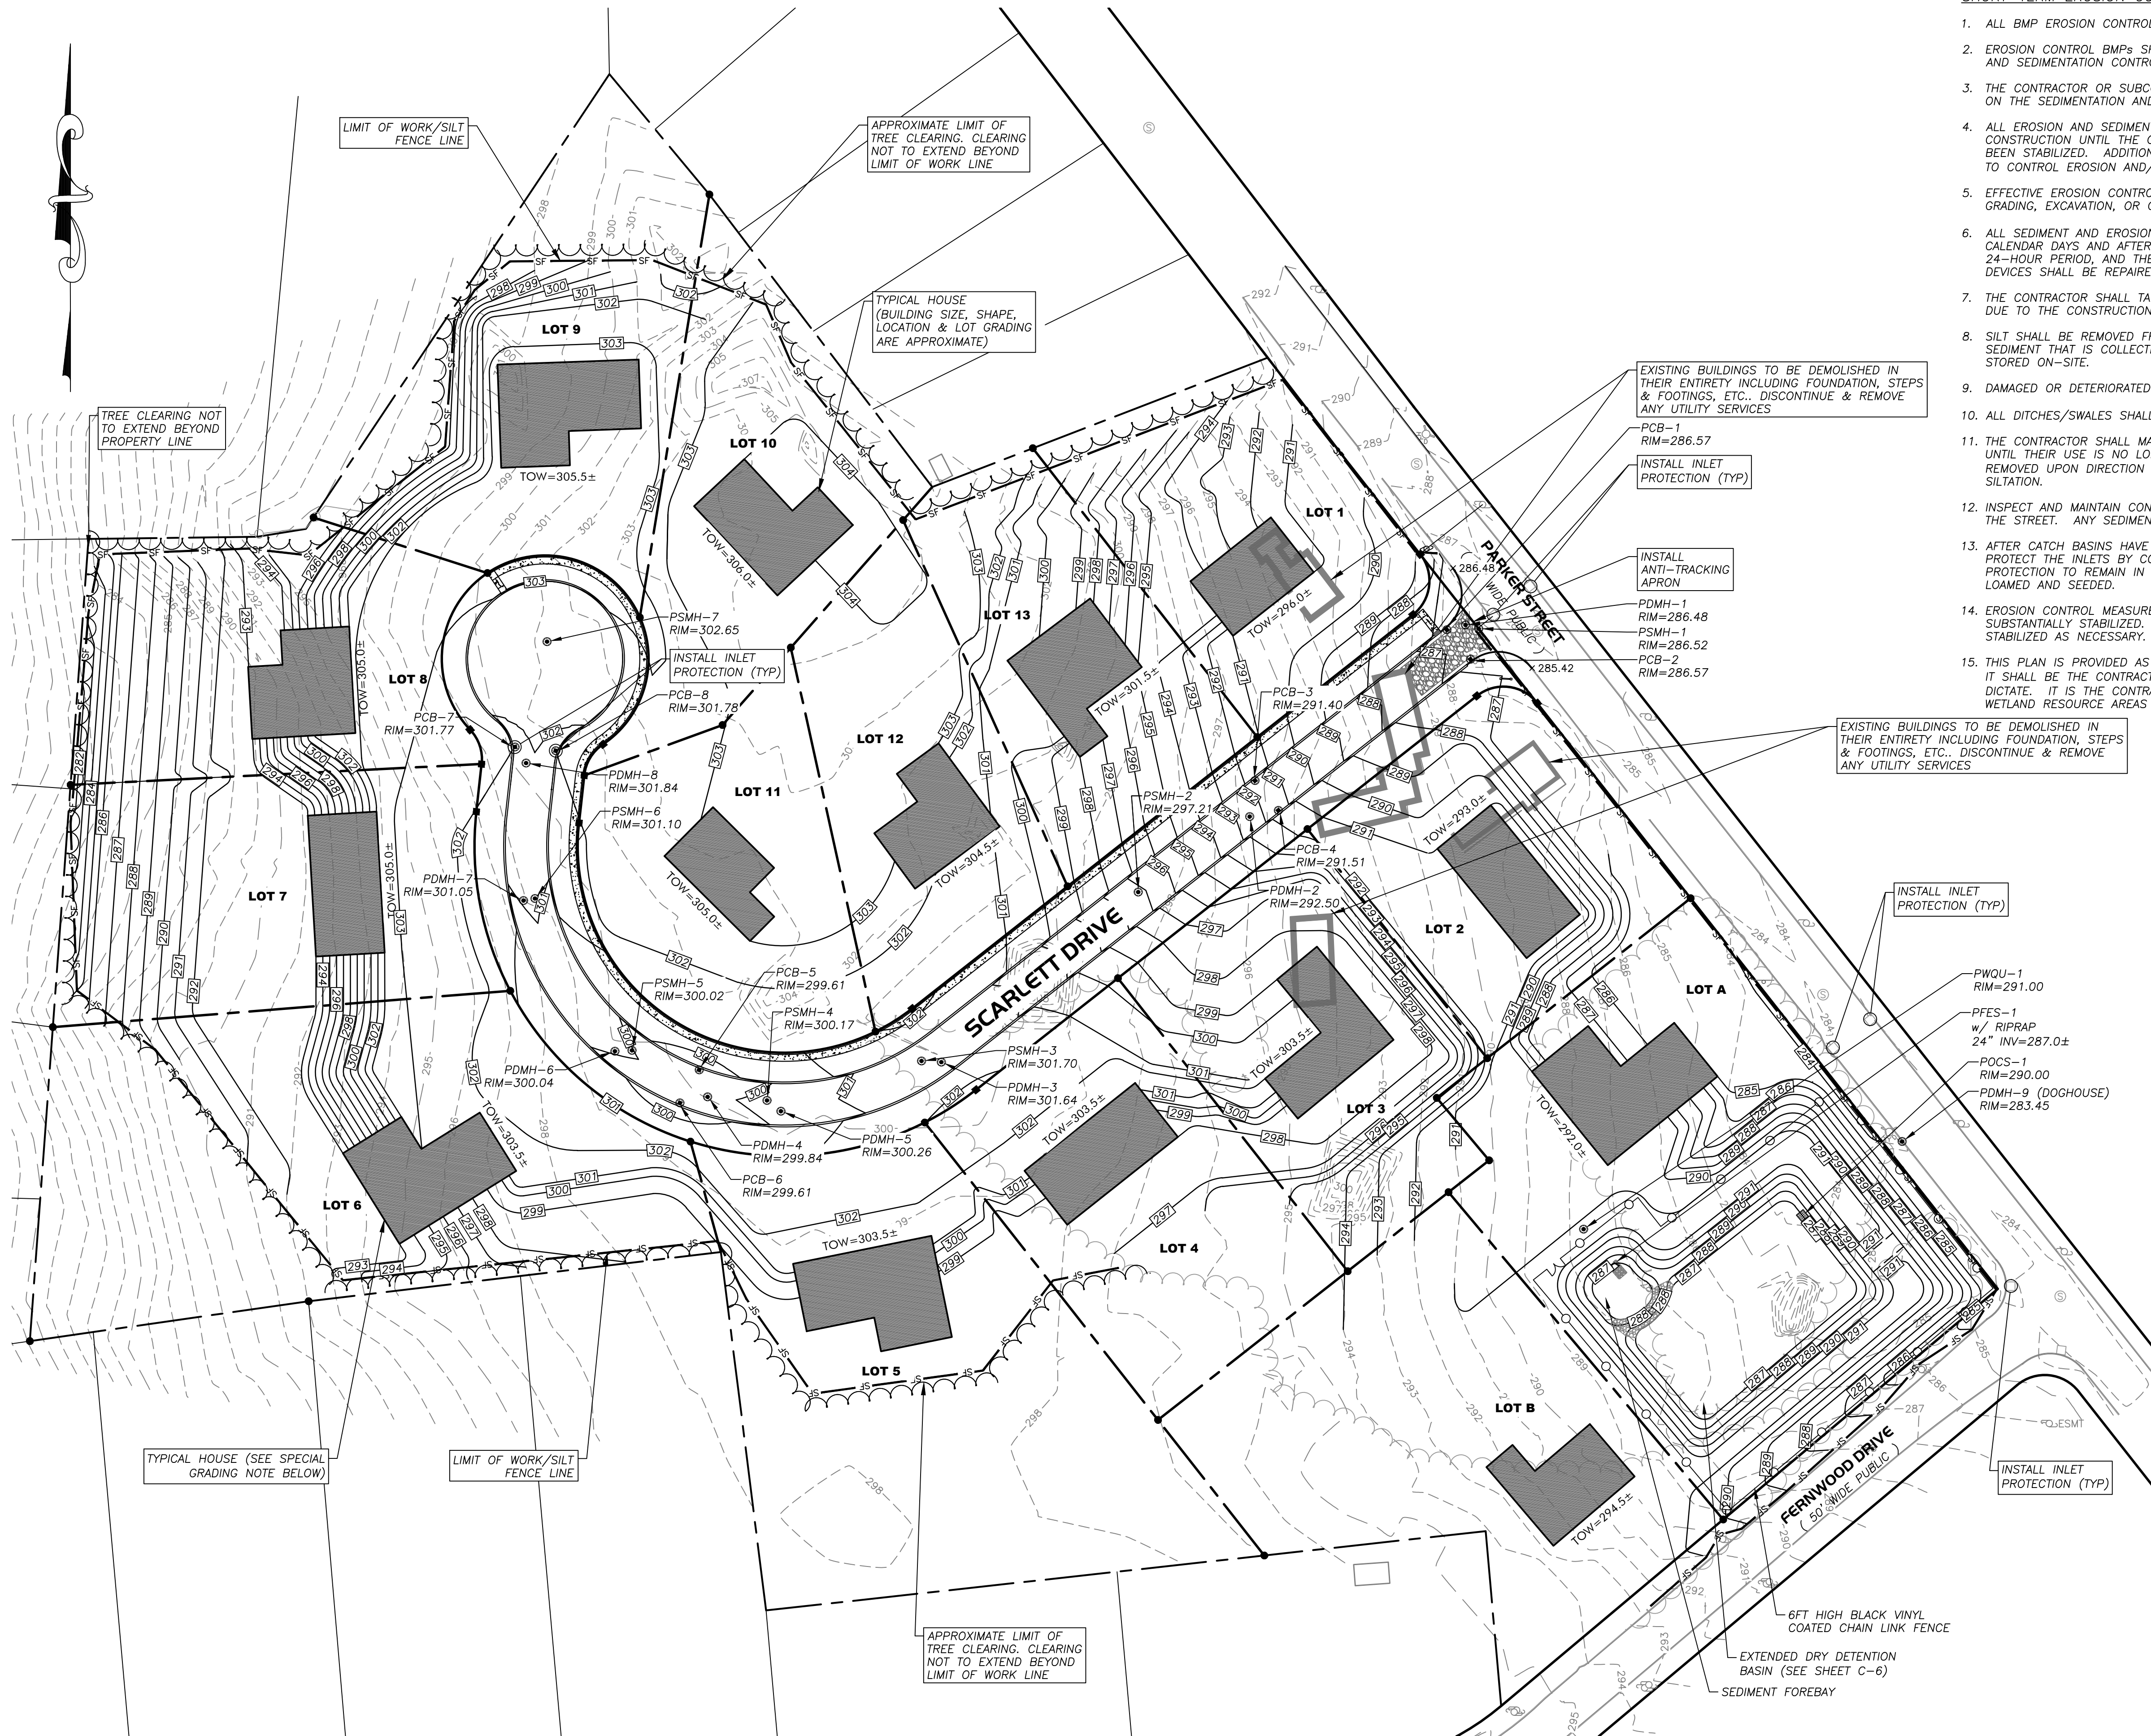

SHORT-TERM EROSION CONTROL MAINTENANCE

1. ALL BMP EROSION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO DEMOLITION OR ANY SITE WORK.
2. EROSION CONTROL BMPs SHALL CONFORM TO US EPA, NPDES, MA DEP AND MASSACHUSETTS EROSION AND SEDIMENTATION CONTROL GUIDELINES FOR URBAN AND SUBURBAN AREAS.
3. THE CONTRACTOR OR SUBCONTRACTOR WILL BE RESPONSIBLE FOR IMPLEMENTING EACH CONTROL SHOWN ON THE SEDIMENTATION AND EROSION CONTROL PLAN.
4. ALL EROSION AND SEDIMENT CONTROL DEVICES SHALL BE PROPERLY MAINTAINED DURING ALL PHASES OF CONSTRUCTION UNTIL THE COMPLETION OF ALL CONSTRUCTION ACTIVITIES AND ALL DISTURBED AREAS HAVE BEEN STABILIZED. ADDITIONAL CONTROL MEASURES WILL BE INSTALLED DURING CONSTRUCTION IN ORDER TO CONTROL EROSION AND/OR OFF-SITE SEDIMENTATION IF DEEMED NECESSARY BY ON-SITE INSPECTION.
5. EFFECTIVE EROSION CONTROL MEASURES SHALL BE INITIATED PRIOR TO THE COMMENCEMENT OF CLEARING, GRADING, EXCAVATION, OR OTHER OPERATIONS THAT WILL DISTURB THE NATURAL PROTECTION.
6. ALL SEDIMENT AND EROSION CONTROL DEVICES SHALL BE INSPECTED AT LEAST ONCE EVERY SEVEN (7) CALENDAR DAYS AND AFTER ANY STORM EVENT GREATER THAN 0.5 INCHES OF PRECIPITATION DURING ANY 24-HOUR PERIOD, AND THE INSPECTION SHALL BE DOCUMENTED IN WRITING. DAMAGED OR INEFFECTIVE DEVICES SHALL BE REPAIRED OR REPLACED, AS NECESSARY.
7. THE CONTRACTOR SHALL TAKE ALL REASONABLE PRECAUTIONS TO AVOID EXCESS EROSION OF THE SITE DUE TO THE CONSTRUCTION OF THIS PROJECT.
8. SILT SHALL BE REMOVED FROM BEHIND BARRIERS IF GREATER THAN 6-INCHES DEEP OR AS NEEDED. SEDIMENT THAT IS COLLECTED IN STRUCTURES SHALL BE DISPOSED OF PROPERLY AND COVERED IF STORED ON-SITE.
9. DAMAGED OR DETERIORATED ITEMS WILL BE REPAIRED IMMEDIATELY AFTER IDENTIFICATION.
10. ALL DITCHES/SWALES SHALL BE STABILIZED AS SOON AS IS PRACTICABLE TO MINIMIZE EROSION.
11. THE CONTRACTOR SHALL MAINTAIN ALL EROSION CONTROL DEVICES IN A GOOD, WORKING STATE OF REPAIR UNTIL THEIR USE IS NO LONGER WARRANTED. AT THAT TIME, THE EROSION CONTROL DEVICES SHALL BE REMOVED UPON DIRECTION FROM THE CITY/TOWN AND DISPOSED OF SO AS TO CAUSE NO OFF-SITE SILTATION.
12. INSPECT AND MAINTAIN CONSTRUCTION ENTRANCE STONE SUCH THAT SEDIMENT DOES NOT TRACK ONTO THE STREET. ANY SEDIMENT TRACKED ONTO THE STREET SHALL BE CLEANED DAILY.
13. AFTER CATCH BASINS HAVE BEEN CONSTRUCTED AND THE SITE HAS BEEN PAVED, THE CONTRACTOR SHALL PROTECT THE INLETS BY CONSTRUCTING INLET PROTECTION AS SHOWN ON THE PLANS. INLET PROTECTION TO REMAIN IN PLACE AND MAINTAINED UNTIL DISTURBED AREAS HAVE BEEN STABILIZED, LOAMED AND SEED.
14. EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL ALL DISTURBED EARTH HAS BEEN SUBSTANTIALLY STABILIZED. AFTER REMOVAL OF MEASURES, DISTURBED AREAS SHALL BE REGRADED AND STABILIZED AS NECESSARY.
15. THIS PLAN IS PROVIDED AS A BASIS FOR THE INITIAL SEDIMENTATION AND EROSION CONTROL MEASURES. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO UPDATE AND EXPAND THIS PLAN AS SITE CONDITIONS DICTATE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PREVENT THE OCCURRENCE OF SILTATION TO WETLAND RESOURCE AREAS AND THE MOVEMENT OF SEDIMENT BEYOND THE SITE BOUNDARIES.

CONSTRUCTION SEQUENCE

1. CONTACT THE TOWN OF EAST LONGMEADOW AT LEAST FORTY-EIGHT HOURS PRIOR TO COMMENCEMENT OF ANY DEMOLITION, CONSTRUCTION, OR EARTHWORK ACTIVITY ON THIS PROJECT.
2. CONSTRUCT ANTI-TRACKING PAD AT ENTRANCE AND INSTALL ANY REQUIRED INLET PROTECTION AS DEPICTED ON THE PLAN.
3. INSTALL SILT FENCE AS SHOWN ON THE PLANS.
4. UPON COMPLETION OF EROSION CONTROL MEASURES, CLEARING AND GRUBBING AND EARTHWORK MAY COMMENCE.
5. CLEAR AND GRUB SITE. STOCKPILE ANY CHIPPING OR TOPSOIL MATERIAL TO REMAIN ON SITE FOR LONGER THAN 14 DAYS AND INSTALL SILT FENCE AROUND THE PERIMETER OF THE STOCKPILE.
6. COMMENCE EARTHWORK BY EXCAVATING FOR THE CUT/FILL SLOPES AS SHOWN ON THE PLANS. STABILIZE/SEED ANY SLOPES THAT HAVE ACHIEVED FINAL GRADE.
7. INSTALL UTILITIES AS SHOWN ON PLANS INCLUDING ELECTRICAL AND COMMUNICATION SERVICES AND STORMWATER MANAGEMENT SYSTEM.
8. GRADE THE ALIGNMENT OF THE ROADWAY TO ACCEPT PAVEMENT SECTION MATERIALS.
9. INSTALL PAVEMENT AS SPECIFIED ON THE PLANS.
10. UPON INSTALLATION OF PAVEMENT SURFACE, INSTALL INLET PROTECTION AS REQUIRED ON ANY NEW INLET STRUCTURES.
11. FINAL GRADING AND STABILIZATION OF ANY REMAINING EXPOSED AREAS.
12. AT THE DIRECTION OF THE TOWN OF EAST LONGMEADOW, EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED.

SPECIAL GRADING NOTE

1. PROPOSED LOT GRADING AND TOP OF WALL ELEVATIONS SHOWN ARE APPROXIMATE BASED UPON OBSERVED SEASONAL HIGH GROUNDWATER. EACH LOT OWNER IS RESPONSIBLE FOR DETERMINING FINAL TOP OF WALL ELEVATIONS AND FOR THE IMPORT OF ANY FILL MATERIAL REQUIRED TO GRADE THE LOT.
2. PROPOSED GRADING AS SHOWN ON THIS PLAN IS CONCEPTUAL (EXCLUDING ROADWAY DESIGN OF SCARLETT DRIVE). CONTRACTOR SHALL ACHIEVE POSITIVE DRAINAGE AWAY FROM ALL PROPOSED BUILDINGS.

East Longmeadow Planning Board	
Action Taken	Date
Application Filed	
Preliminary Plan Filed	
Definitive Plan Filed	
Public Hearing	
Approval of Board of Health	
Plan Approved	
Plan Endorsed	
Names of Planning Board Members	

GRADING, EROSION & SEDIMENTATION CONTROL PLAN

362-368 PARKER STREET
PARCEL ID: 75-10-A, 75-11-O 63-26-O and 62-31-A+B
EAST LONGMEADOW MA.



PREPARED FOR:

Bretta Construction LLC
32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023

REVISIONS: DATE:

DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF THIS DOCUMENT IS A VIOLATION OF MASSACHUSETTS STATE LAW

SCALE: As Noted


RLA PROJ. NUMBER: 230113

DRAWING# REV.

C-3

-

RLA
R LEVESQUE ASSOCIATES INC.
Landscape Architects
Civil Engineers · Land Surveyors
Environmental Consultants
ph: 413.568.0985 fax: 413.568.0986
40 School Street
Westfield, MA 01085
rlaland.com

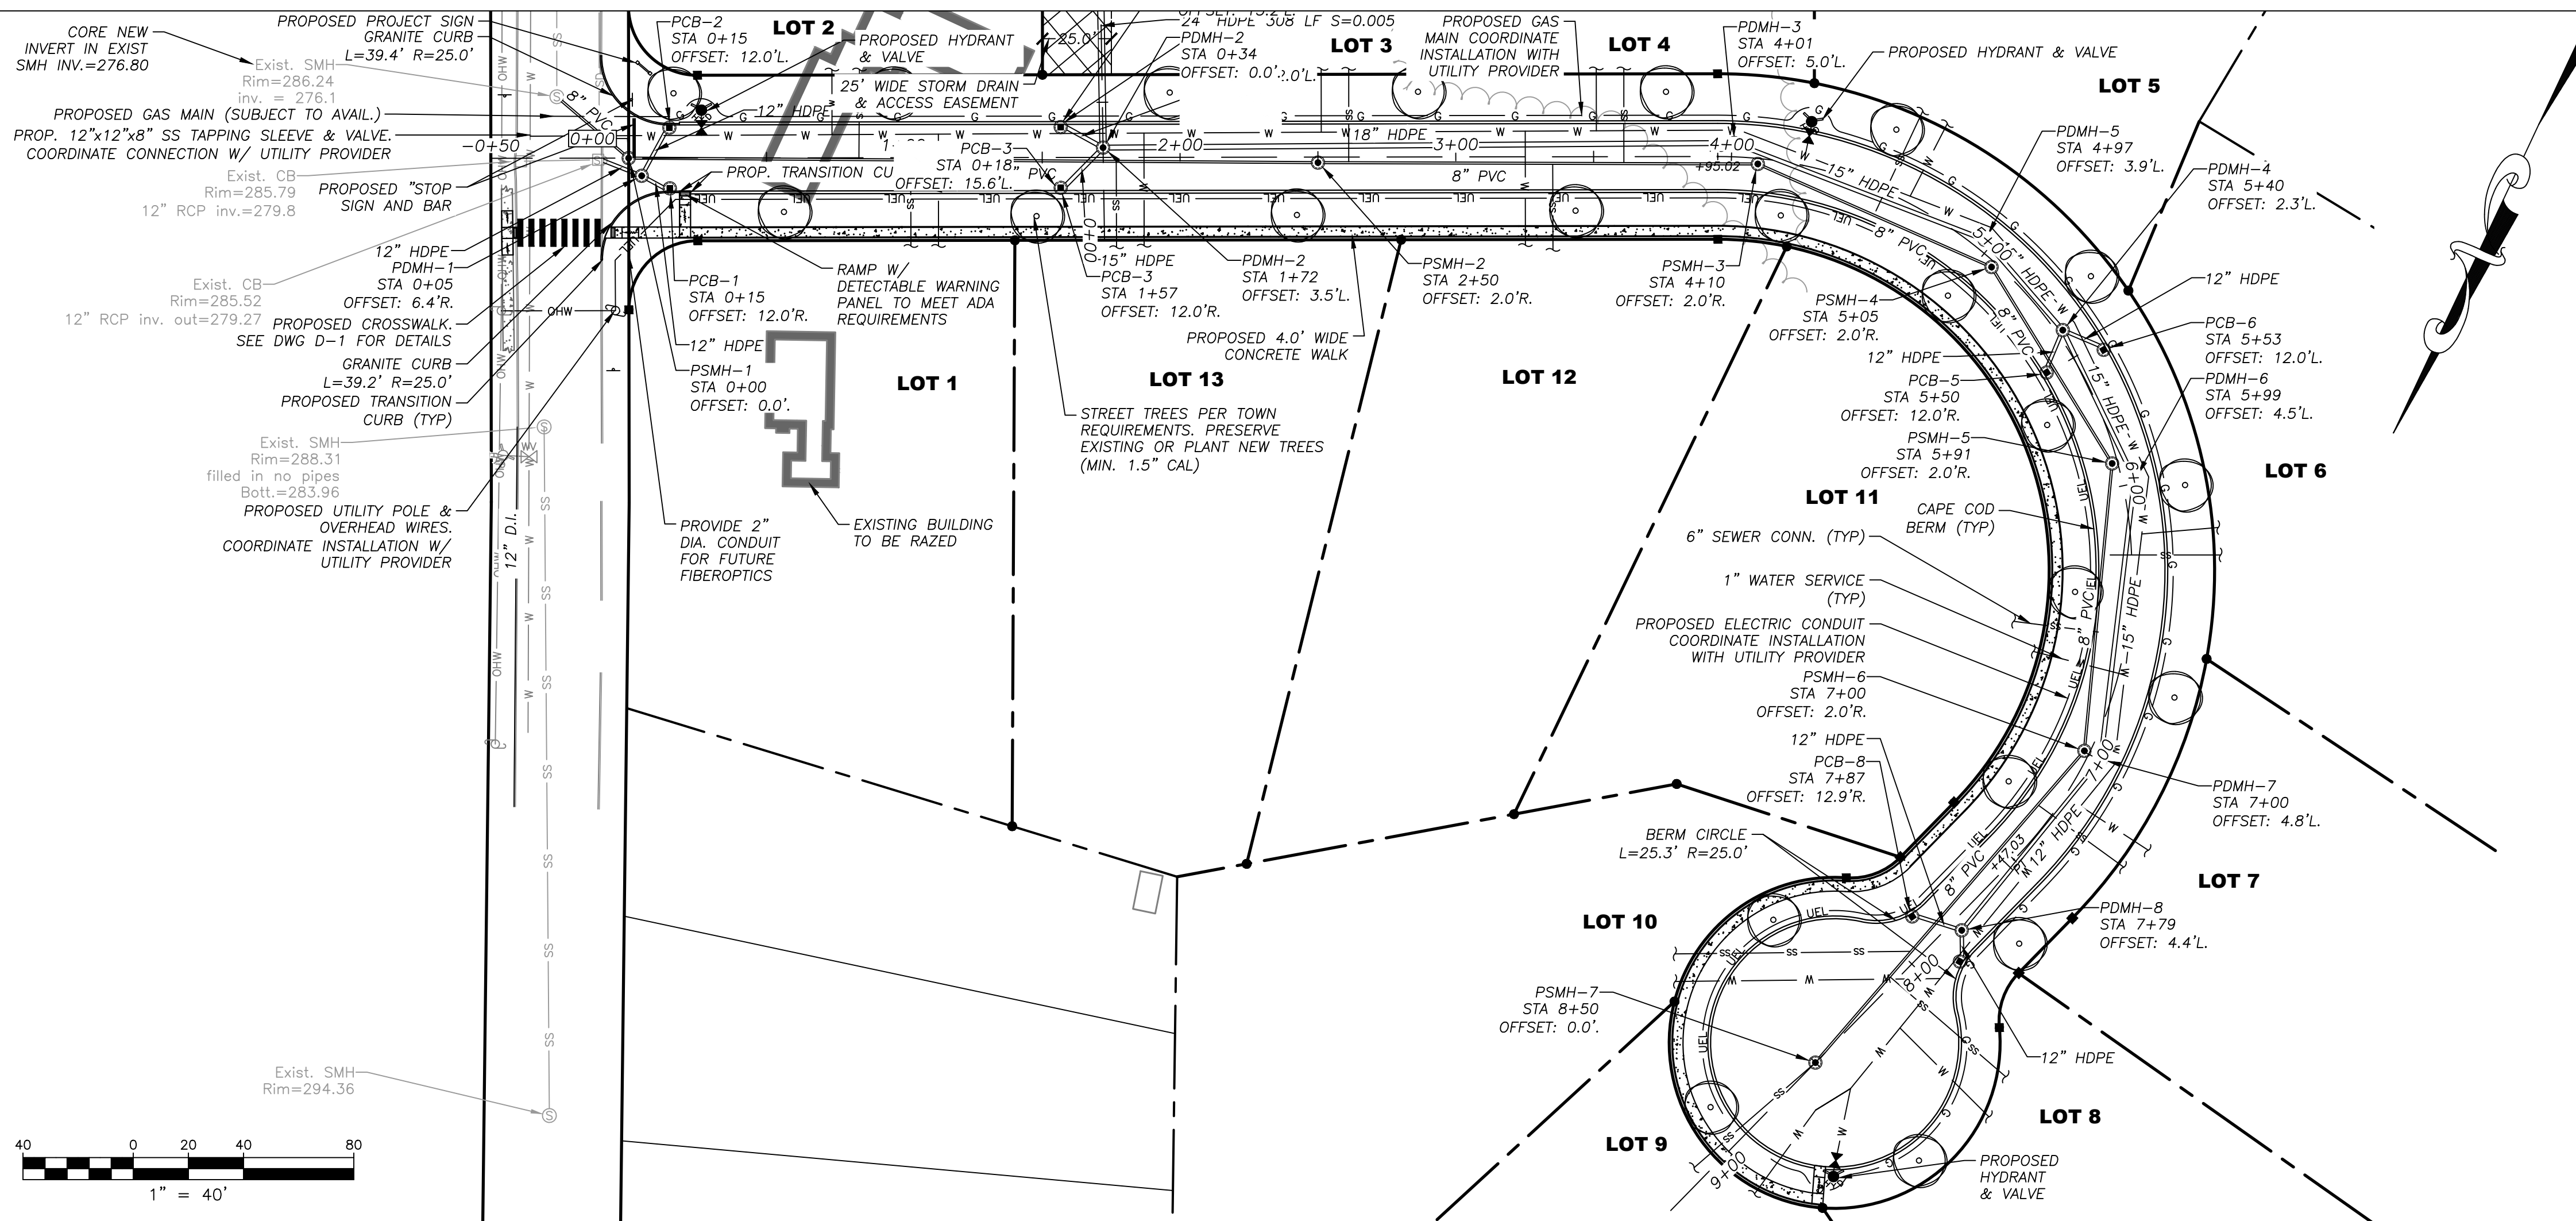


GENERAL NOTES

1. THE CONTRACTOR SHALL OBTAIN A LETTER OF APPROVAL FROM DPW PRIOR TO ANY CONSTRUCTION WITHIN THE RIGHT-OF-WAY.
2. ALL WATER CONSTRUCTION SHALL CONFORM TO THE TOWN OF EAST LONGMEADOW REQUIREMENTS.
3. ALL WATER CONSTRUCTION SHALL BE INSPECTED BY THE TOWN OF EAST LONGMEADOW DPW BEFORE BEING BACKFILLED. TOWN SHALL BE NOTIFIED AT LEAST 24 HOURS PRIOR TO THE REQUIRED INSPECTIONS.

LANDSCAPE NOTES

1. STREET TREE SELECTION SHALL BE APPROVED BY THE DEPARTMENT OF PUBLIC WORKS.
2. PLANTING PERIOD SHALL BE NOTED AS MARCH 15 TO MAY 15 AND SEPTEMBER 15 TO NOVEMBER 15, WEATHER PERMITTING.

ALL MATERIALS AND CONSTRUCTION METHODS TO CONFORM TO TOWN OF EAST LONGMEADOW PLANNING BOARD REGULATIONS AND BOARD OF PUBLIC WORKS SPECIFICATIONS

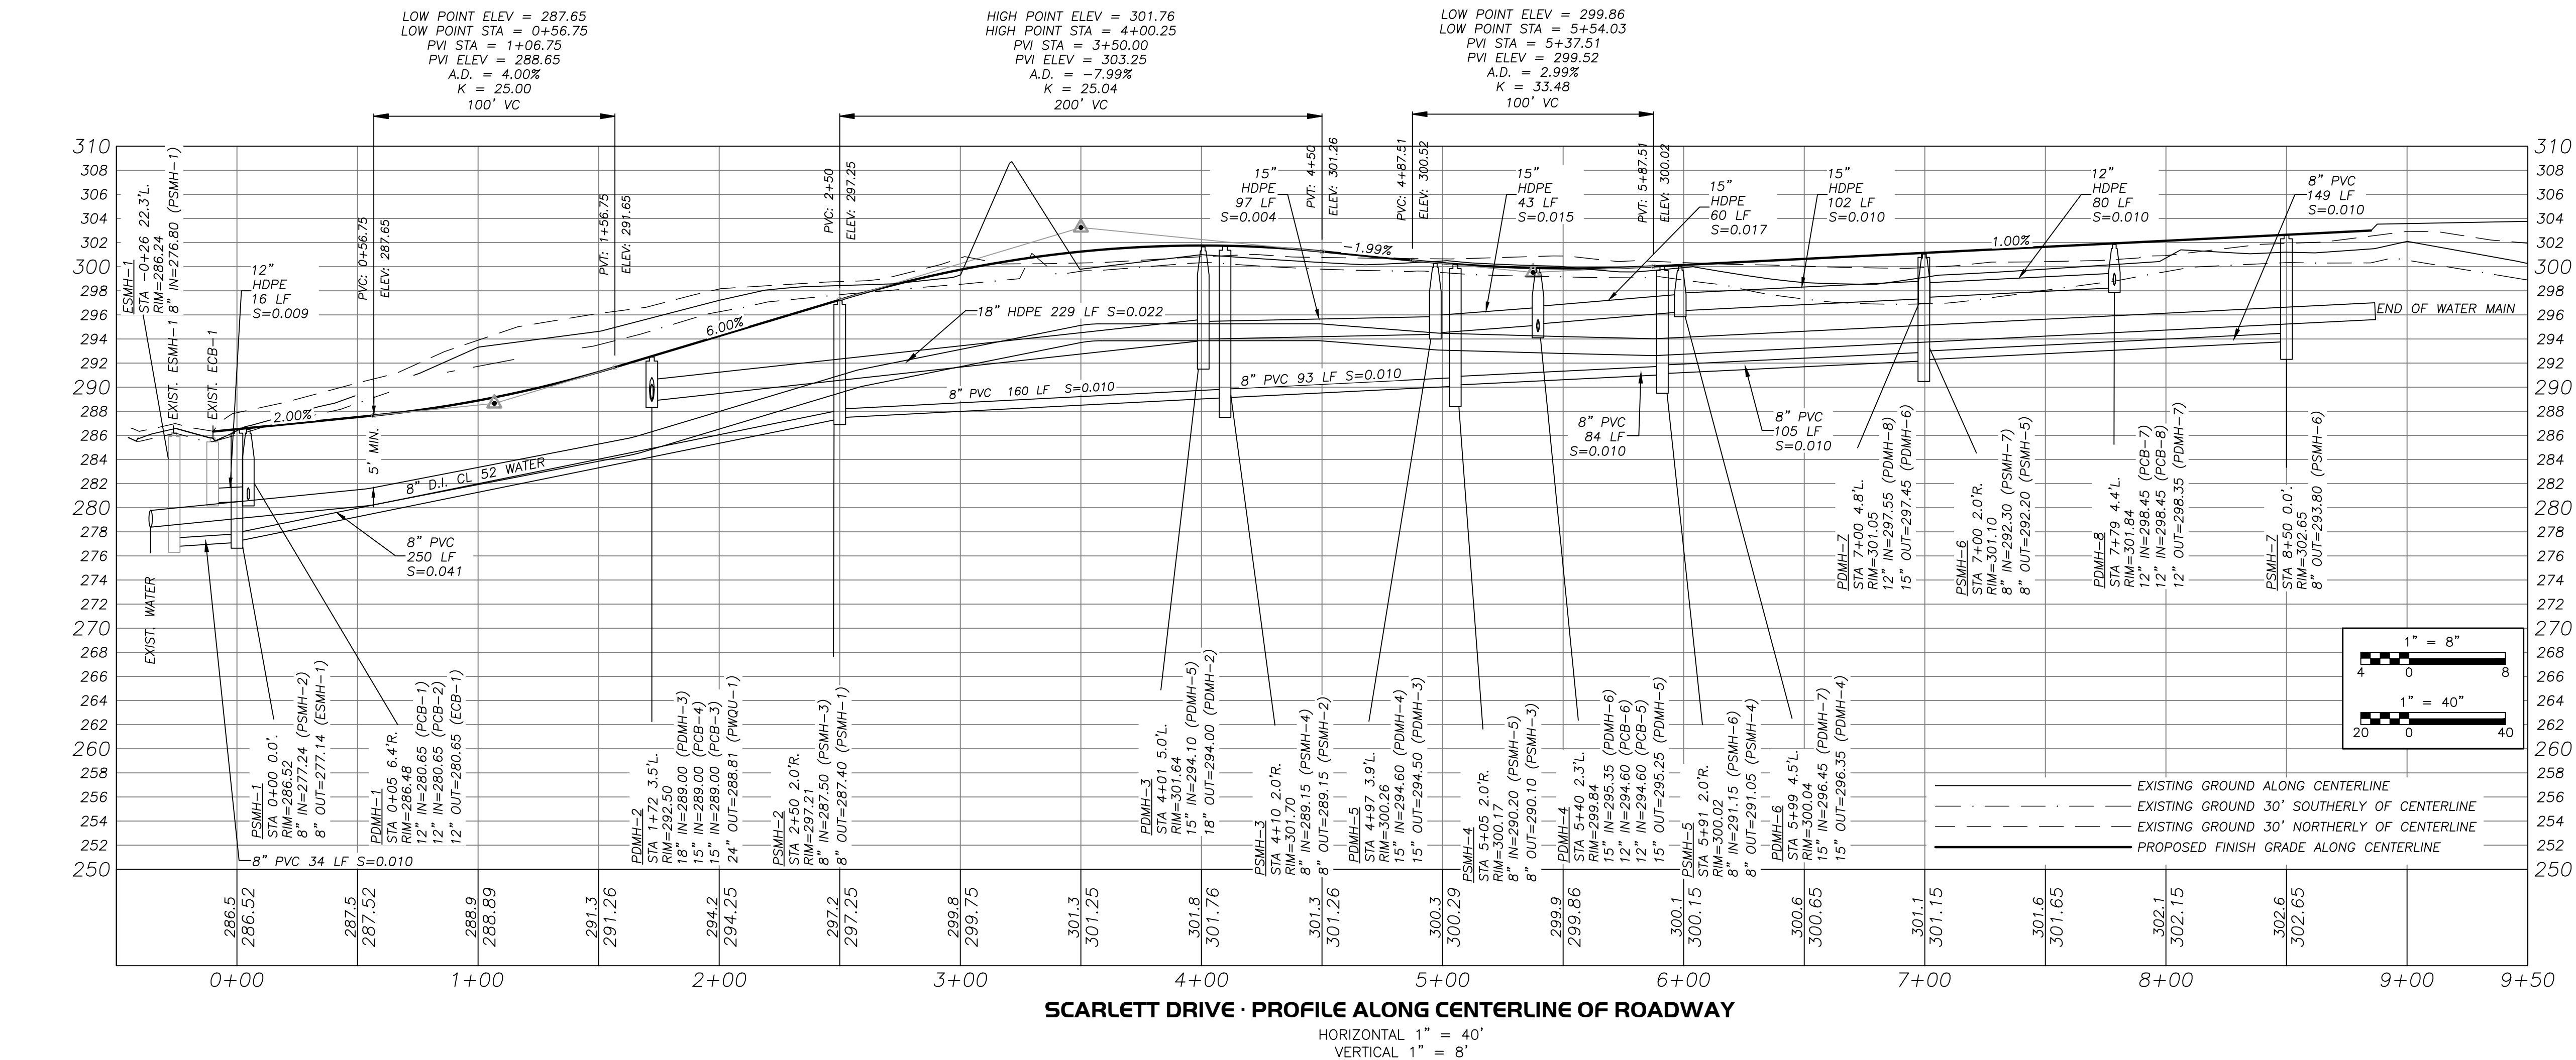

RLA
R LEVESQUE ASSOCIATES INC.
Landscape Architects
Civil Engineers - Land Surveyors
Environmental Consultants
ph: 413.568.0985 fax: 413.568.0986
40 School Street
Westfield, MA 01085
rlaland.com

PLAN AND PROFILE
SCARLETT DRIVE
Sta - 0+50 to 9+50
362-368 PARKER STREET
PARCEL ID: 75-10-1A, 75-11-0 63-26-0 and 62-31-A+B
EAST LONGMEADOW MA.



PREPARED FOR:

Bretta Construction LLC
32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023
REVISIONS: DATE:
A. Sidewalk/crosswalk modifications 12/27/23

DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF THIS DOCUMENT IS A VIOLATION OF MASSACHUSETTS STATE LAW


SCALE: As Noted

RLA PROJ. NUMBER: 230113

DRAWING# REV.


C-4 **A**

S:\Projects\2023\230113 - Bretta -562 & 368 Parker Street - East Longmeadow 05 Civil 3D\230113 - Definitive.dwg

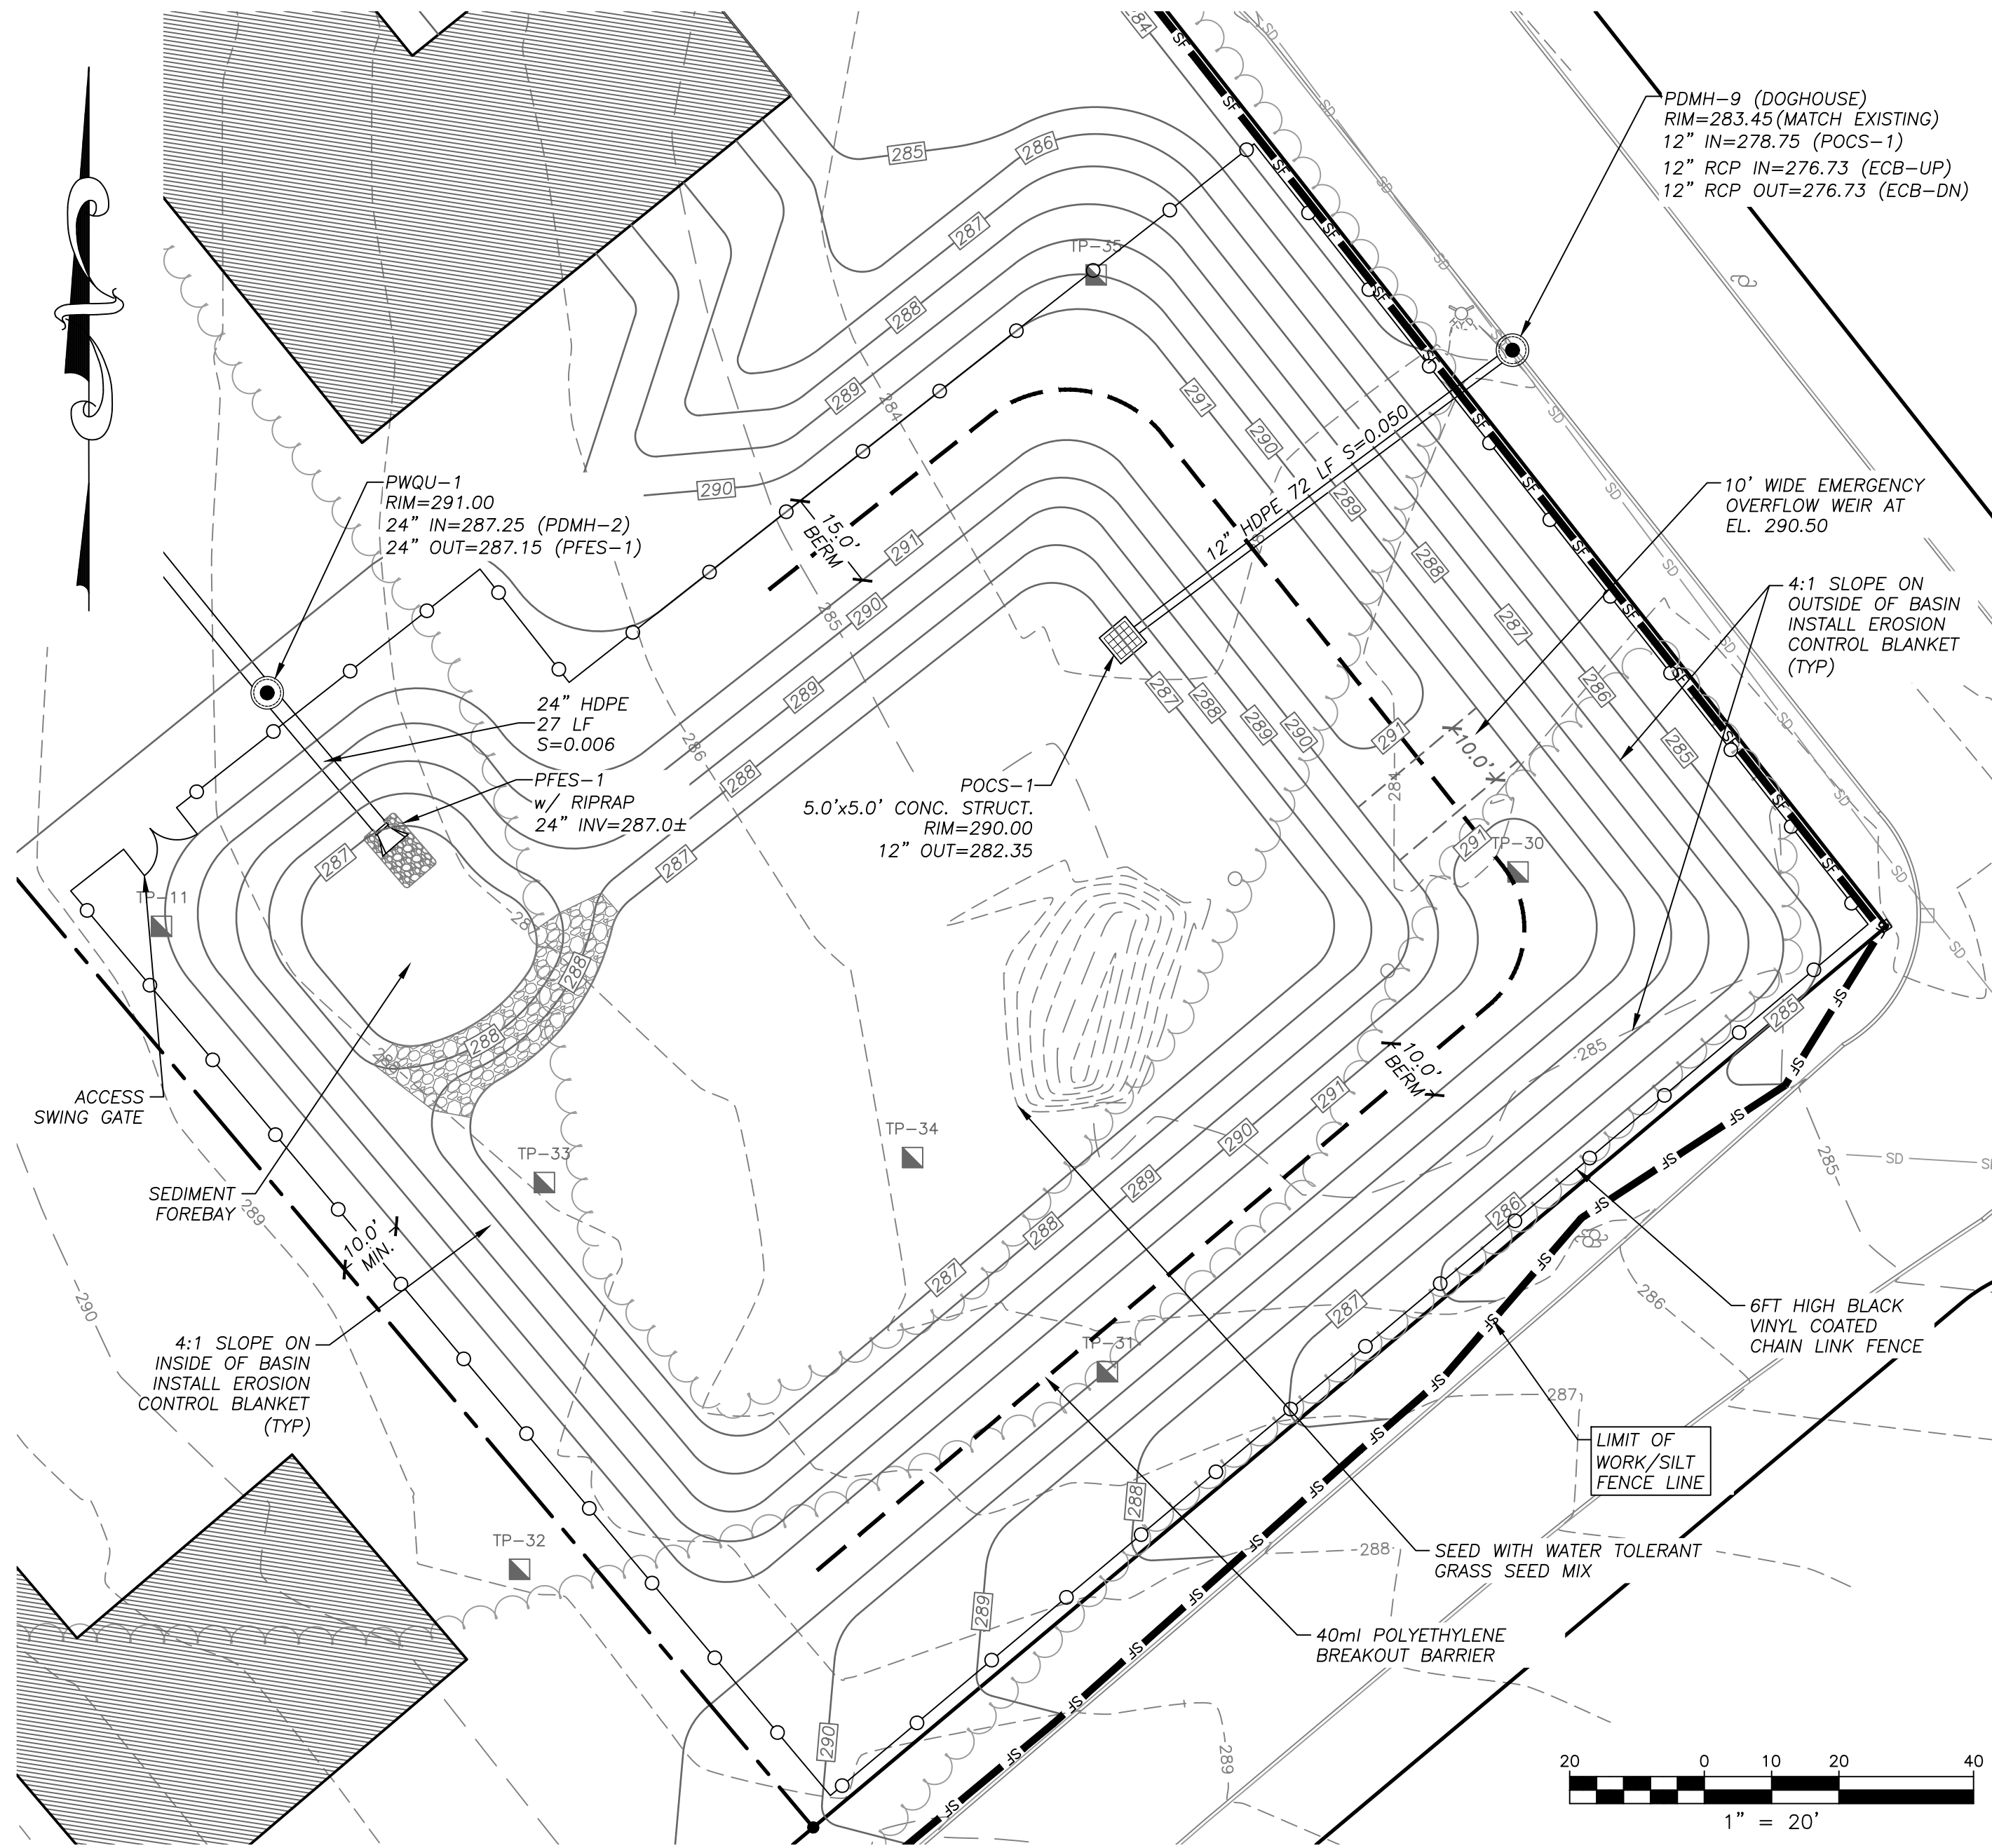


EXTENDED DRY DETENTION BASIN


1" = 20'

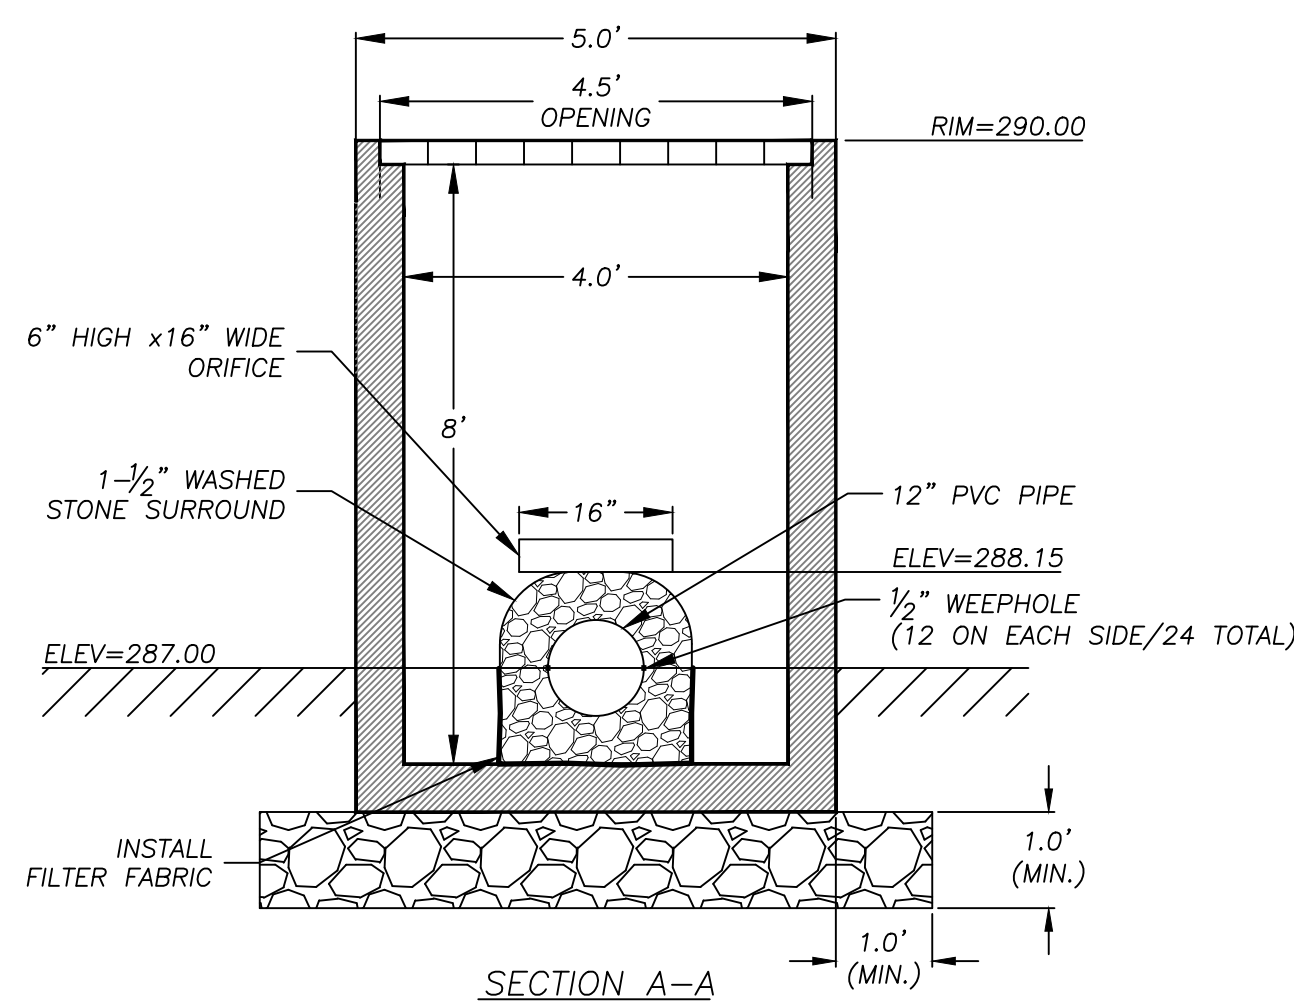

SECTION A-A

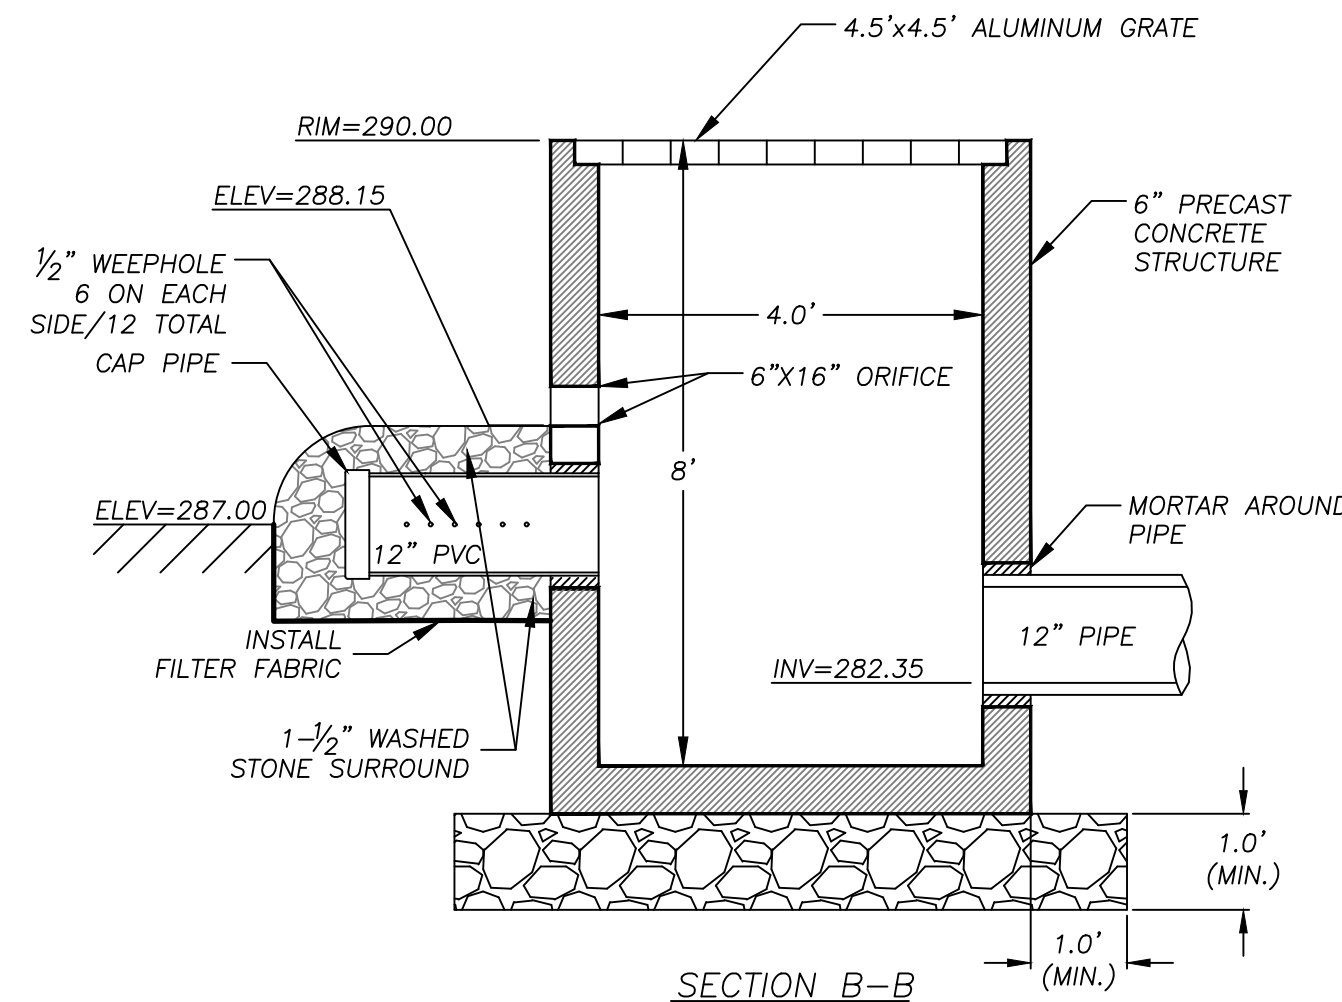


SECTION B-B

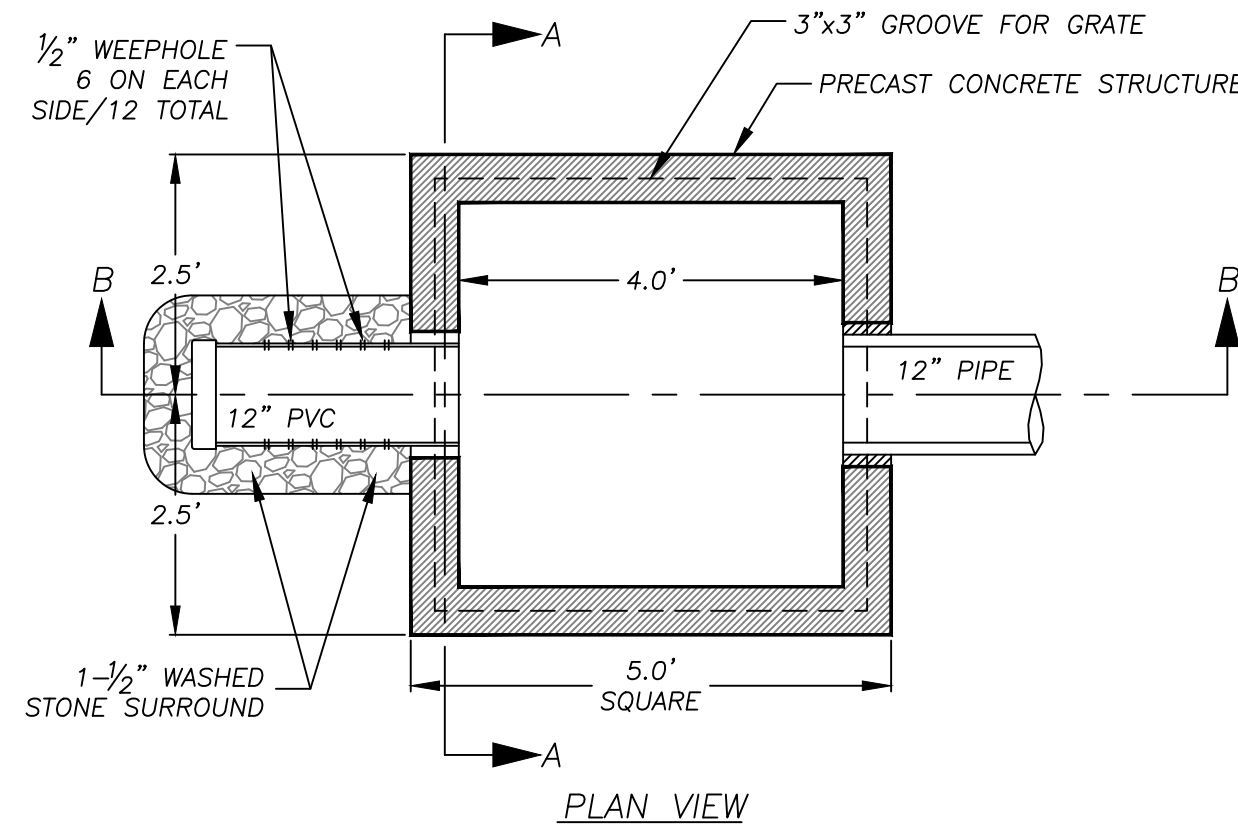

PLAN VIEW

OUTLET CONTROL STRUCTURE (POCS-1)

NO SCALE

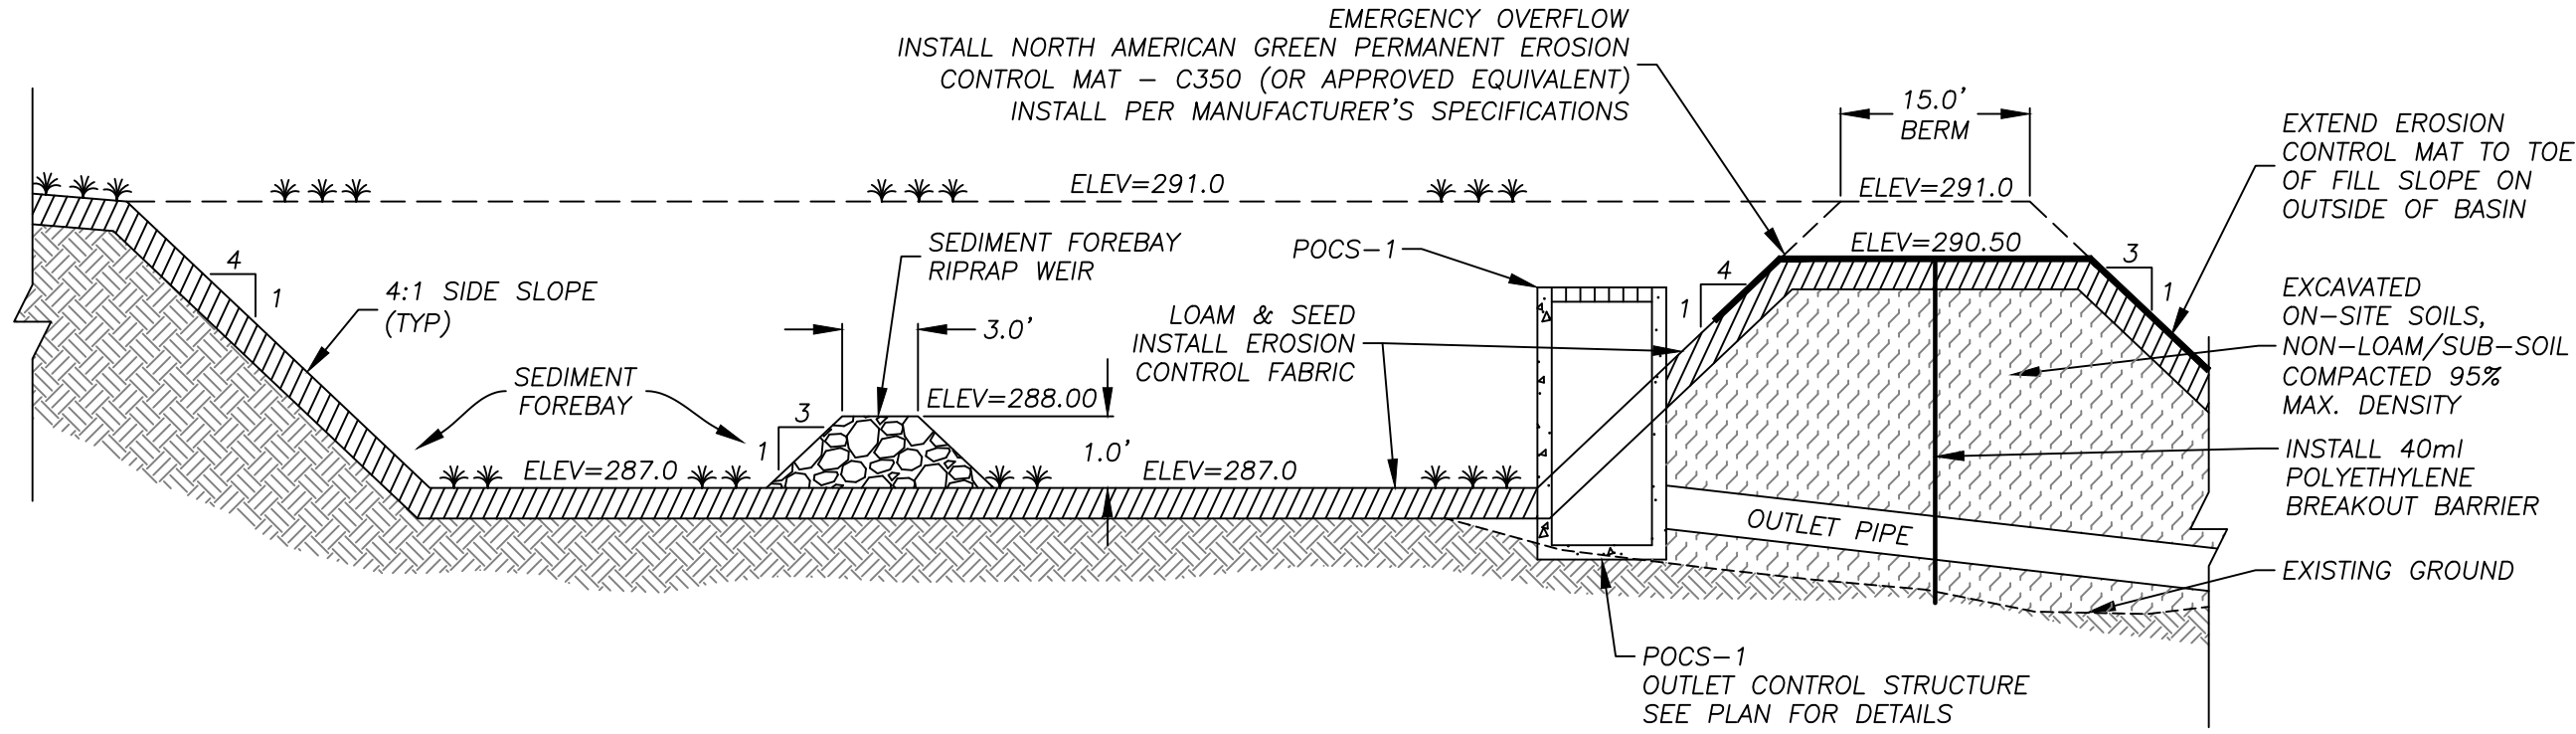


SECTION THROUGH EXTENDED DRY DETENTION BASIN

NO SCALE


SURFACE EXTENDED DRY DETENTION BASIN
CONSTRUCTION NOTE

THE ENGINEER SHALL INSPECT THE CONSTRUCTION OF THE BASIN AT THE MILESTONES LISTED BELOW. THE CONTRACTOR SHALL NOTIFY THE ENGINEER AT LEAST 24 HOURS PRIOR TO BEGINNING CONSTRUCTION ON THE FOLLOWING:


1. COMPLETION OF EXCAVATION FOR THE INFILTRATION BASIN AREA TO SUBGRADE
2. AFTER SPREADING OF DENSE TURF SEED OR WATER-TOLERANT GRASS

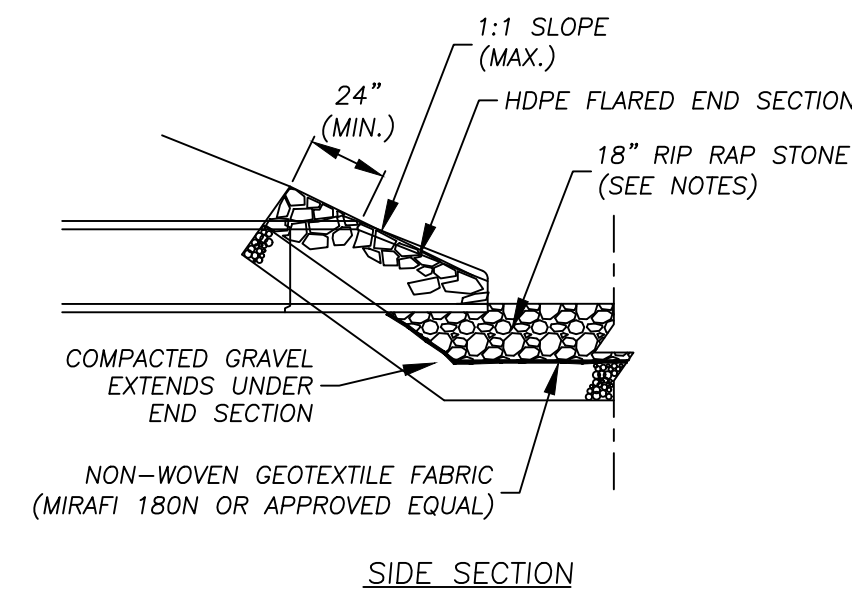

SIDE SECTION

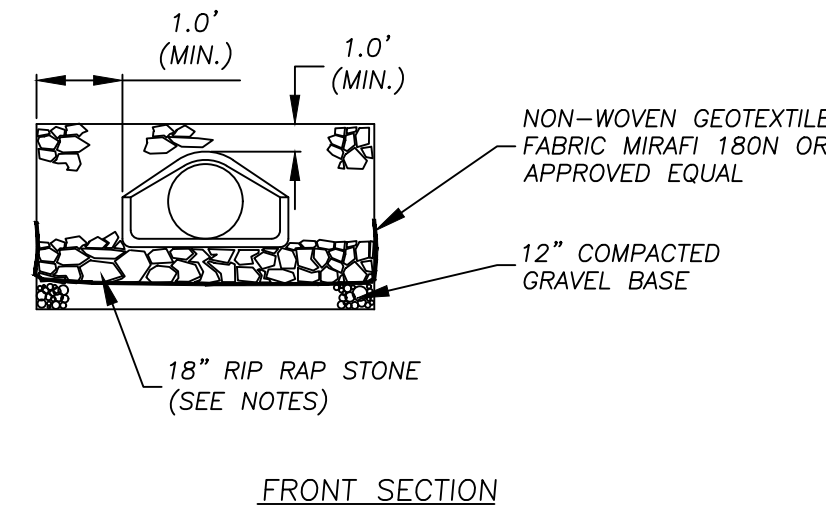

FRONT SECTION

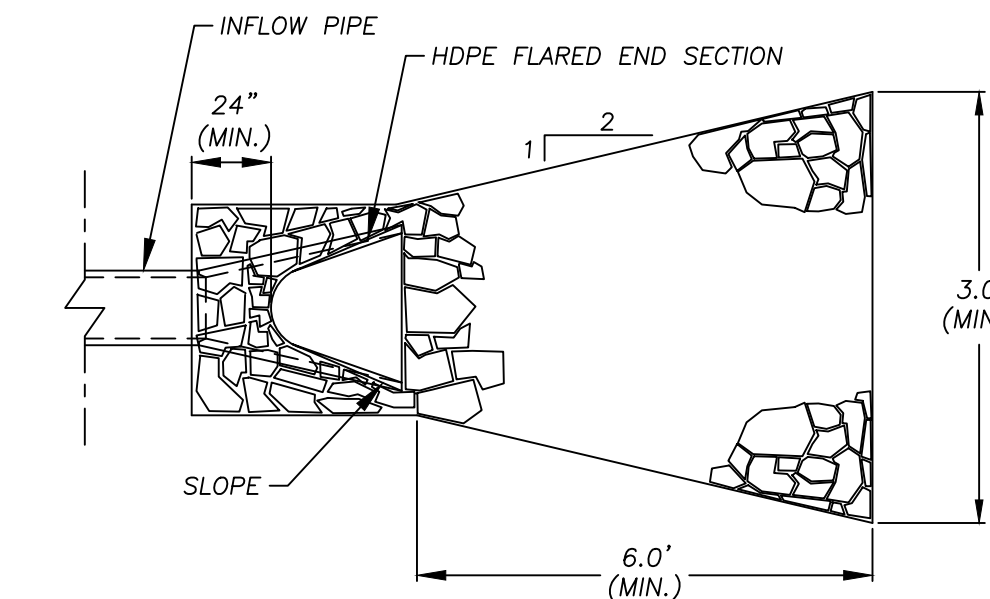

PLAN VIEW


STANDARD RIP RAP PIPE OUTLET

NO SCALE

East Longmeadow Planning Board	
Action Taken	Date
Application Filed	
Preliminary Plan Filed	
Definitive Plan Filed	
Public Hearing	
Approval of Board of Health	
Plan Approved	
Plan Endorsed	
Names of Planning Board Members	

EXTENDED DRY DETENTION BASIN

362-368 PARKER STREET
PARCEL ID: 75-10-1A, 75-11-0, 63-26-0 and 62-31-A+B
EAST LONGMEADOW MA.



PREPARED FOR:

Bretta Construction LLC
32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023

REVISIONS: DATE:

DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF
THIS DOCUMENT IS A VIOLATION
OF MASSACHUSETTS STATE LAW

SCALE: As Noted

RLA PROJ. NUMBER: 230113

DRAWING# REV.

C-6

-


RLA
R LEVESQUE
ASSOCIATES INC

Landscape Architects
Civil Engineers - Land Surveyors
Environmental Consultants



ph: 413.568.0985 fax: 413.568.0986

40 School Street
Westfield, MA 01085
rlaland.com

S:\Projects\2023\230113 - Brett - 362 & 368 Parker Street - East Longmeadow 05 Civil 3D\230113 - Definitive.dwg

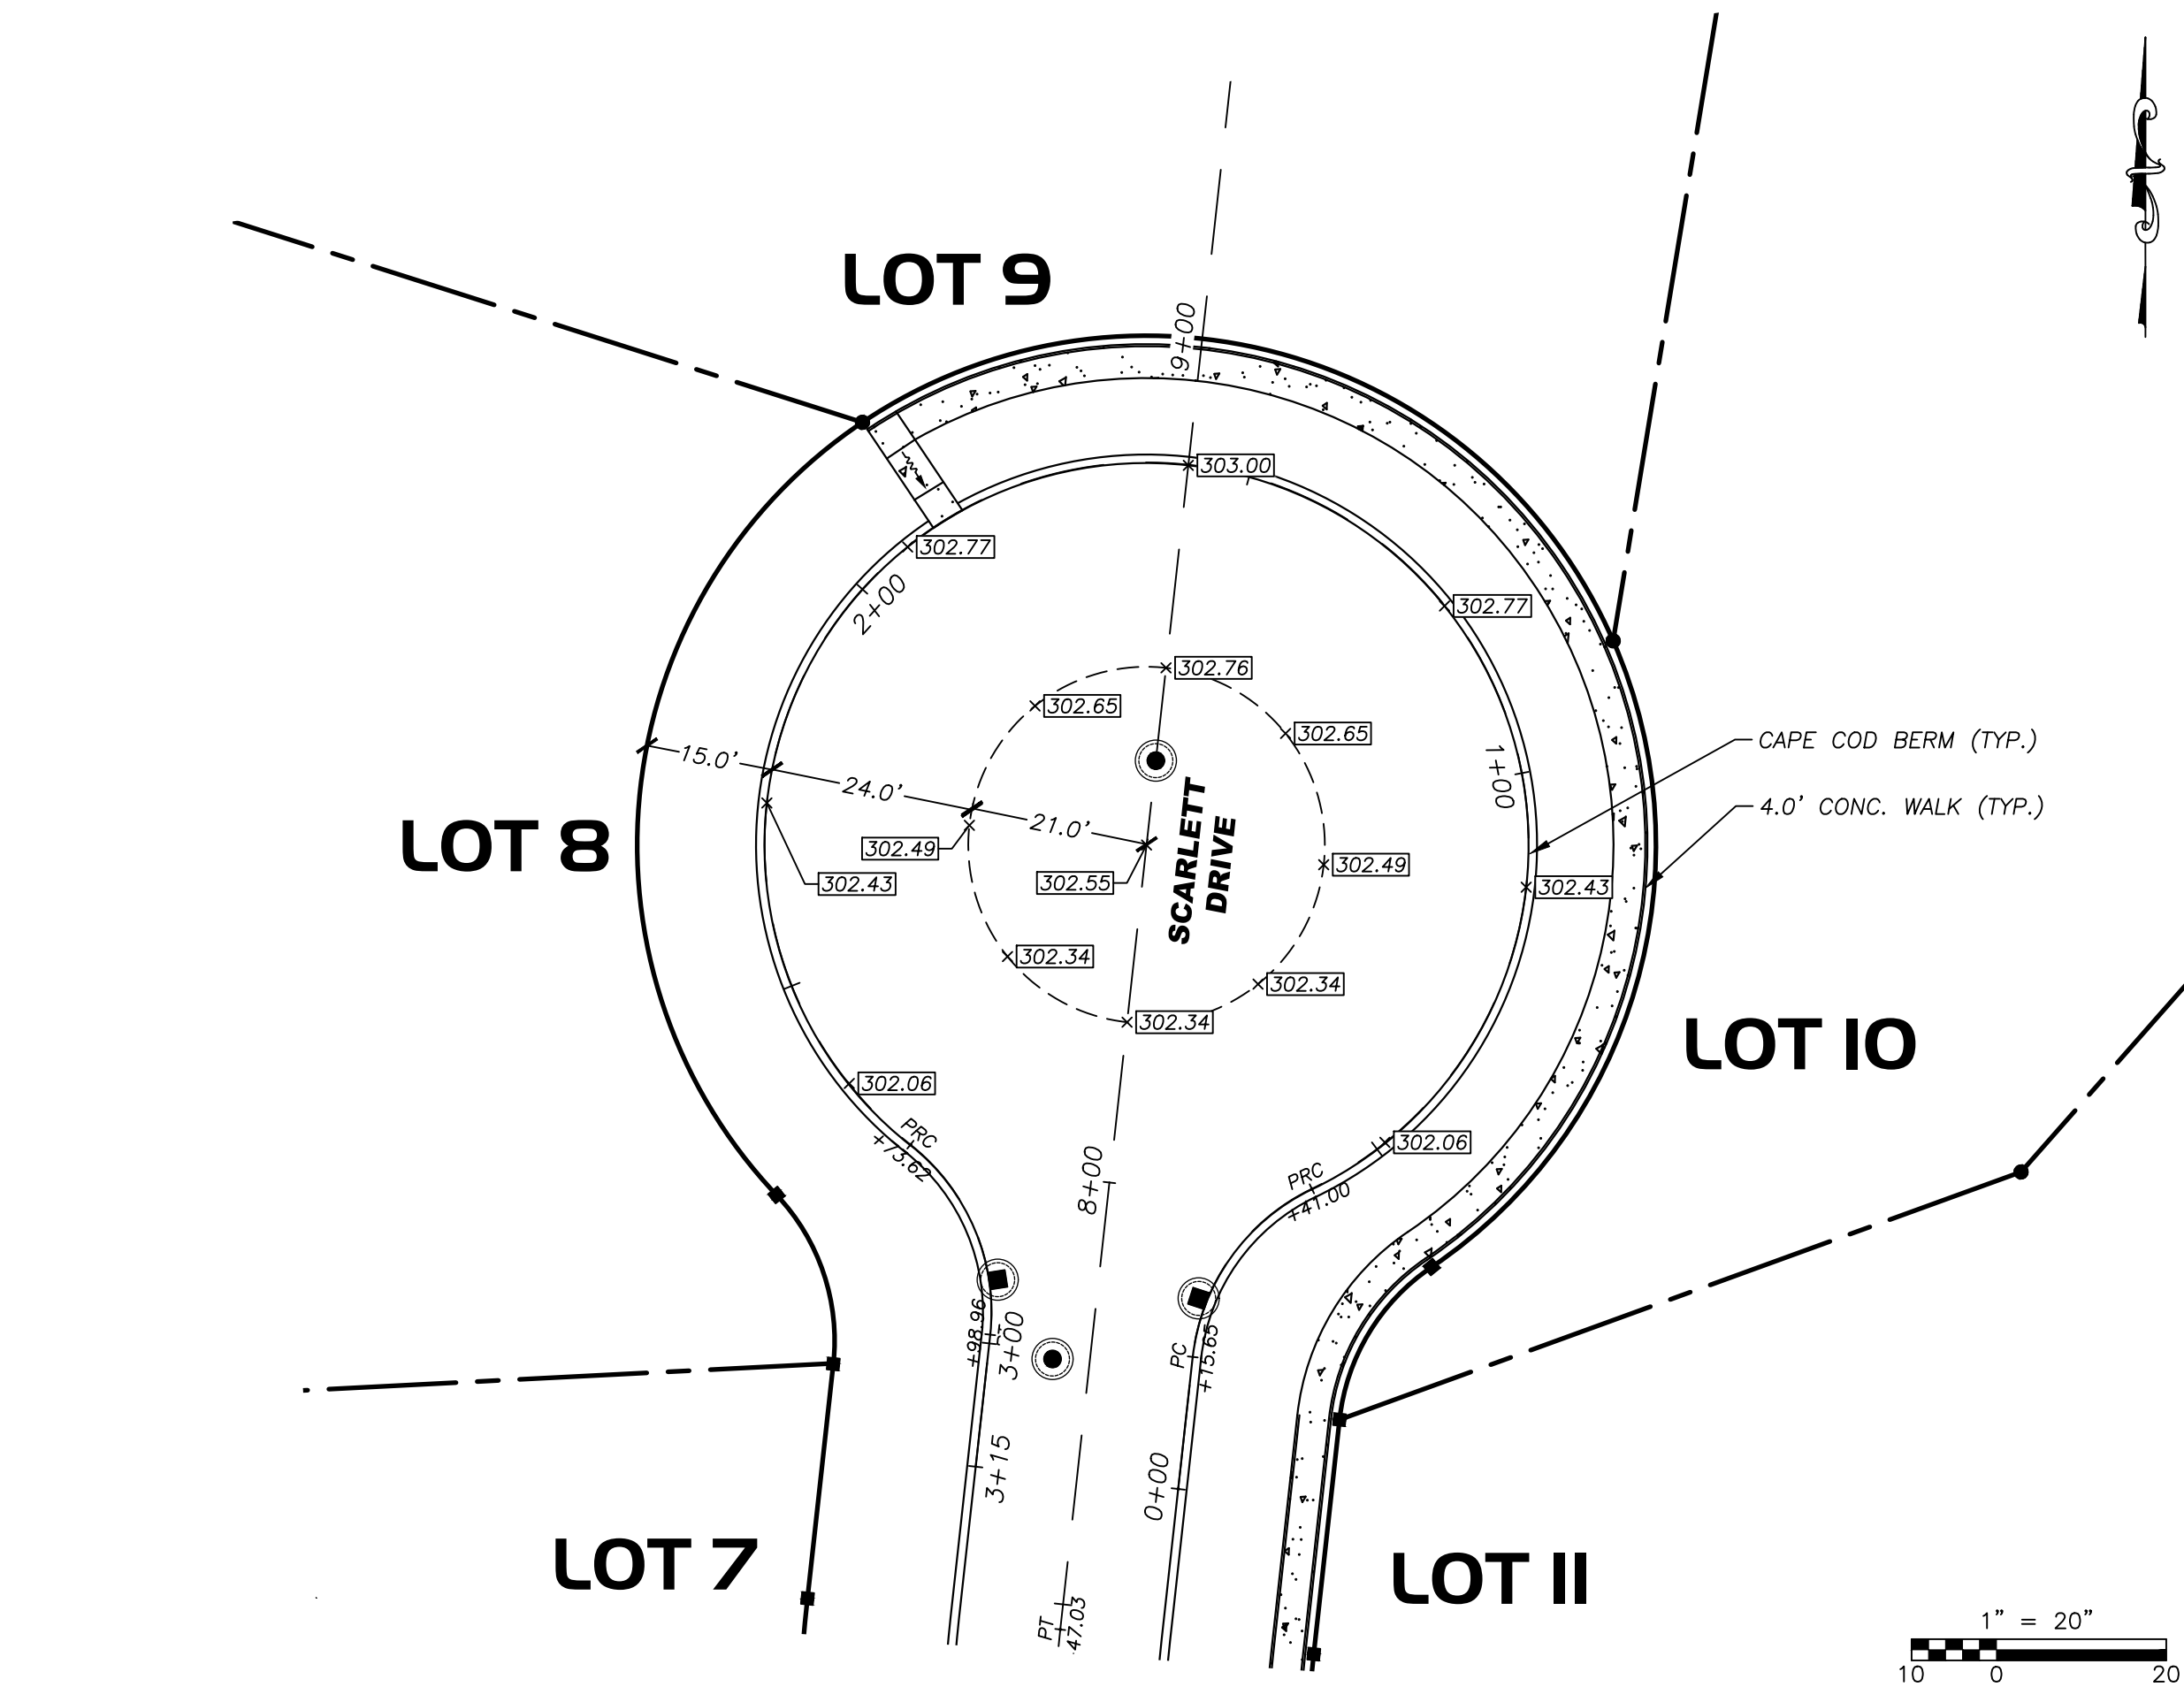


CUL-DE-SAC DETAIL - HAPPY ACRES LANE

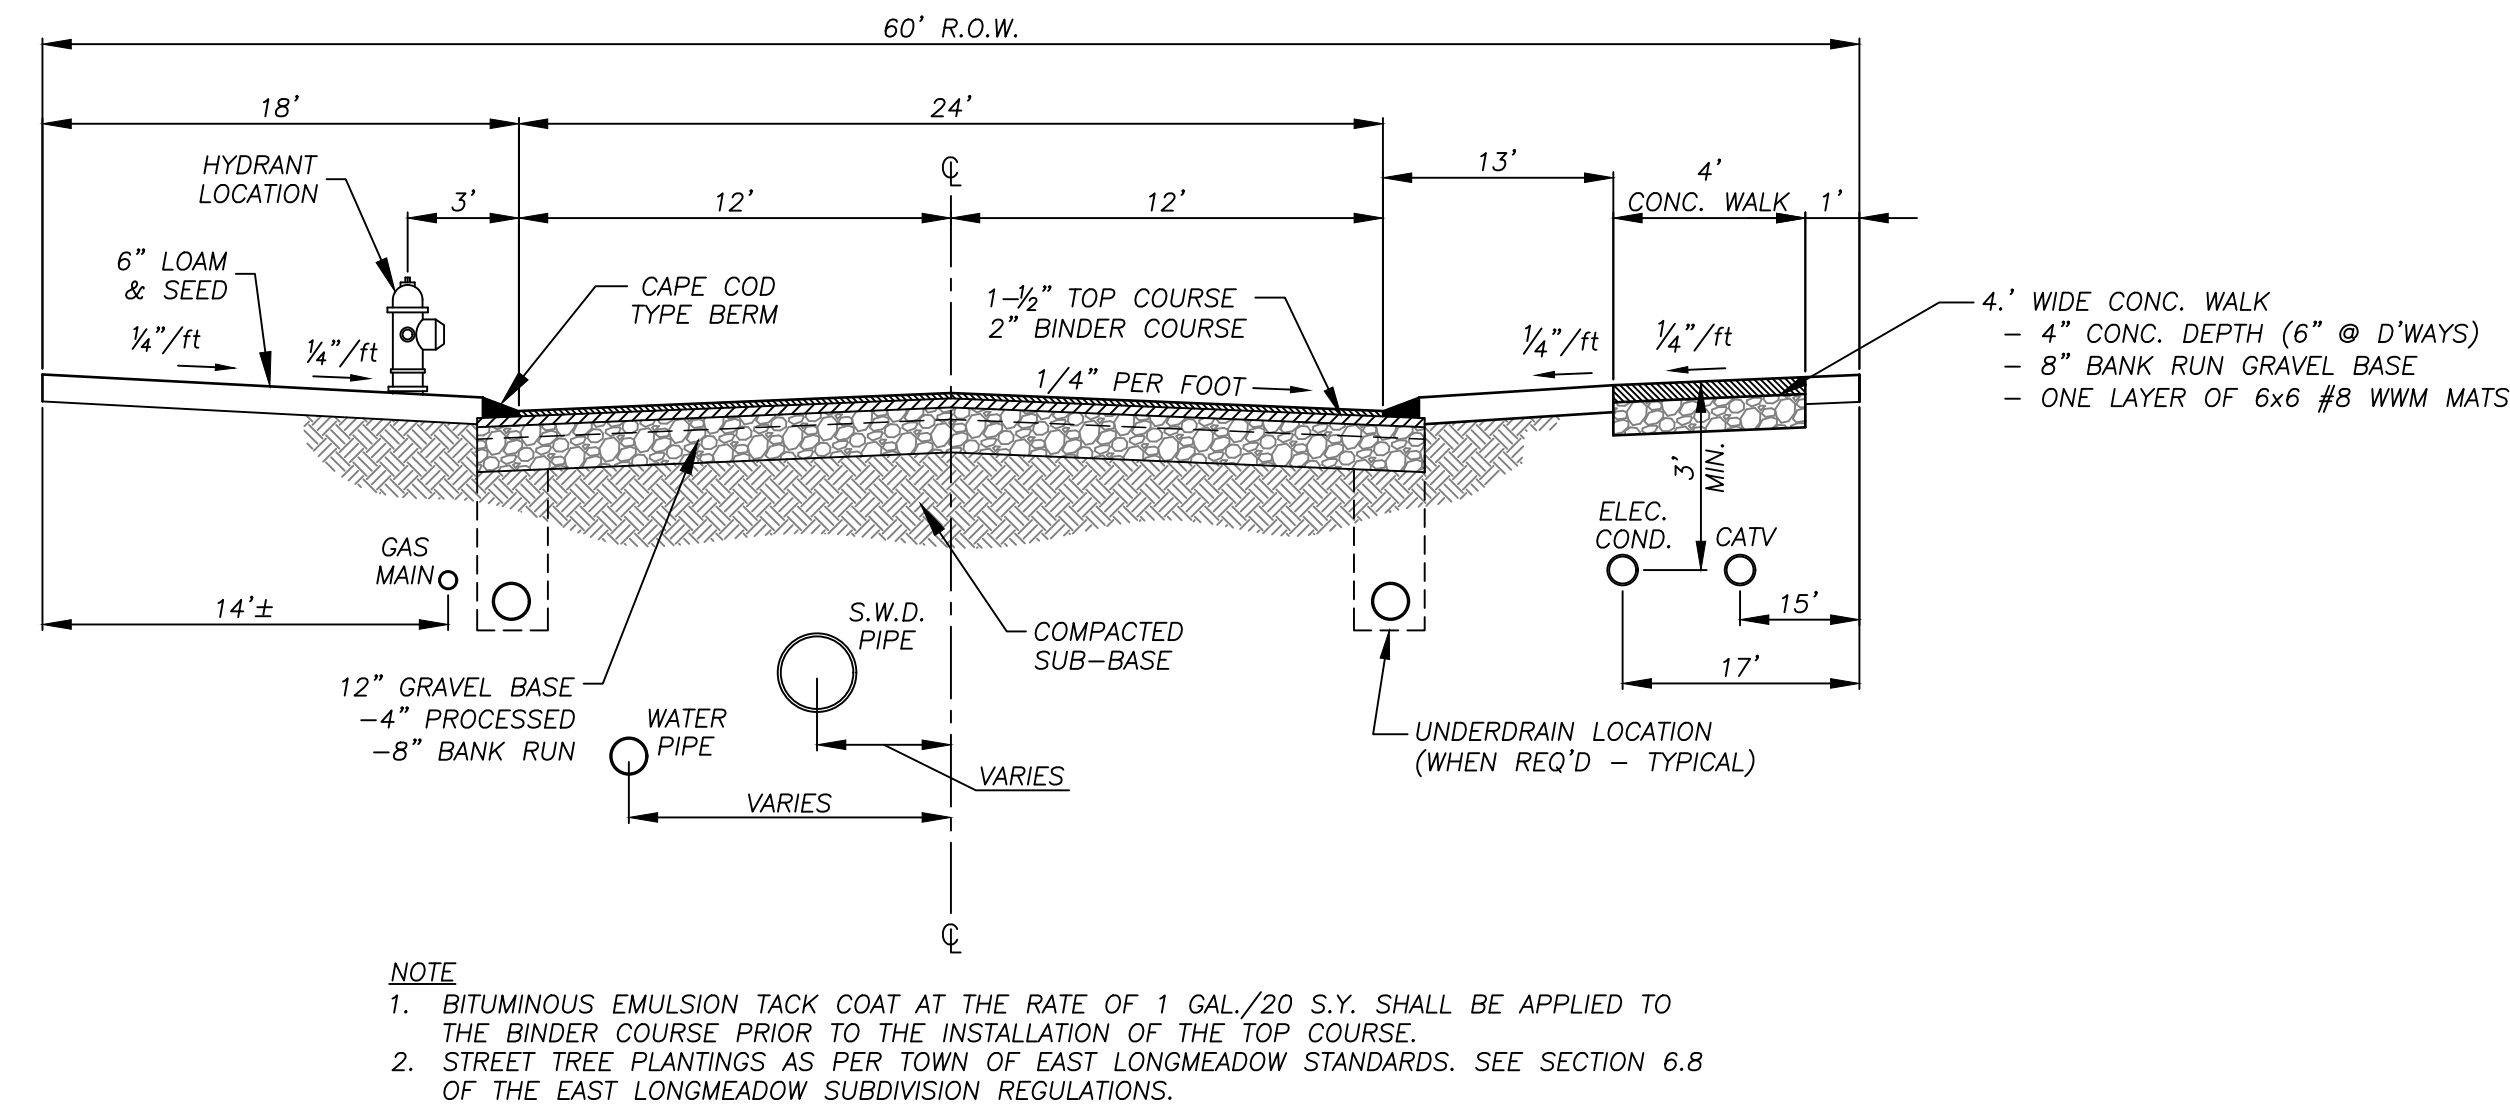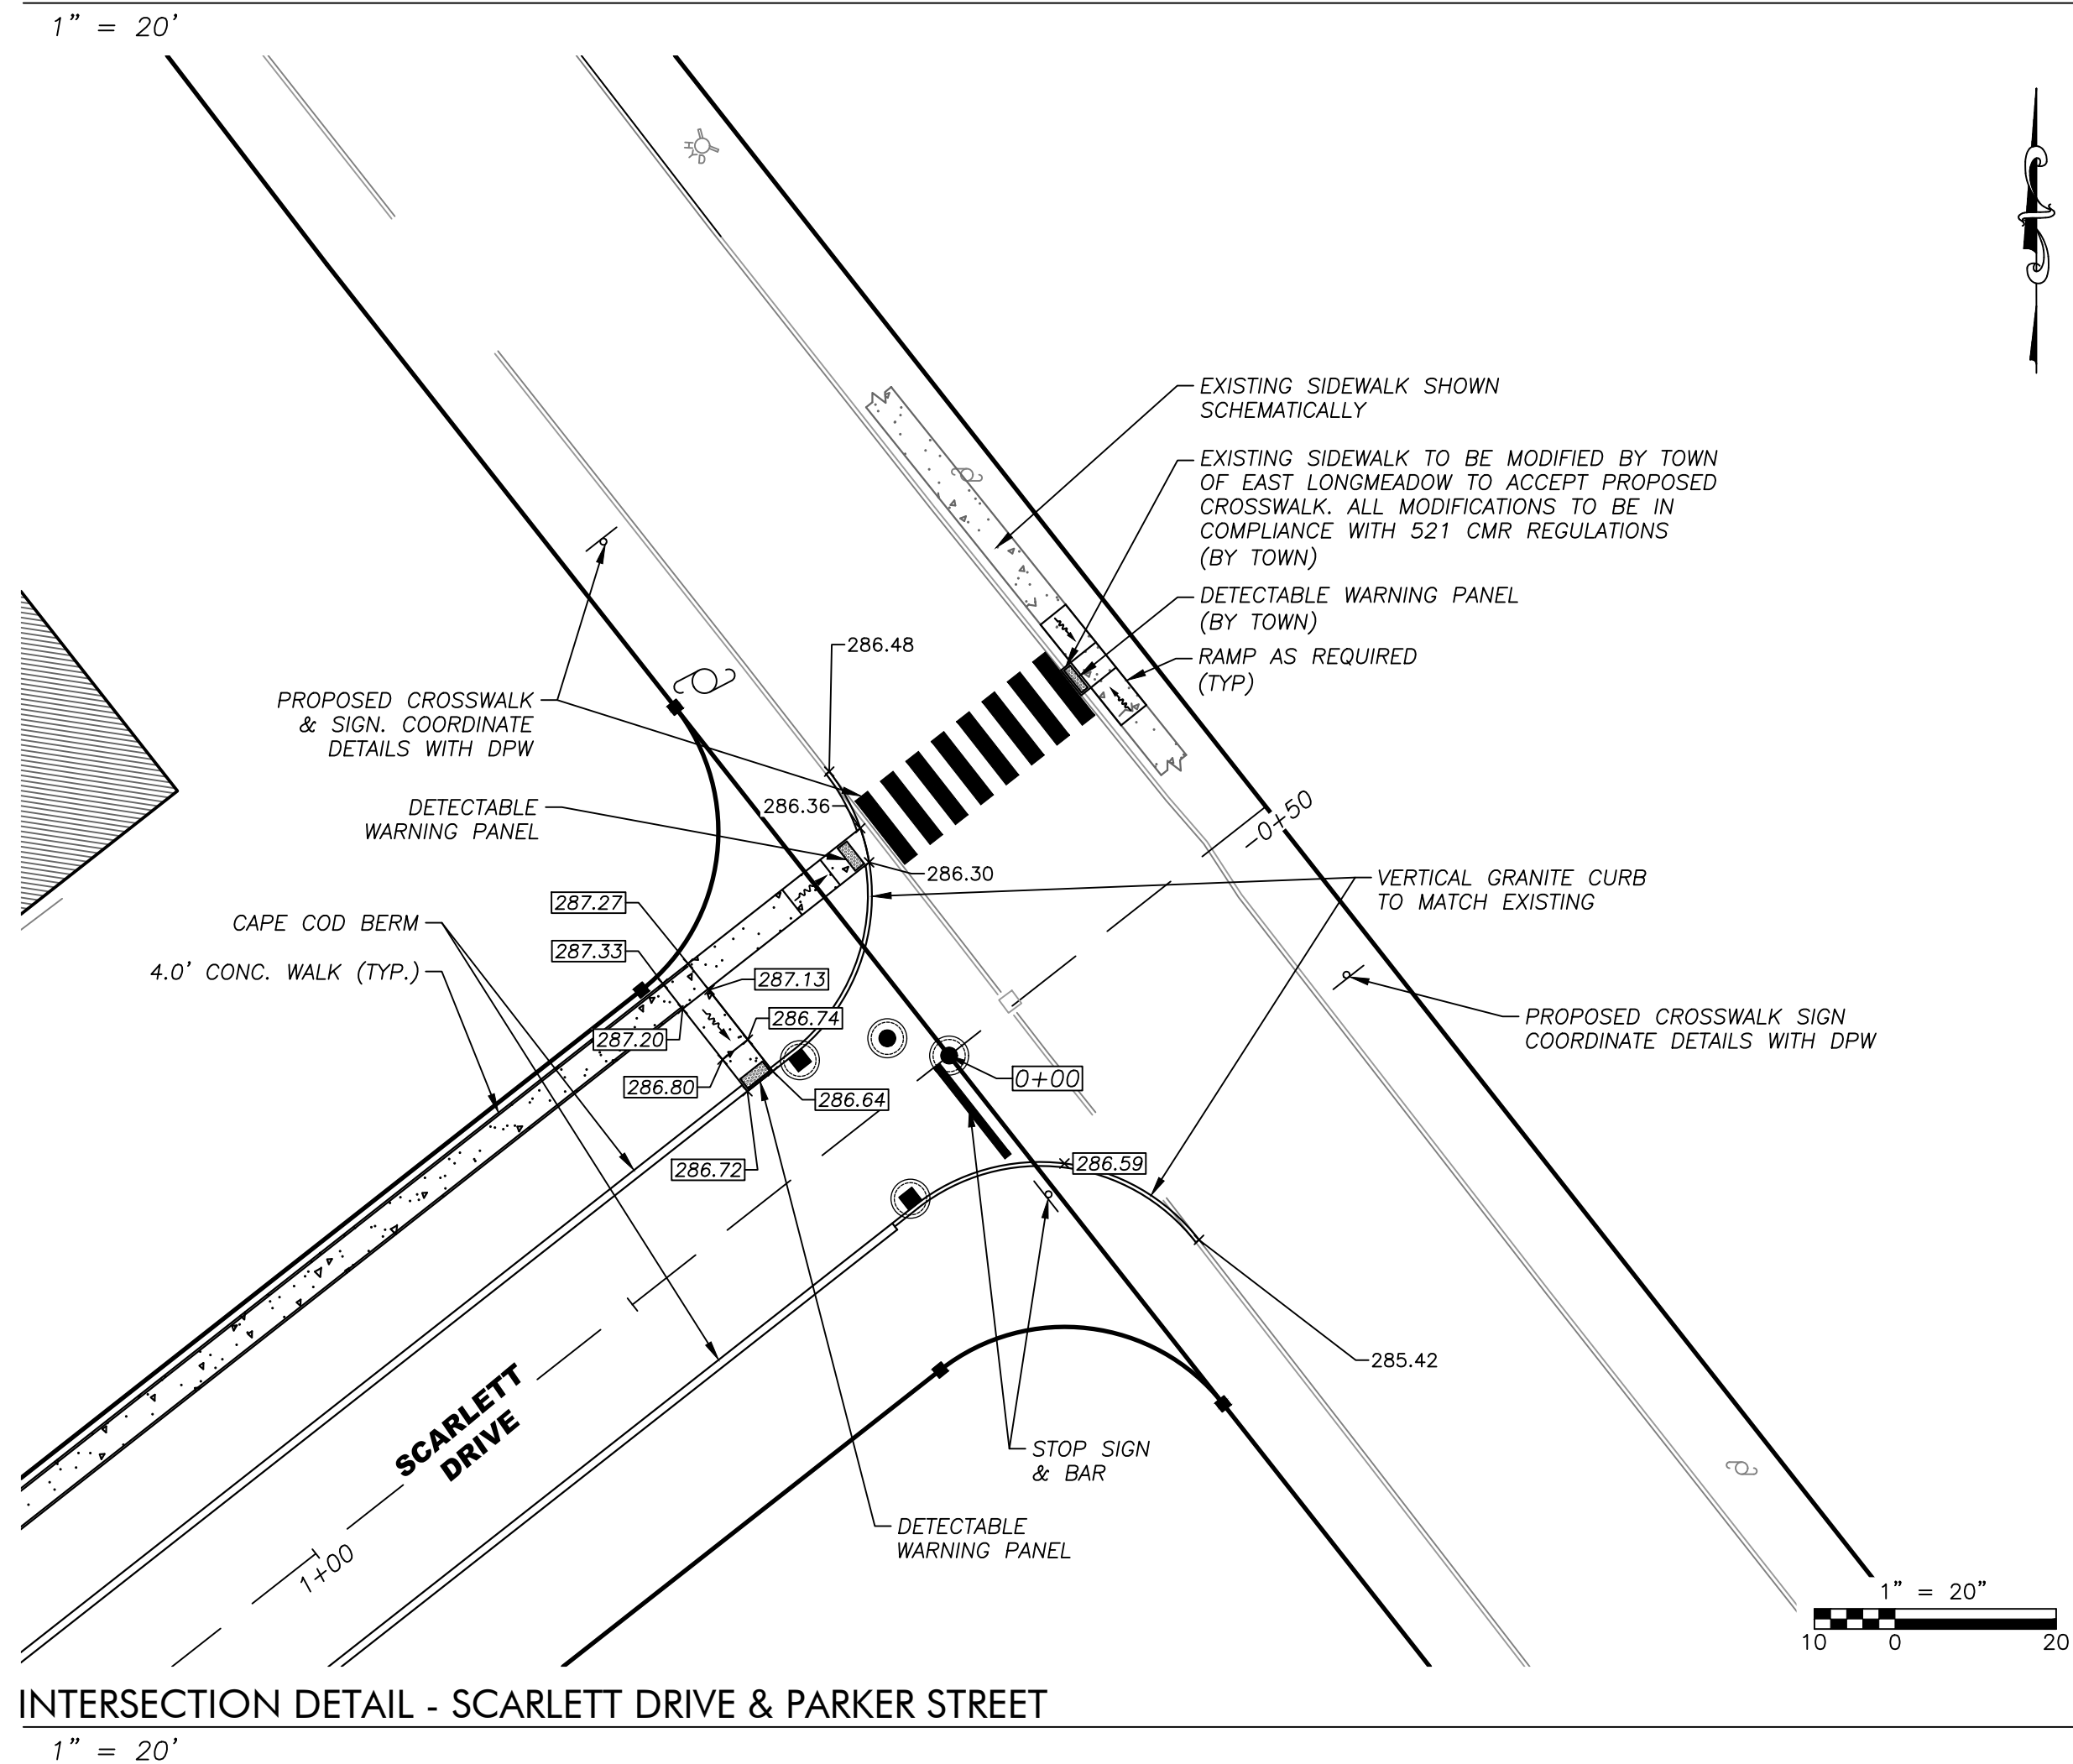

TYPICAL ROADWAY CROSS-SECTION
NO SCALE

- NOTES:
1. ALL SIDEWALK SLOPES ARE MAXIMUMS.
 2. ALL SIDEWALKS ARE TO BE CONSTRUCTED TO THE SAME SPECIFICATION FOUND IN MHD SUPPLEMENTAL SPECIFICATIONS TO THE 1988 STANDARD SPECIFICATIONS FOR HIGHWAYS AND BRIDGES, ENGLISH UNITS, JUNE 6, 2006 SECTIONS 701.00 TO 701.61 INCLUSIVE, AS AMENDED - UNLESS OTHERWISE SPECIFIED.
 3. ALL SIDEWALK RAMP ARE TO BE 400 PSI (28 DAY) PORTLAND CEMENT CONCRETE, 6%±1% AIR ENTRAINED.
 4. TOOL ALL JOINTS AND EDGES.
 5. BROOM FINISH SIDEWALK OPPOSITE TO THE DIRECTION OF TRAVEL.
 6. SIDEWALK IS REQUIRED TO BE COVERED WITH PLASTIC AND KEPT MOIST FOR MINIMUM OF 72 HOURS AFTER IT HAS SET-UP.
 7. DETECTABLE WARNING PANEL ARE TO COMPLY WITH ADA 4.29.2
 8. DETECTABLE WARNING PANEL TO BE CAST IN PLACE DETECTABLE WARNING PANEL.

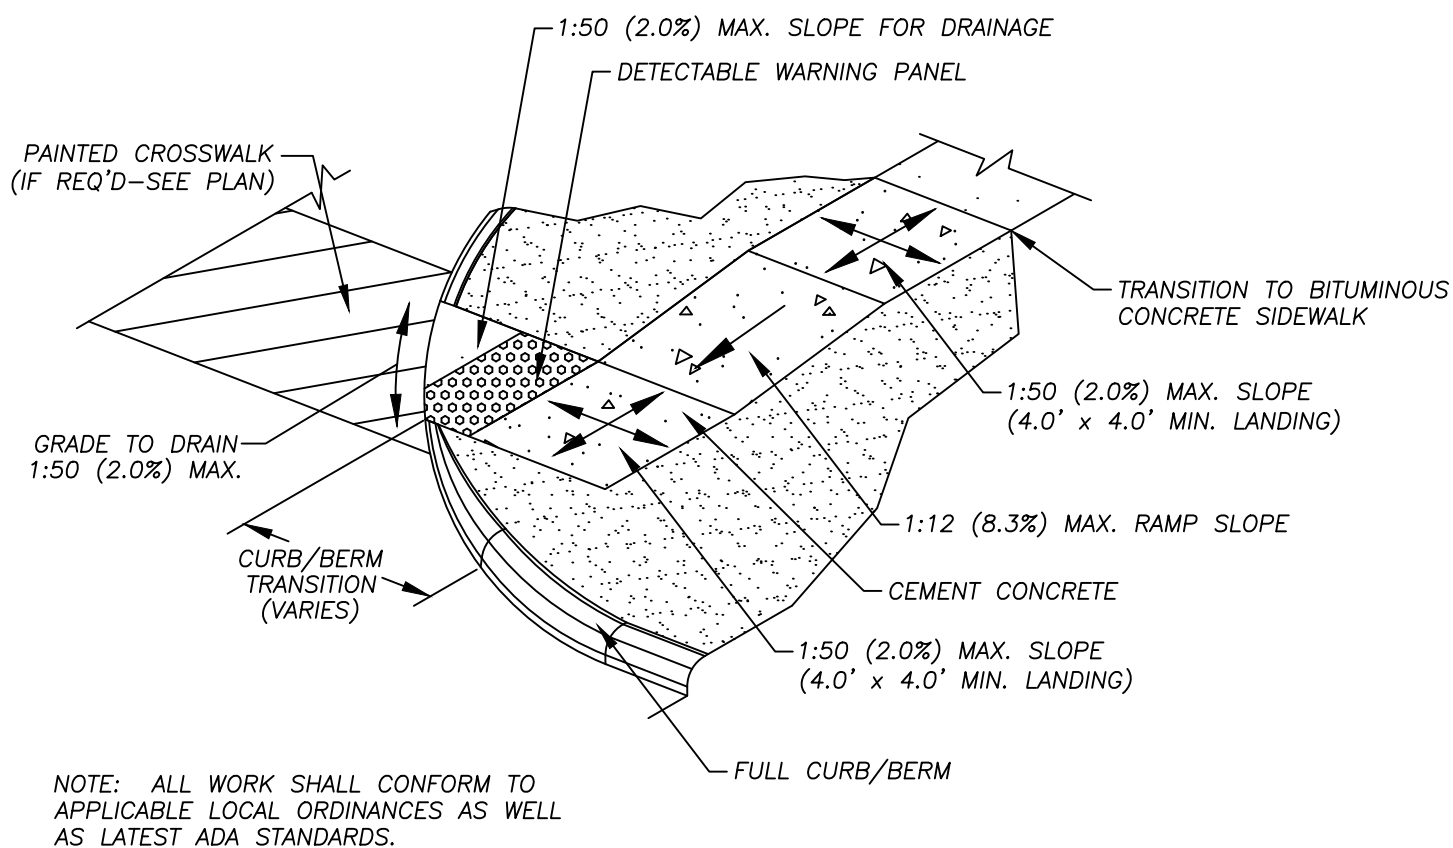

ACCESSIBLE RAMP DETAIL
NO SCALE

R L A
R LEVESQUE ASSOCIATES INC
Landscape Architects
Civil Engineers - Land Surveyors
Environmental Consultants
ph: 413.568.0985 fax: 413.568.0986
40 School Street
Westfield, MA 01085
rlaland.com

DETAILS

362-368 PARKER STREET
PARCEL ID: 75-10-A, 75-11-O, 63-26-O and 62-31-A+B
EAST LONGMEADOW MA.

PREPARED FOR:
Bretta Construction LLC
32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023

REVISIONS:	DATE:
A. Sidewalk/crosswalk modifications	12/27/23


DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF THIS DOCUMENT IS A VIOLATION OF MASSACHUSETTS STATE LAW

SCALE: As Noted


RLA PROJ. NUMBER: 230113

DRAWING#	REV.
D-1	A



1. EACH SITE ENTRANCE IS TO HAVE A TEMPORARY CONSTRUCTION ENTRANCE.
2. STONE IS TO BE 1-3/4" TO 3" ANGULAR CRUSHED STONE.
3. PLACE GEOTEXTILE OVER THE ENTIRE AREA PRIOR TO PLACING OF STONE.
4. ALL DAMAGED AREAS OF THE ROADWAY NEEDS TO BE CLEANED IMMEDIATELY.
5. ADDITIONAL STONE IS TO BE ADDED TO THE PAD AS NEEDED TO MAINTAIN THE ORIGINAL DEPTH.
6. ANY SIDEWALK DAMAGED DURING CONSTRUCTION MUST BE REPLACED AT THE CONTRACTOR'S DEVELOPER'S EXPENSE.
7. SIDEWALK MUST REMAIN PASSABLE, IF THE SIDEWALK BECOMES UNSAFE OR IMPASSABLE, A TEMPORARY SIDEWALK/ SIDEWALK DETOUR MUST BE PROVIDED.



NO SCALE

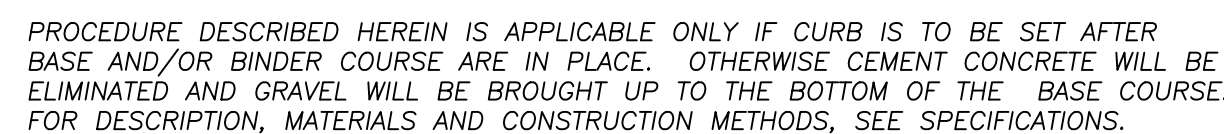

NOTES:

1. CUT NEAT LINE 6" FROM CURB LINE AND REMOVE BINDER, BASE AND STONE, AND REPLACE WITH CEMENT CONCRETE.
2. ACCEPTABLE CEMENT CONCRETE IS ANY CLASS UNDER SECTION M4 OF THE 1988 MHD STANDARD SPECIFICATIONS; ALL TEST REQUIREMENTS ARE WAIVED. HMA IS NOT AN ACCEPTABLE SUBSTITUTE
3. WHEN SET ON RADII, THE CURBING SHALL BE CUT WITH THE REQUIRED RADIUS OF CURVATURE.

NO SCALE




1. PROVIDE EXPANSION JOINTS AT MIN. 30 FT. O.C. WITH PRE- MOLDED JOINT FILLER.
2. PROVIDE CONTROL JOINTS AT 6' O.C.
3. PROVIDE BROOM FINISH IN DIRECTION PERPENDICULAR TO CURB.
4. CEMENT CONCRETE SHALL BE 4,000 PSI-TYPE II.

NO SCALE


- NOTES:**
1. ALL SIDEWALK SLOPES ARE MAXIMUMS.
 2. ALL SIDEWALKS ARE TO BE CONSTRUCTED TO THE SAME SPECIFICATION FOUND IN MHD SUPPLEMENTAL SPECIFICATIONS TO THE 1988 STANDARD SPECIFICATIONS FOR HIGHWAYS AND BRIDGES, EDITION 4, QUOTE, JUNE 6, 2006 SECTIONS 701.00 TO 701.61 INCLUSIVE, AS AMENDED - UNLESS OTHERWISE SPECIFIED.
 3. ALL SIDEWALKS ARE TO BE 4000 PSI (28 DAY) PORTLAND CEMENT CONCRETE, 6%±1% AIR ENTRAINED.
 4. TOOL ALL JOINTS AND EDGES.
 5. SIDEWALK IS TO BE PLACED IN ALTERNATING 20' LENGTHS TO ACCOUNT FOR PANEL CONTRACTION DURING DRYING.
 6. INSTALL 1/2" THICK PREFORMED EXPANSION JOINT FILLER (M.9.14.0) AT 20' INTERVALS BROOM FINISH SIDEWALK OPPOSITE TO THE DIRECTION OF TRAVEL.
 7. SIDEWALK IS REQUIRED TO BE COVERED WITH PLASTIC AND KEPT MOIST FOR MINIMUM OF 72 HOURS AFTER IT HAS SET-UP.
 8. DETECTABLE WARNING PANEL ARE TO COMPLY WITH ADA 4.29.2
 9. DETECTABLE WARNING PANEL TO BE CAST IN PLACE DETECTABLE WARNING PANEL.




NO SCALE

[illegible]

S:\Projects\2023\230113 - Bretta -362 & 368 Parker Street - East Longmeadow\05 Civil\3D\230113 - Definitive.dwg

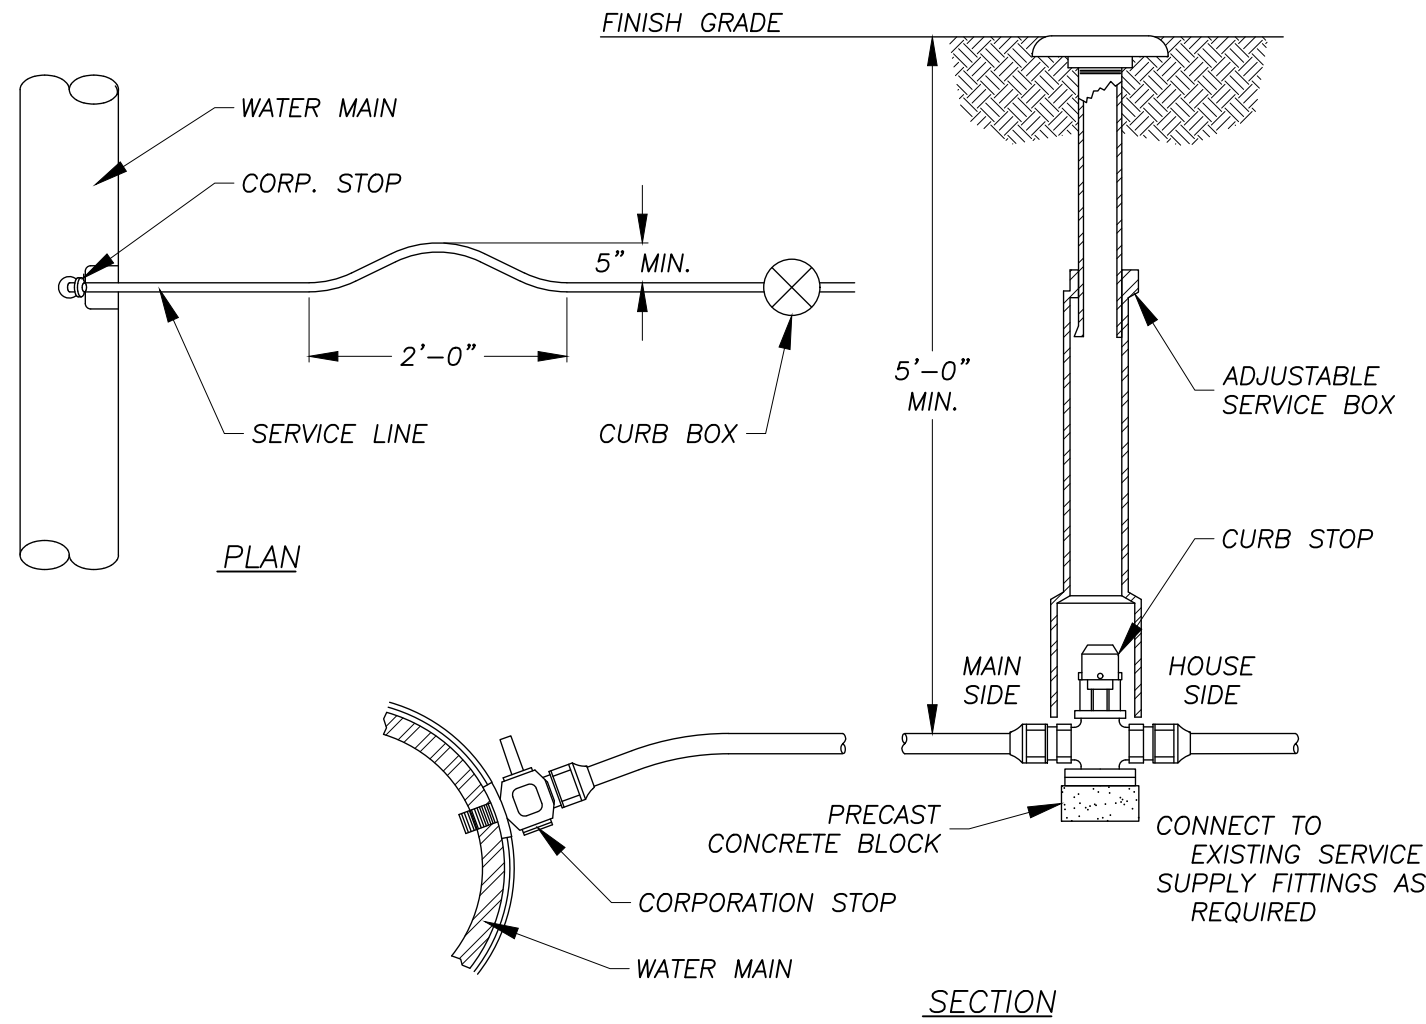


TYPICAL WATER SERVICE CONNECTION
NO SCALE

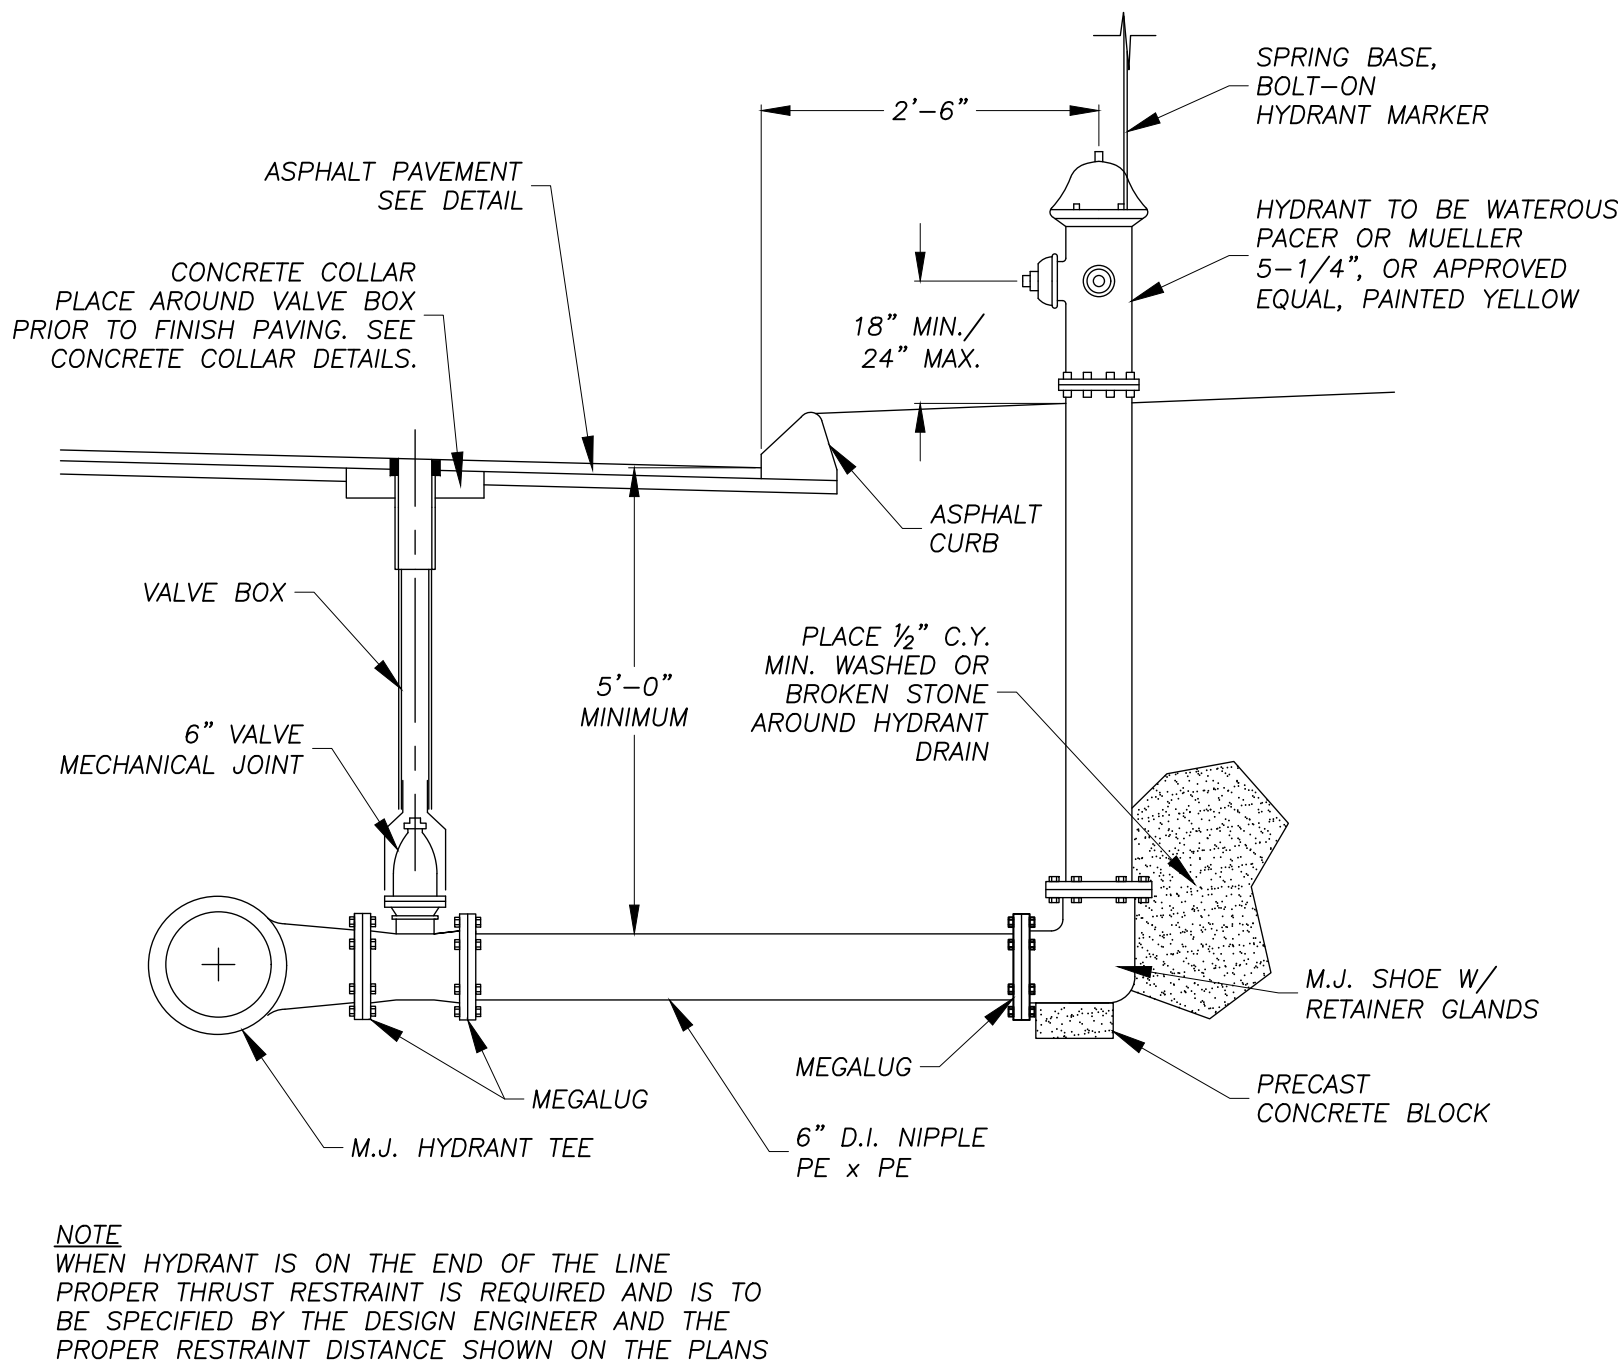

NOTE
WHEN HYDRANT IS ON THE END OF THE LINE
PROPER THRUST RESTRAINT IS REQUIRED AND IS TO
BE SPECIFIED BY THE DESIGN ENGINEER AND THE
PROPER RESTRAINT DISTANCE SHOWN ON THE PLANS

FIRE HYDRANT DETAIL
NO SCALE

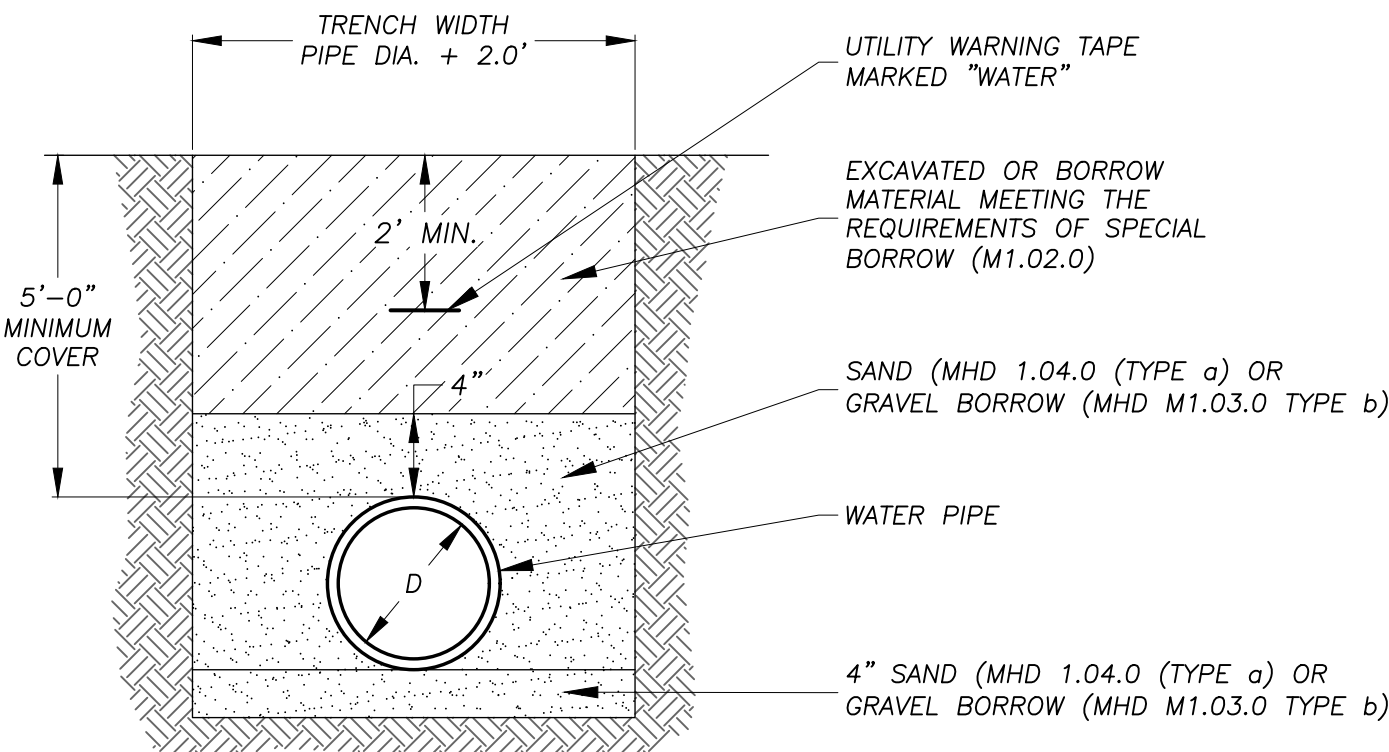


NOTES:
1.) COMPACT ALL BACKFILL MATERIAL WITH VIBRATORY PLATE
EQUIPMENT (MINIMUM TWO PASSES) TO A MINIMUM DENSITY
OF 95% OF THE STANDARD PROCTOR DENSITY AS DETERMINED
BY ASTM D698
2.) PLACE BACKFILL MATERIALS IN MAXIMUM ONE FOOT LIFTS


TYPICAL WATER MAIN TRENCH SECTION
NO SCALE

PIPE RESTRAINT SCHEDULE FOR GROUND BURIED PRESSURE PIPES									
LENGTH OF RESTRAINT REQD (FEET)								DESIGN FORCE ON RESTRAINT REQ'D (KIPS) ③	
DEFLECT. ANGLE	22½°	3¾°	45°	56¼°	67½°	78¾°	90° OR TEE	45°	90° OR TEE
PIPE									
6"	3	6	11	16	23	29	37	2.0	5.0
8"	4	8	15	22	31	41	50	3	9.0
10"	5	11	18	28	38	49	61	4.0	14.0
12"	6	13	22	33	45	59	73	6.0	20.0
14"	7	14	25	37	52	68	84	8.0	28.0
16"	8	16	28	42	59	77	95	11.0	36.0
18"	8	18	31	47	66	86	107	14.0	46.0
20"	9	20	35	53	73	95	118	17.0	57.0
24"	11	23	40	61	85	111	138	24.0	81.0
30"	13	29	50	75	105	136	170	37.0	127.0
36"	15	34	59	88	123	160	199	54.0	183.0
42"	17	39	67	101	141	184	223	73.0	250.0
48"	19	43	75	113	157	206	255	96.0	326.0

- ① THIS TABLE IS BASED ON A TEST PRESSURE OF 180 PSI (OPERATING PRESSURE + WATER HAMMER). FOR OTHER TEST PRESSURES, ALL VALUES TO BE INCREASED OR DECREASED PROPORTIONALLY
- ② IN EACH DIRECTION FROM POINT OF DEFLECTION EXCEPT FOR TEE AT WHICH ONLY THE BRANCH IN THE DIRECTION OF THE TEE STEM.
- ③ IF TIE RODS ARE USED, USE 4 RODS MINIMUM AND ADD ⅛" TO BAR DIA AS CORROSION ALLOWANCE.

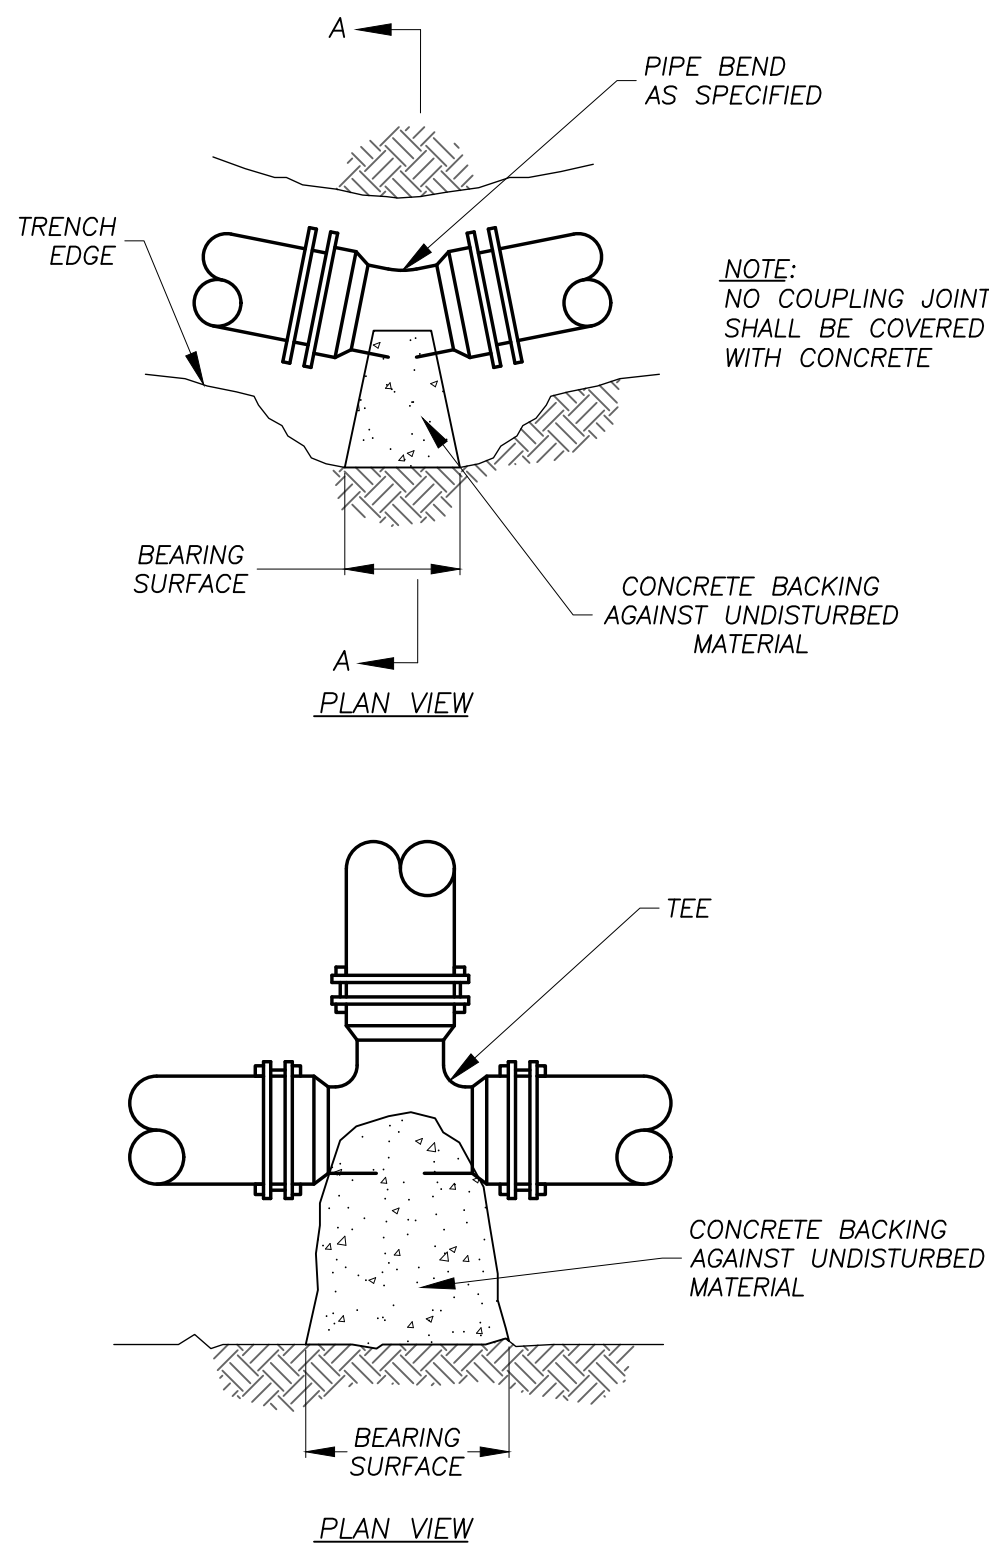

WATER MAIN · HORIZONTAL THRUST BLOCK DETAILS
NO SCALE

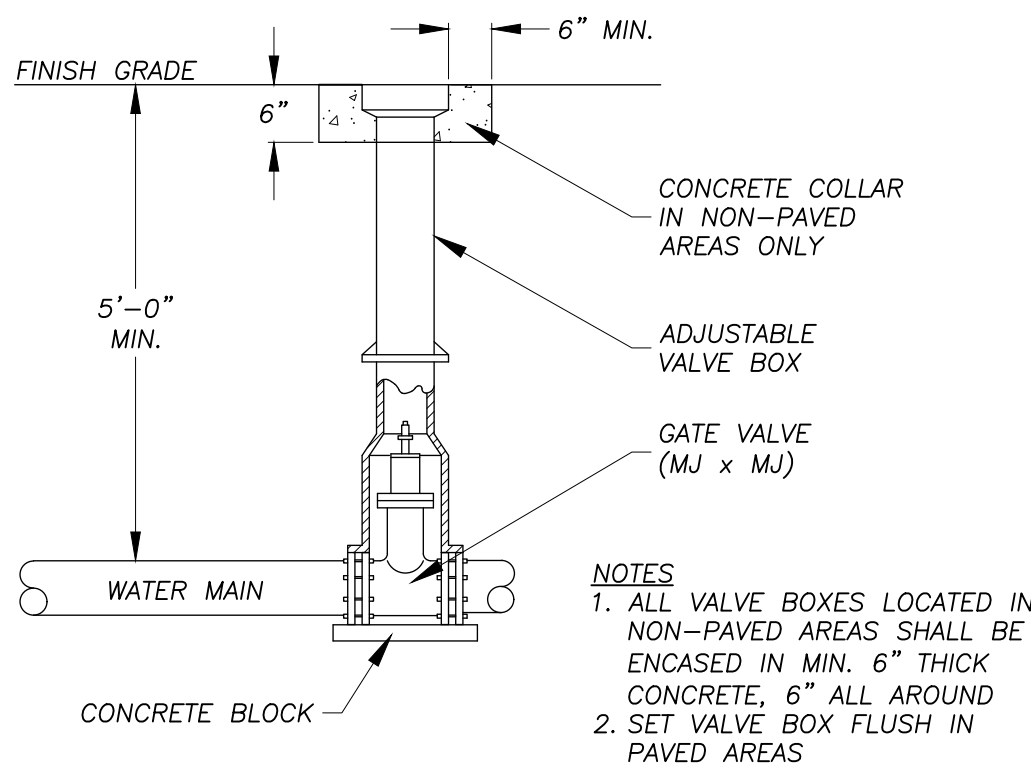


TYPICAL BURIED VALVE
NO SCALE

MINIMUM AREA OF BEARING FACE OF CONCRETE THRUST BLOCKS IN SQUARE FEET			
PIPE SIZE (INCHES)	SOIL BEARING		
	1,000 LBS./ SQ. FT.	2,000 LBS./ SQ. FT.	4,000 LBS./ SQ. FT.
DEAD END, TEE OR HYDRANT			
4 OR LESS	6	3	2
6	11	6	3
8	20	10	5
12	34	17	9
1/4 BEND - 90°			
4	8	4	2
6	16	8	4
8	28	14	7
12	56	28	14
1/8 BEND - 45°			
4	4	2	1
6	9	4	2
8	14	7	4
12	32	16	8
1/16 BEND - 22 1/2° OR LESS			
4	2	1	1
6	4	2	1
8	8	4	2
12	15	8	4


NOTES: THRUST BLOCKS

- FIGURES BASED ON 300 PSI OPERATING PLUS SURGE PRESSURE
- CONCRETE SHALL NOT BE DUMPED OVER THE FITTING. THE BLOCK MUST BE FORMED
- RETAINING RODS OR RESTRAINED JOINT PIPE AS APPROVED BY THE ENGINEER MAY BE USED IN PLACE OF THRUST BLOCKS
- PLACE 15 LB ROOF FELT BETWEEN PIPE AND CONCRETE
- CONCRETE SHALL NOT COVER PIPE JOINTS
- ALL BENDS, TEES, HYDRANTS AND DEAD ENDS SHALL BE BRACED WITH CONCRETE THRUST BLOCKS OR SUITABLE RESTRAINING DEVICES
- BEARING AREA IS AREA OF CONCRETE IN CONTACT WITH WALL OF TRENCH = H x L
- HEIGHT (H) AND LENGTH (L) AS REQUIRED TO OBTAIN AREA IN TABLE. LENGTH TO BE 2 TIMES HEIGHT
- ESTIMATED SOIL BEARING LOAD IS 2000 LBS

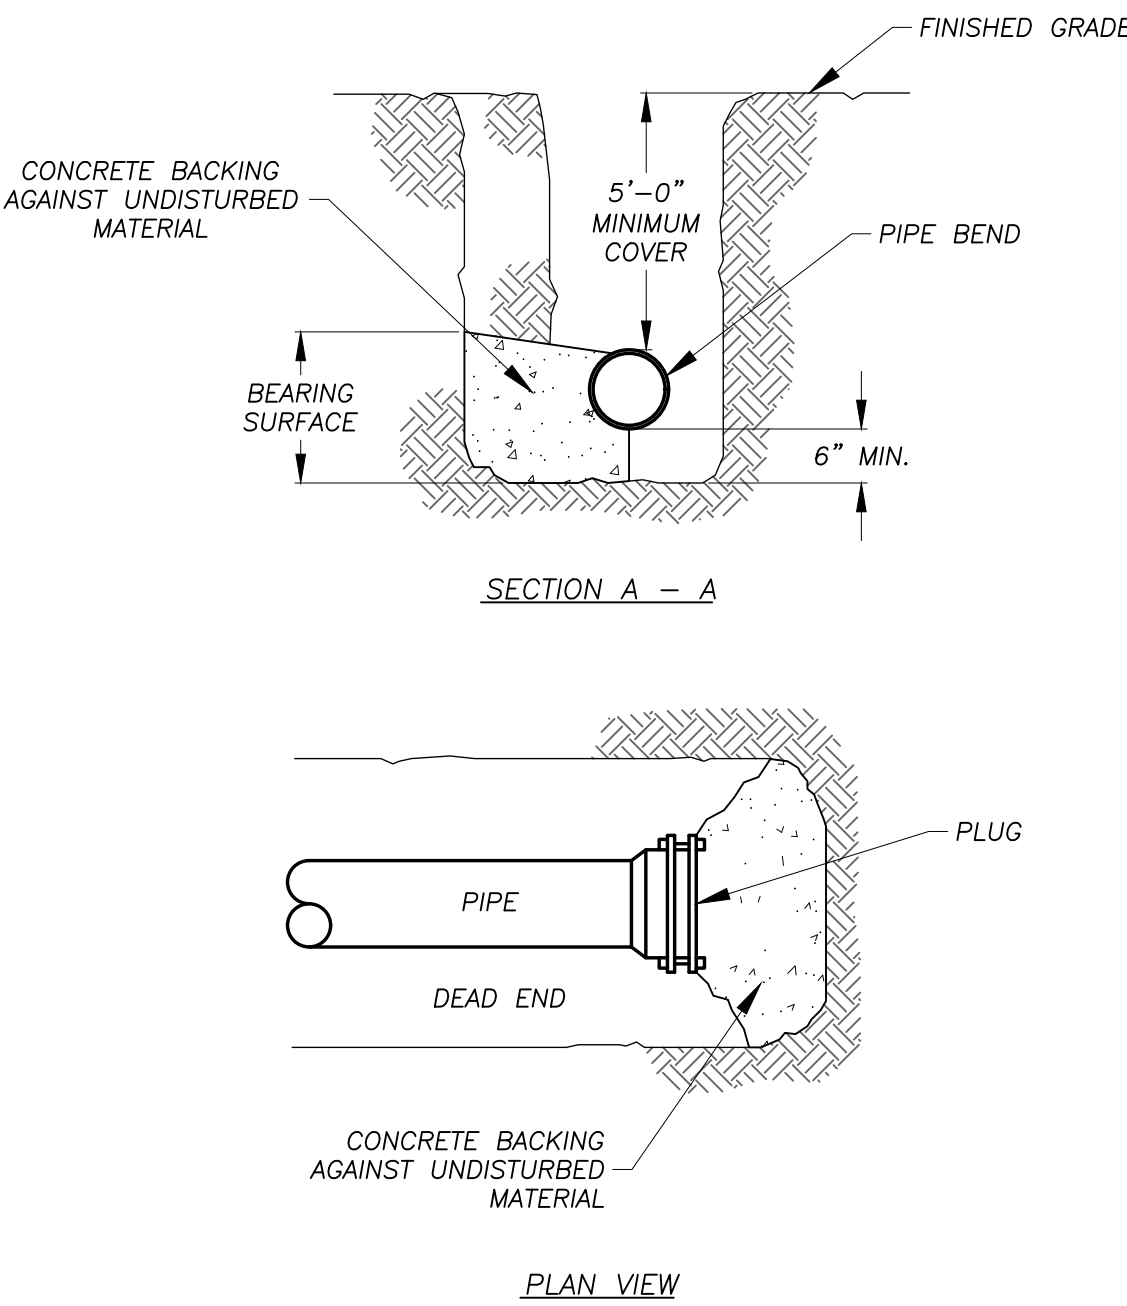

DETAILS

362-368 PARKER STREET
PARCEL ID: 75-10-1A,75-11-0,63-26-0 and 62-31-A+B
EAST LONGMEADOW MA.



PREPARED FOR:

Bretta Construction LLC
32 Eastwood Drive
Wilbraham, MA.

ISSUANCE DATE: November 17, 2023

REVISIONS: DATE:

DRAFTED BY: t.a. & R.E.L.

UNAUTHORIZED ALTERATION OF
THIS DOCUMENT IS A VIOLATION
OF MASSACHUSETTS STATE LAW

SCALE: As Noted

RLA PROJ. NUMBER: 230113

DRAWING# REV.

D-3

-

