



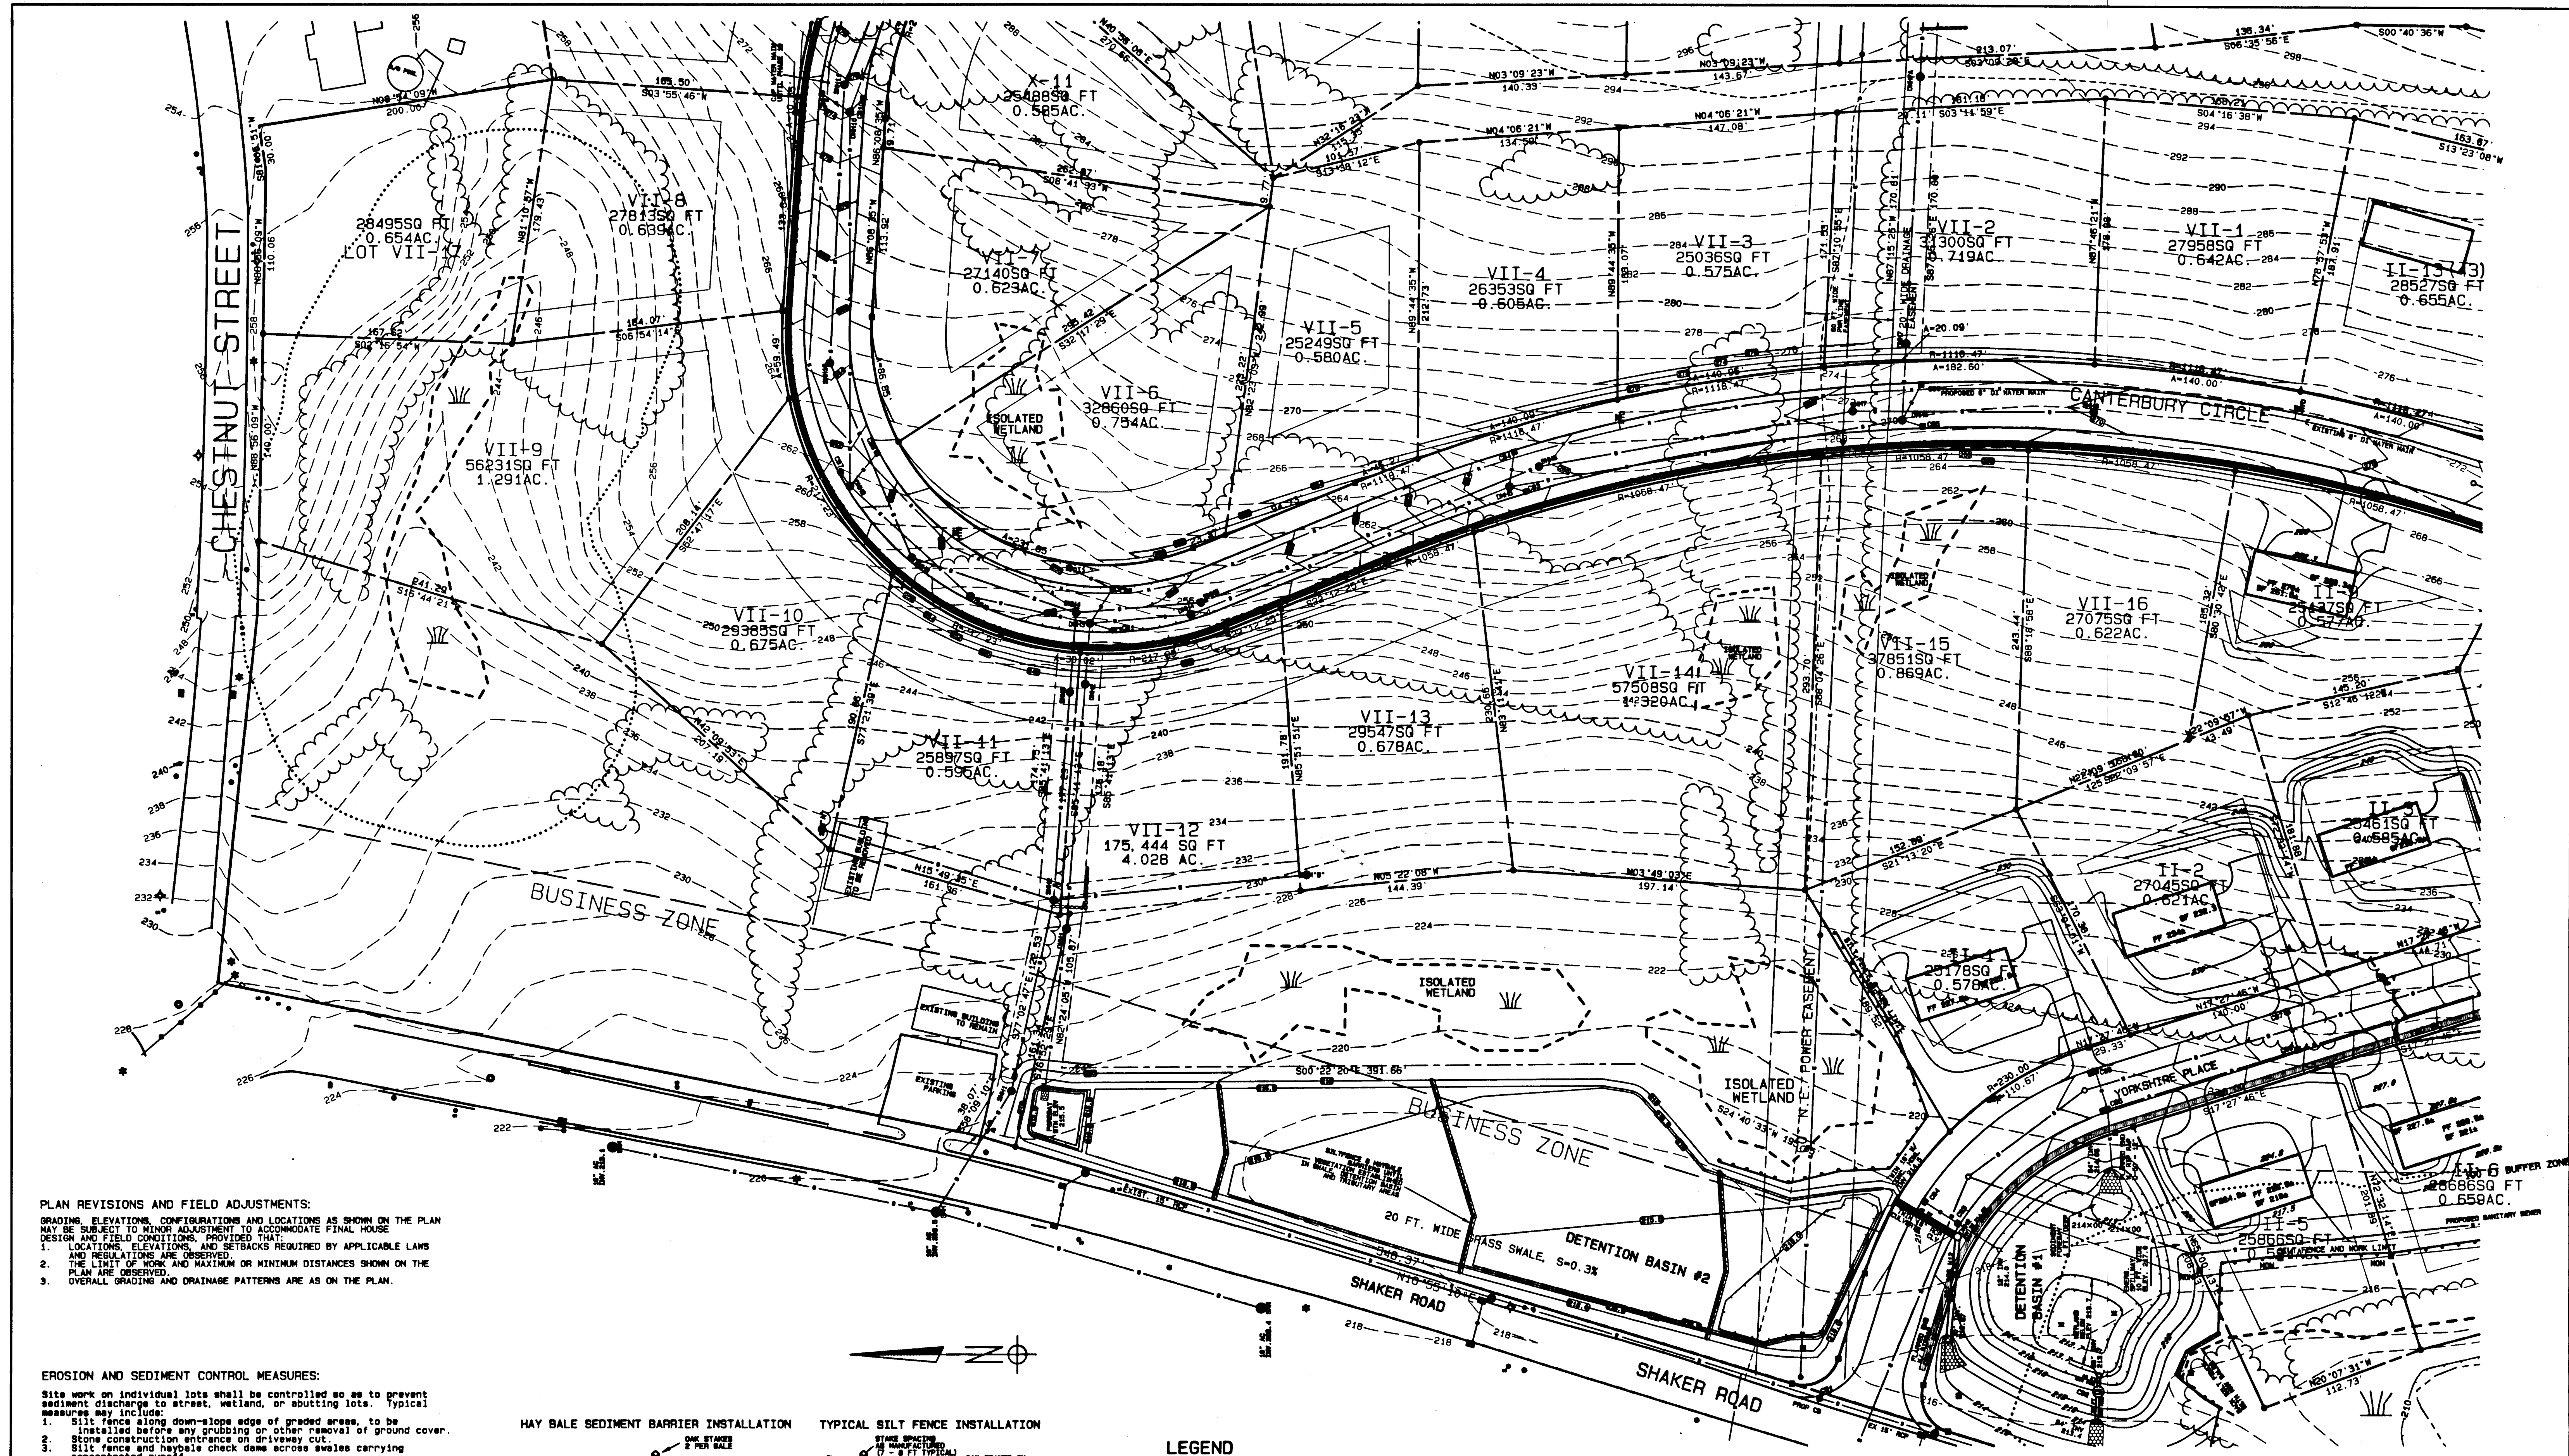

PLAN REVISIONS AND FIELD ADJUSTMENTS:
 GRADING, ELEVATIONS, CONFIGURATIONS AND LOCATIONS AS SHOWN ON THE PLAN MAY BE SUBJECT TO MINOR ADJUSTMENT TO ACCOMMODATE FINAL HOUSE DESIGN AND FIELD CONDITIONS. PROVIDE THAT:
 1. LOCATIONS, ELEVATIONS, AND SETBACKS REQUIRED BY APPLICABLE LAWS AND REGULATIONS ARE OBSERVED.
 2. THE LIMIT OF WORK AND MAXIMUM OR MINIMUM DISTANCES SHOWN ON THE PLAN ARE OBSERVED.
 3. OVERALL GRADING AND DRAINAGE PATTERNS ARE AS ON THE PLAN.


EROSION AND SEDIMENT CONTROL MEASURES:

Site work on individual lots shall be controlled so as to prevent sediment discharge to street, wetland, or adjoining lots. Typical measures may include:
 1. Silt fence along down-slope edge of graded areas, to be installed before any grubbing or other removal of ground cover.
 2. Stone construction entrance on driveway cut.
 3. Silt fence and haybale check dams across swales carrying concentrated runoff.
 4. Temporary diversions to carry runoff around open construction site.
 5. Stone-lined swales to carry concentrated runoff.
 6. Immediate revegetation of slopes, prior to finish grading of yard and lawn.
 7. Curtain drainage or stone blanket to control seepage from cut slopes.
 8. Waterbars or open-topped culverts on driveways to prevent accumulation of runoff.
 SEE CONSTRUCTION DETAIL SHEET FOR EROSION & SEDIMENT CONTROL MEASURES FOR OVERALL SUBDIVISION AND ROADWAY CONSTRUCTION.

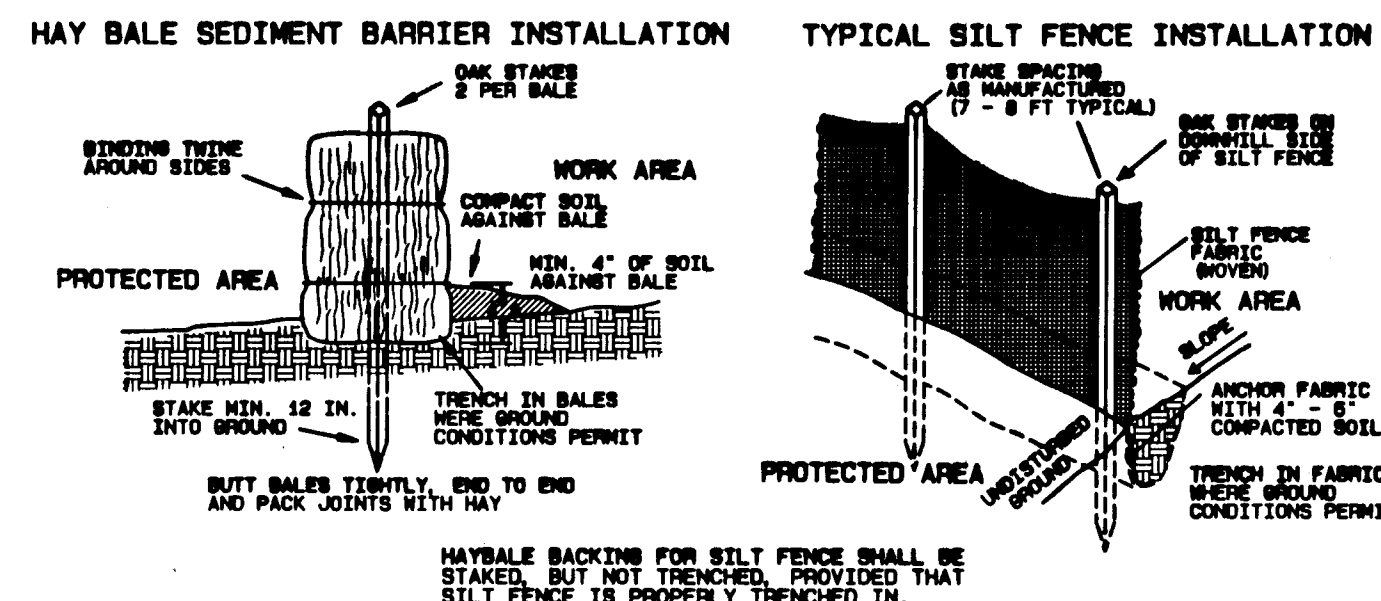

- LEGEND**
- 100 EXISTING CONTOURS
 - 100 PROPOSED CONTOURS
 - WETLAND EDGE
 - 100 FT. BUFFER ZONE
 - SILT FENCE
 - HAYBALE BARRIER
 - PROPERTY/LOT LINE
 - PROP. STORM DRAIN
 - PROP. SANITARY SEWER
 - WORK LIMIT MARKER

TOPOGRAPHY & GRADING
GREAT WOODS SUBDIVISION, PHASE VII
EAST LONGMEADOW, MASS
 OWNED BY
SIVAD NOMINEE TRUST
 PREPARED FOR
DAN ROULIER & ASSOCIATES

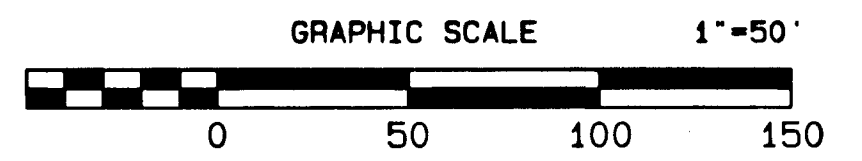

DATE: 3/3/04, REV. 5/17/04
SMITH ASSOCIATES
SURVEYORS, INC.
 105 SHAKER RD., EAST LONGMEADOW, MASS. 01026

APPROVED BY THE EAST LONGMEADOW PLANNING BOARD
 DATE: 7/13/04
 Michael R. Roulrier
 CHAIRMAN

